

APPENDIX A:

Site Layout Plan

FIGURE 1: Project Location



APPENDIX B:

Traffic Impact Analysis

New Carrollton Metro Station

Prince George's County, Maryland
August 10, 2016

Traffic Impact Analysis

Prepared for:
Urban Atlantic



TABLE OF CONTENTS

• INTRODUCTION and SUMMARY OF FINDINGS	1
1A Site Location Map	3
1B Preliminary Site Plan	4
• EXISTING TRAFFIC CONDITIONS	5
2 Existing Lane Use	6
3 2016 Existing Peak Hour Traffic Volumes	7
• BACKGROUND TRAFFIC CONDITIONS.....	8
4 Regional Traffic Growth (0.5% Annually for 10 Years)	10
5 2026 Base Peak Hour Traffic Volumes.....	11
6 Location Map for Approved Developments	12
7 Trip Generation for Approved Background Developments.....	13
8 Combined Trips Generated by Approved Developments.....	14
9A 2026 Background Peak Hour Traffic Volumes	15
9B Revised Access Configuration	16
9C Traffic Adjustment Due to Revised Access Configuration	17
9D Adjusted 2026 Background Peak Hour Traffic Volumes.....	18
• NEW CARROLLTON METRO STATION	19
10 Trip Generation Rates for New Carrollton TOD.....	21
11 Trip Generation Totals for New Carrollton TOD	22
12 Trip Assignment for Subject Site.....	23
13 2026 Total Peak Hour Traffic Volumes	24
14 Results of Intersection Capacity Analyses (CLV)	25
15 Future Lane Use	26
• RESULTS, RECOMMENDATIONS, AND CONCLUSIONS.....	27

APPENDICES

APPENDIX A – Scoping Letter, Intersection Turning Movement Counts, and Photos

APPENDIX B – Intersection Capacity Analysis Worksheets

APPENDIX C – Trip Assignment for Background Developments

APPENDIX D – Trip Generation Details & Trip Assignment for Subject Site

APPENDIX E – Vissim Simulation Results

Prepared by: Glenn E. Cook
Wes Guckert, PTP
Fuhsiu Huang, P.E., PTOE
GEC:rek
(F:\2010\2010-1023A\wp\TIS_Rev3.docx)

The Traffic Group, Inc. ®
Traffic Engineers & Transportation Planners

Merging Innovation and Excellence®

CORPORATE OFFICE
9900 Franklin Square Drive, Suite H
Baltimore, Maryland 21236
410-931-6600 Fax: 410-931-6601
1-800-583-8411
www.trafficgroup.com

INTRODUCTION AND SUMMARY OF FINDINGS

Study Purpose

This Traffic Impact Analysis was prepared to address the proposed development of the “south side” of the New Carrollton Metro Station located in Prince George’s County, Maryland. This property has development proposed along the north and south sides of the track, both of which are within close proximity to the Metro Station/Marc Station/Amtrak Station Tracks.

Study Criteria/Methodology

This Traffic Impact Analysis was prepared in accordance with the requirements outlined by the Maryland-National Capital Park and Planning Commission (M-NCPPC) and in coordination with WMATA and the Maryland State Highway Administration (SHA). The parameters for this traffic study were established in an approved Traffic Impact Study Scoping Agreement executed with M-NCPPC. A copy of this agreement is contained in Appendix A of this report.

Exhibit 1A was prepared to show the location of the subject property and the intersections that were determined to be critical to this analysis. It should be noted that Mainline I-495, Mainline MD-410, and Mainline US 50 were not studied or analyzed as part of this report.

Scope of Services

The following is the scope of work undertaken in this analysis.


- Review of the AECOM Traffic Study prepared for WMATA.
- Preparation and submittal of a Scoping Letter dated May 4, 2016 to M-NCPPC outlining trip distribution and trip generation and the suggested study area for the proposed study.
- Utilization of the trip distributions established in the AECOM Study for the background development that was contained in the AECOM Study for the south side of the New Carrollton Metro Station.
- Review of M-NCPPC’s PG’s Atlas information for background developments planned in the vicinity of the subject site.

- Trip Generation Rates and Totals used by both M-NCPPC and AECOM for the Transit Overlay District (TOD).
- Conduct Capacity Analysis utilizing the Critical Lane Volume Technology detailed by the M-NCPPC Guidelines.
- Conduct a Vissim simulation and evaluation of the study area roadways.

Summary of Findings and Recommendations

The following sections of this report will outline the methodology used to undertake this traffic study as well as the results and recommendations resulting from the analysis.

The methodology used to undertake this study is contained in the sections to follow.

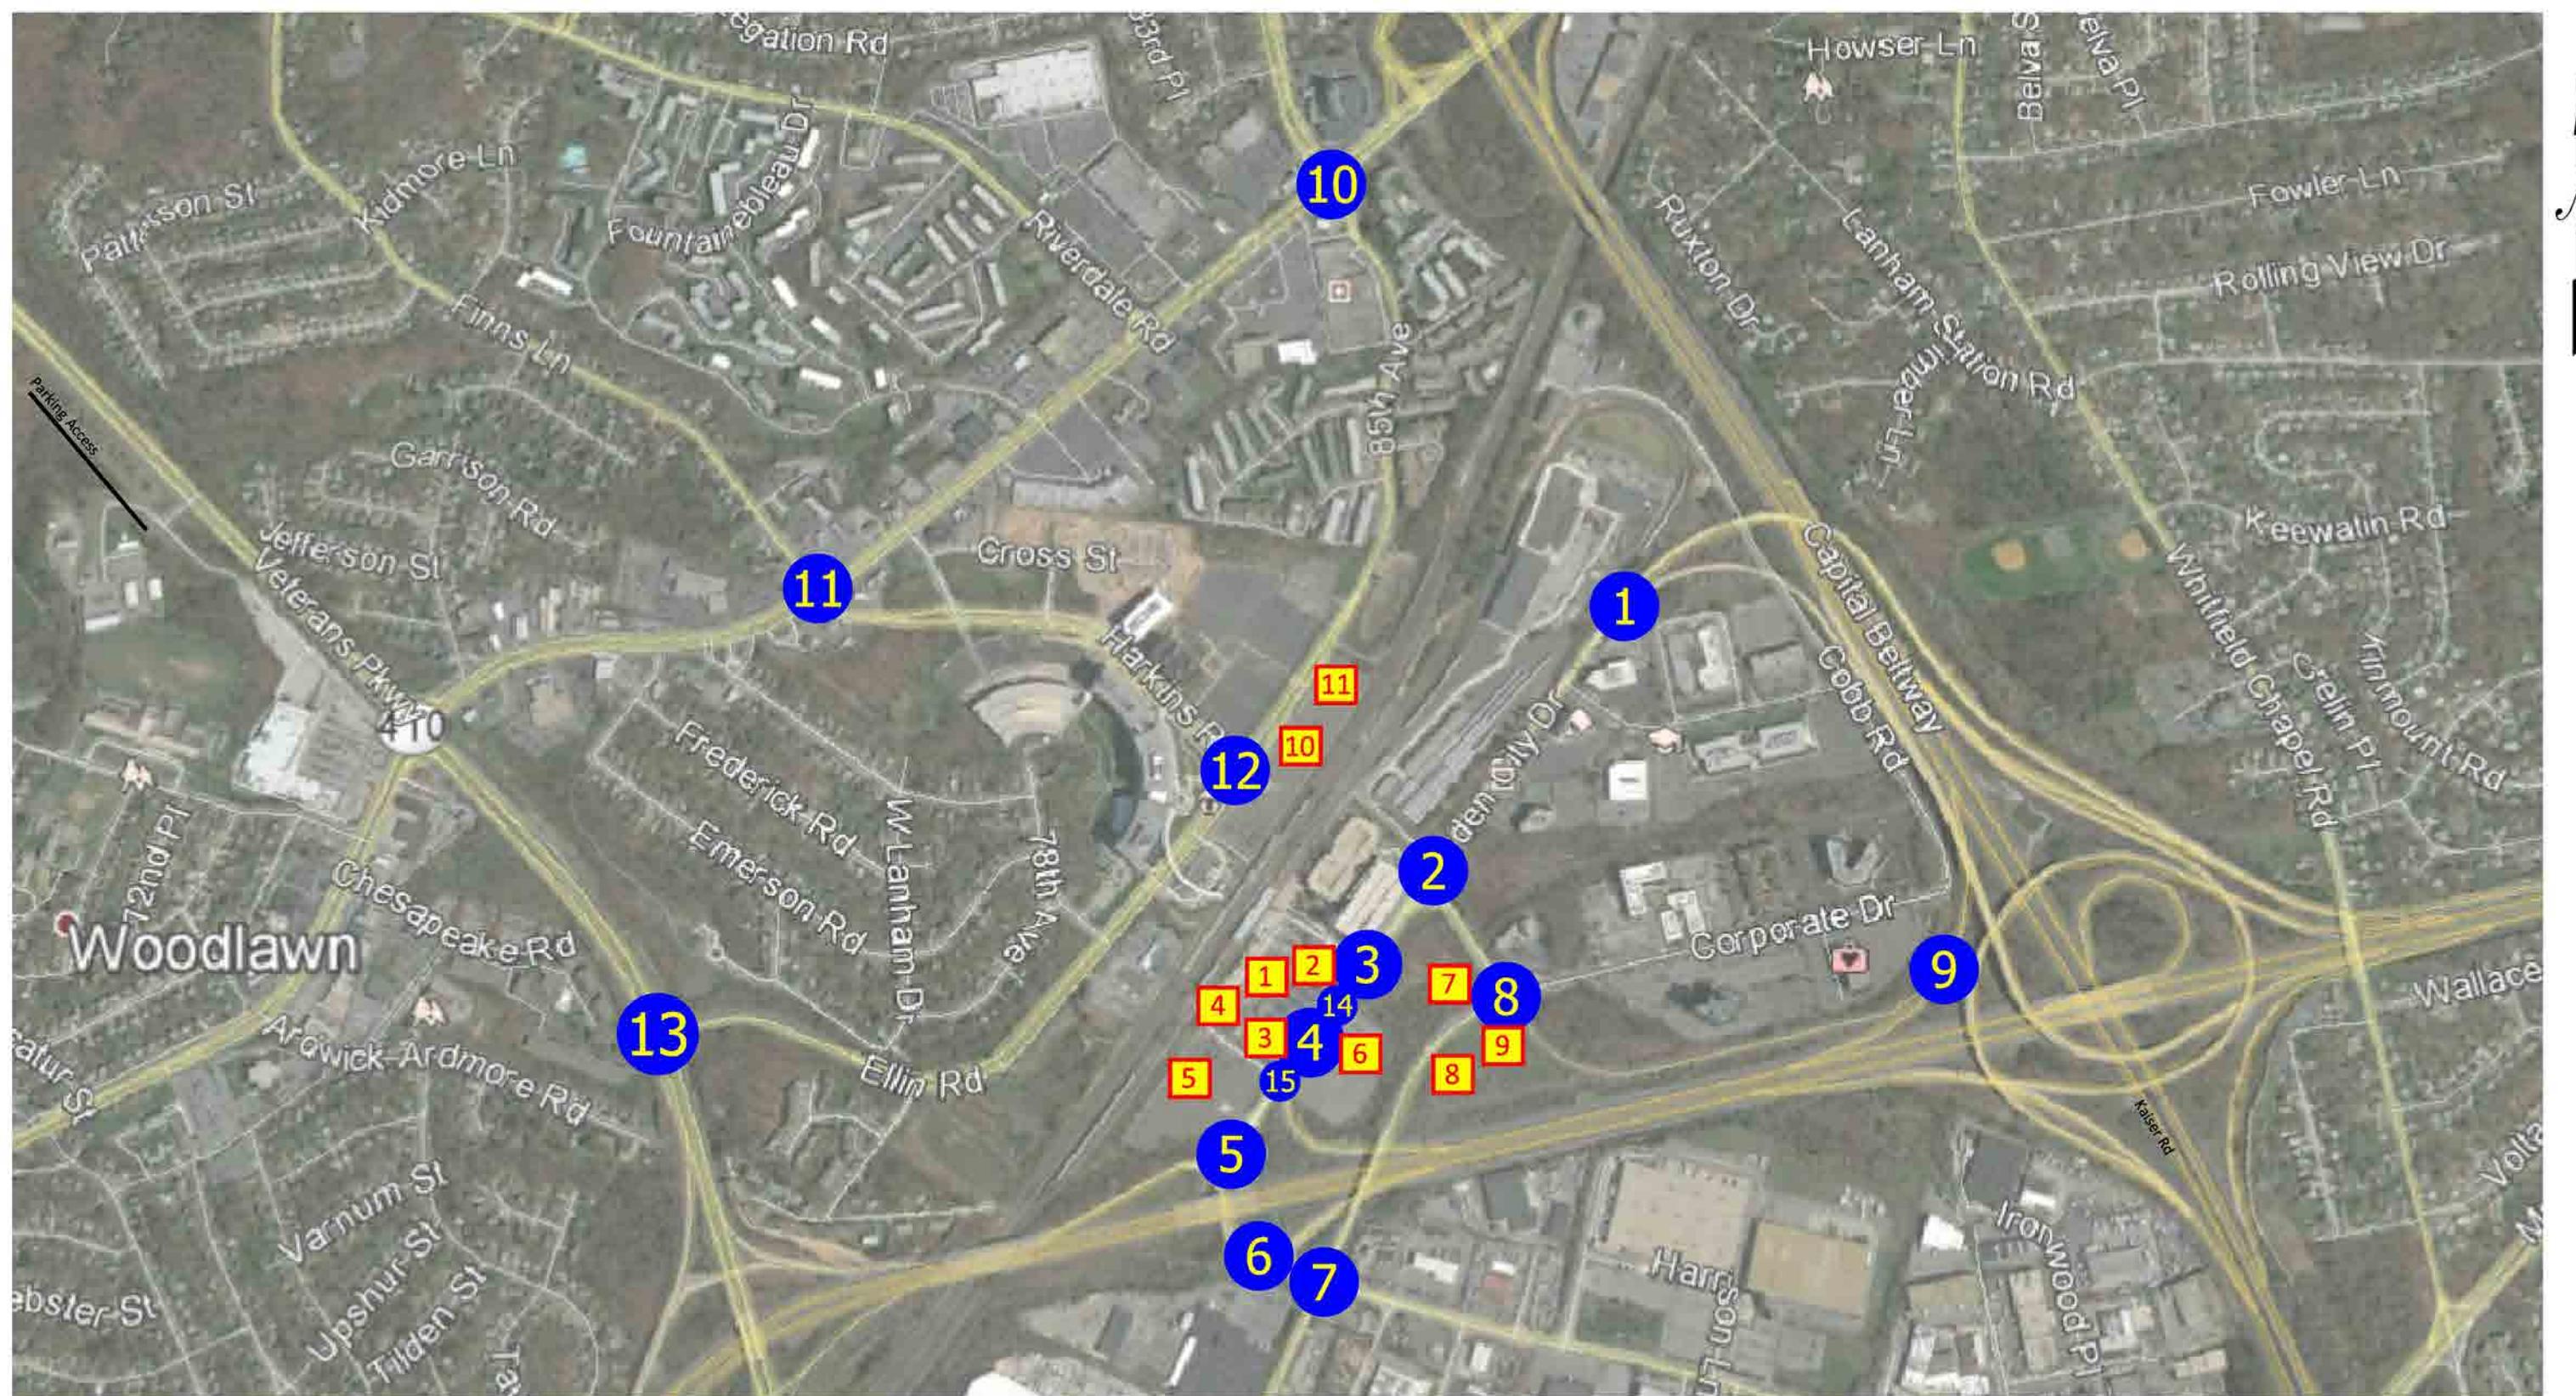

Building #
Study Intersection

EXHIBIT 1A
SITE LOCATION MAP

The original or working document was prepared by SOUTE, LLC (SOUTE). This document was not originated directly from SOUTE and is now heretofore deleted. SOUTE, LLC (SOUTE) makes no warranty, express or implied, concerning the accuracy of any information that has been transmitted by electronic means.

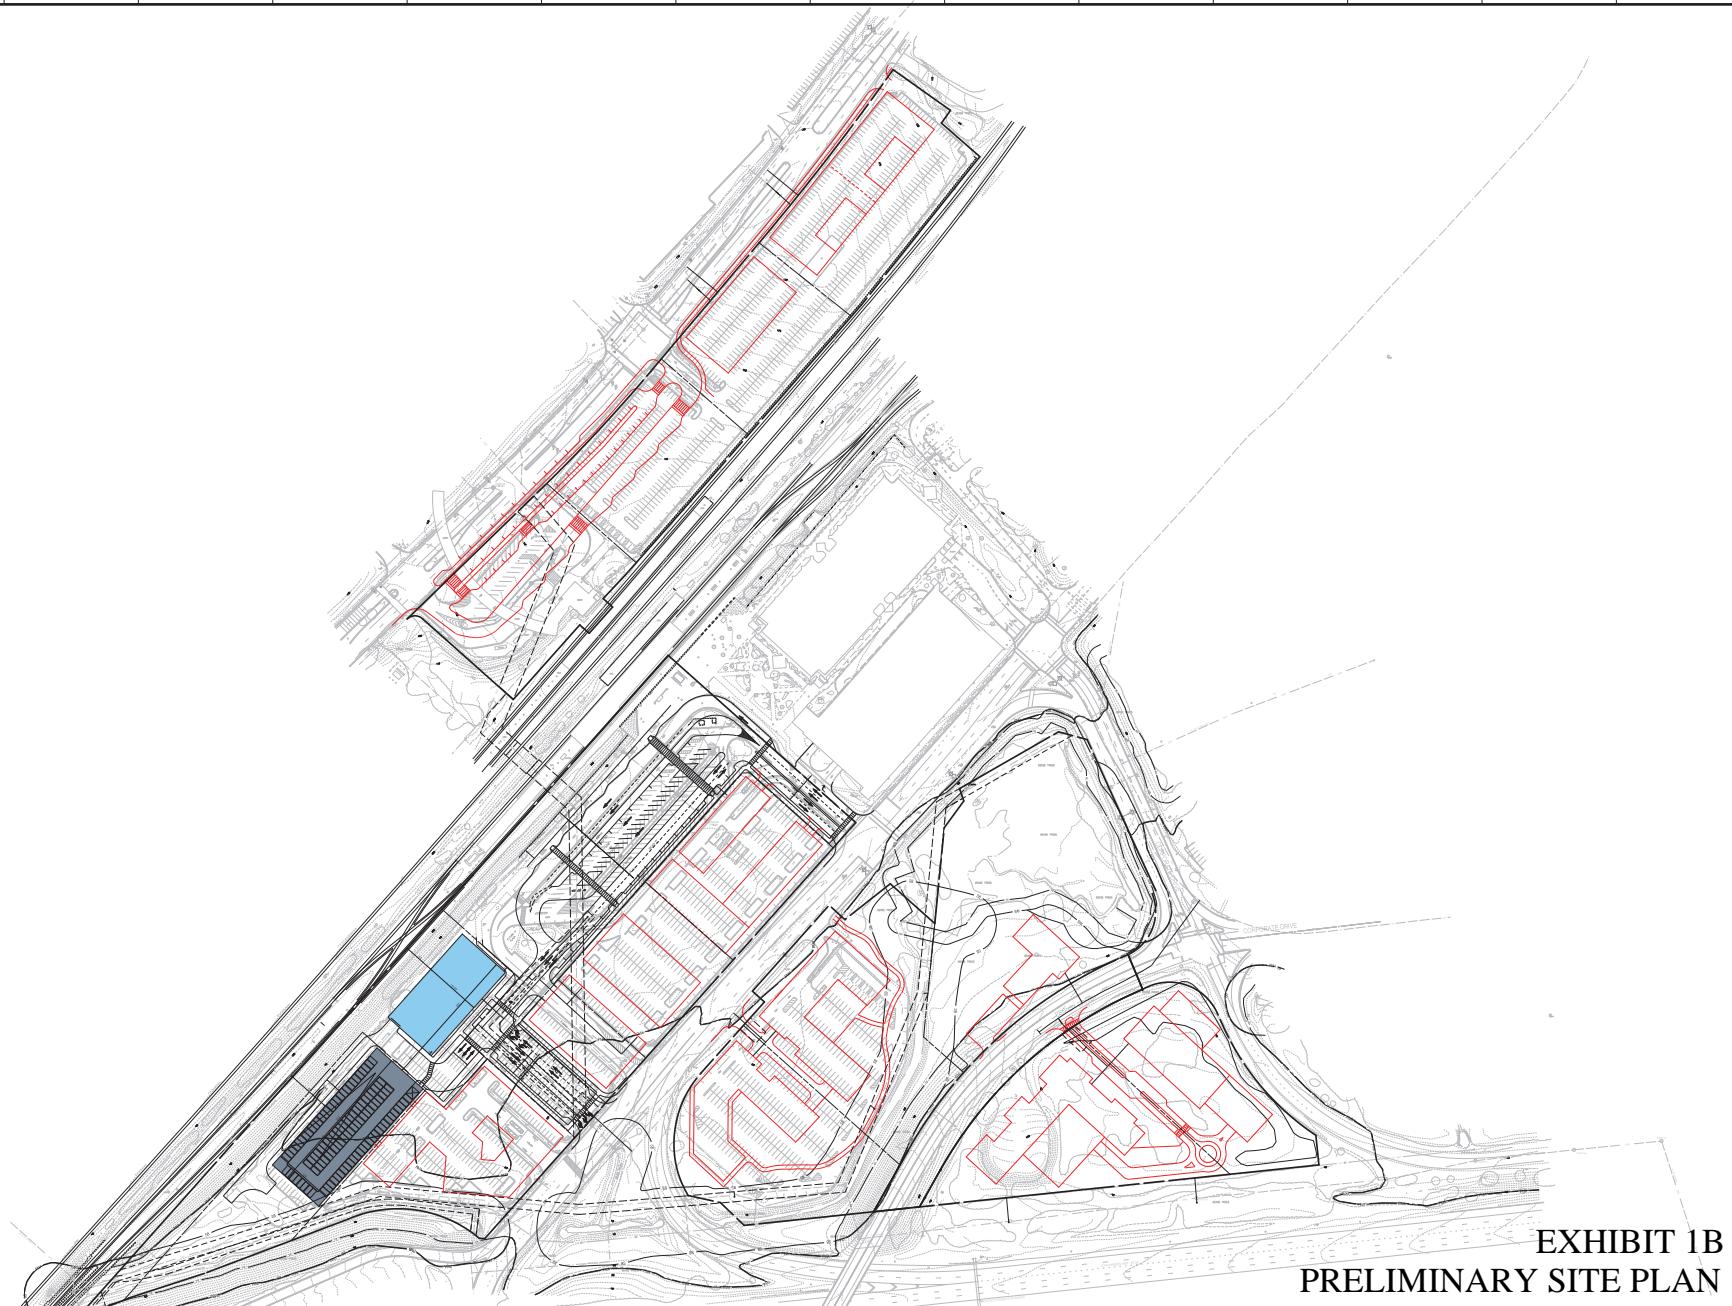


EXHIBIT 1B

EXISTING TRAFFIC CONDITIONS

Study Area


Exhibit 2 has been prepared to show the study area and each of the 15 intersections that have been included as part of this Traffic Impact Evaluation. Shown on Exhibit 2 is the existing lane use at each of these study area intersections as well as the existing traffic control that exists at each location.

Existing Traffic Volumes




Intersection Turning Movement Counts were conducted at all the study area intersections in May 2016 while schools were in session. The total vehicles observed during these counts are shown on the summary sheets contained in Appendix A to this report. The 2016 existing peak hour traffic volumes are shown on Exhibit 3.

Analysis of Existing Traffic Conditions

Intersection Capacity Analyses were conducted using the CLV Methodology for each of the study area intersections, and the results are shown on Exhibit 14. A review of Exhibit 14 indicates that all of the study area intersections are projected to operate at acceptable Levels of Service "C" or better under the existing traffic conditions. Copies of the capacity worksheets are contained in Appendix B.

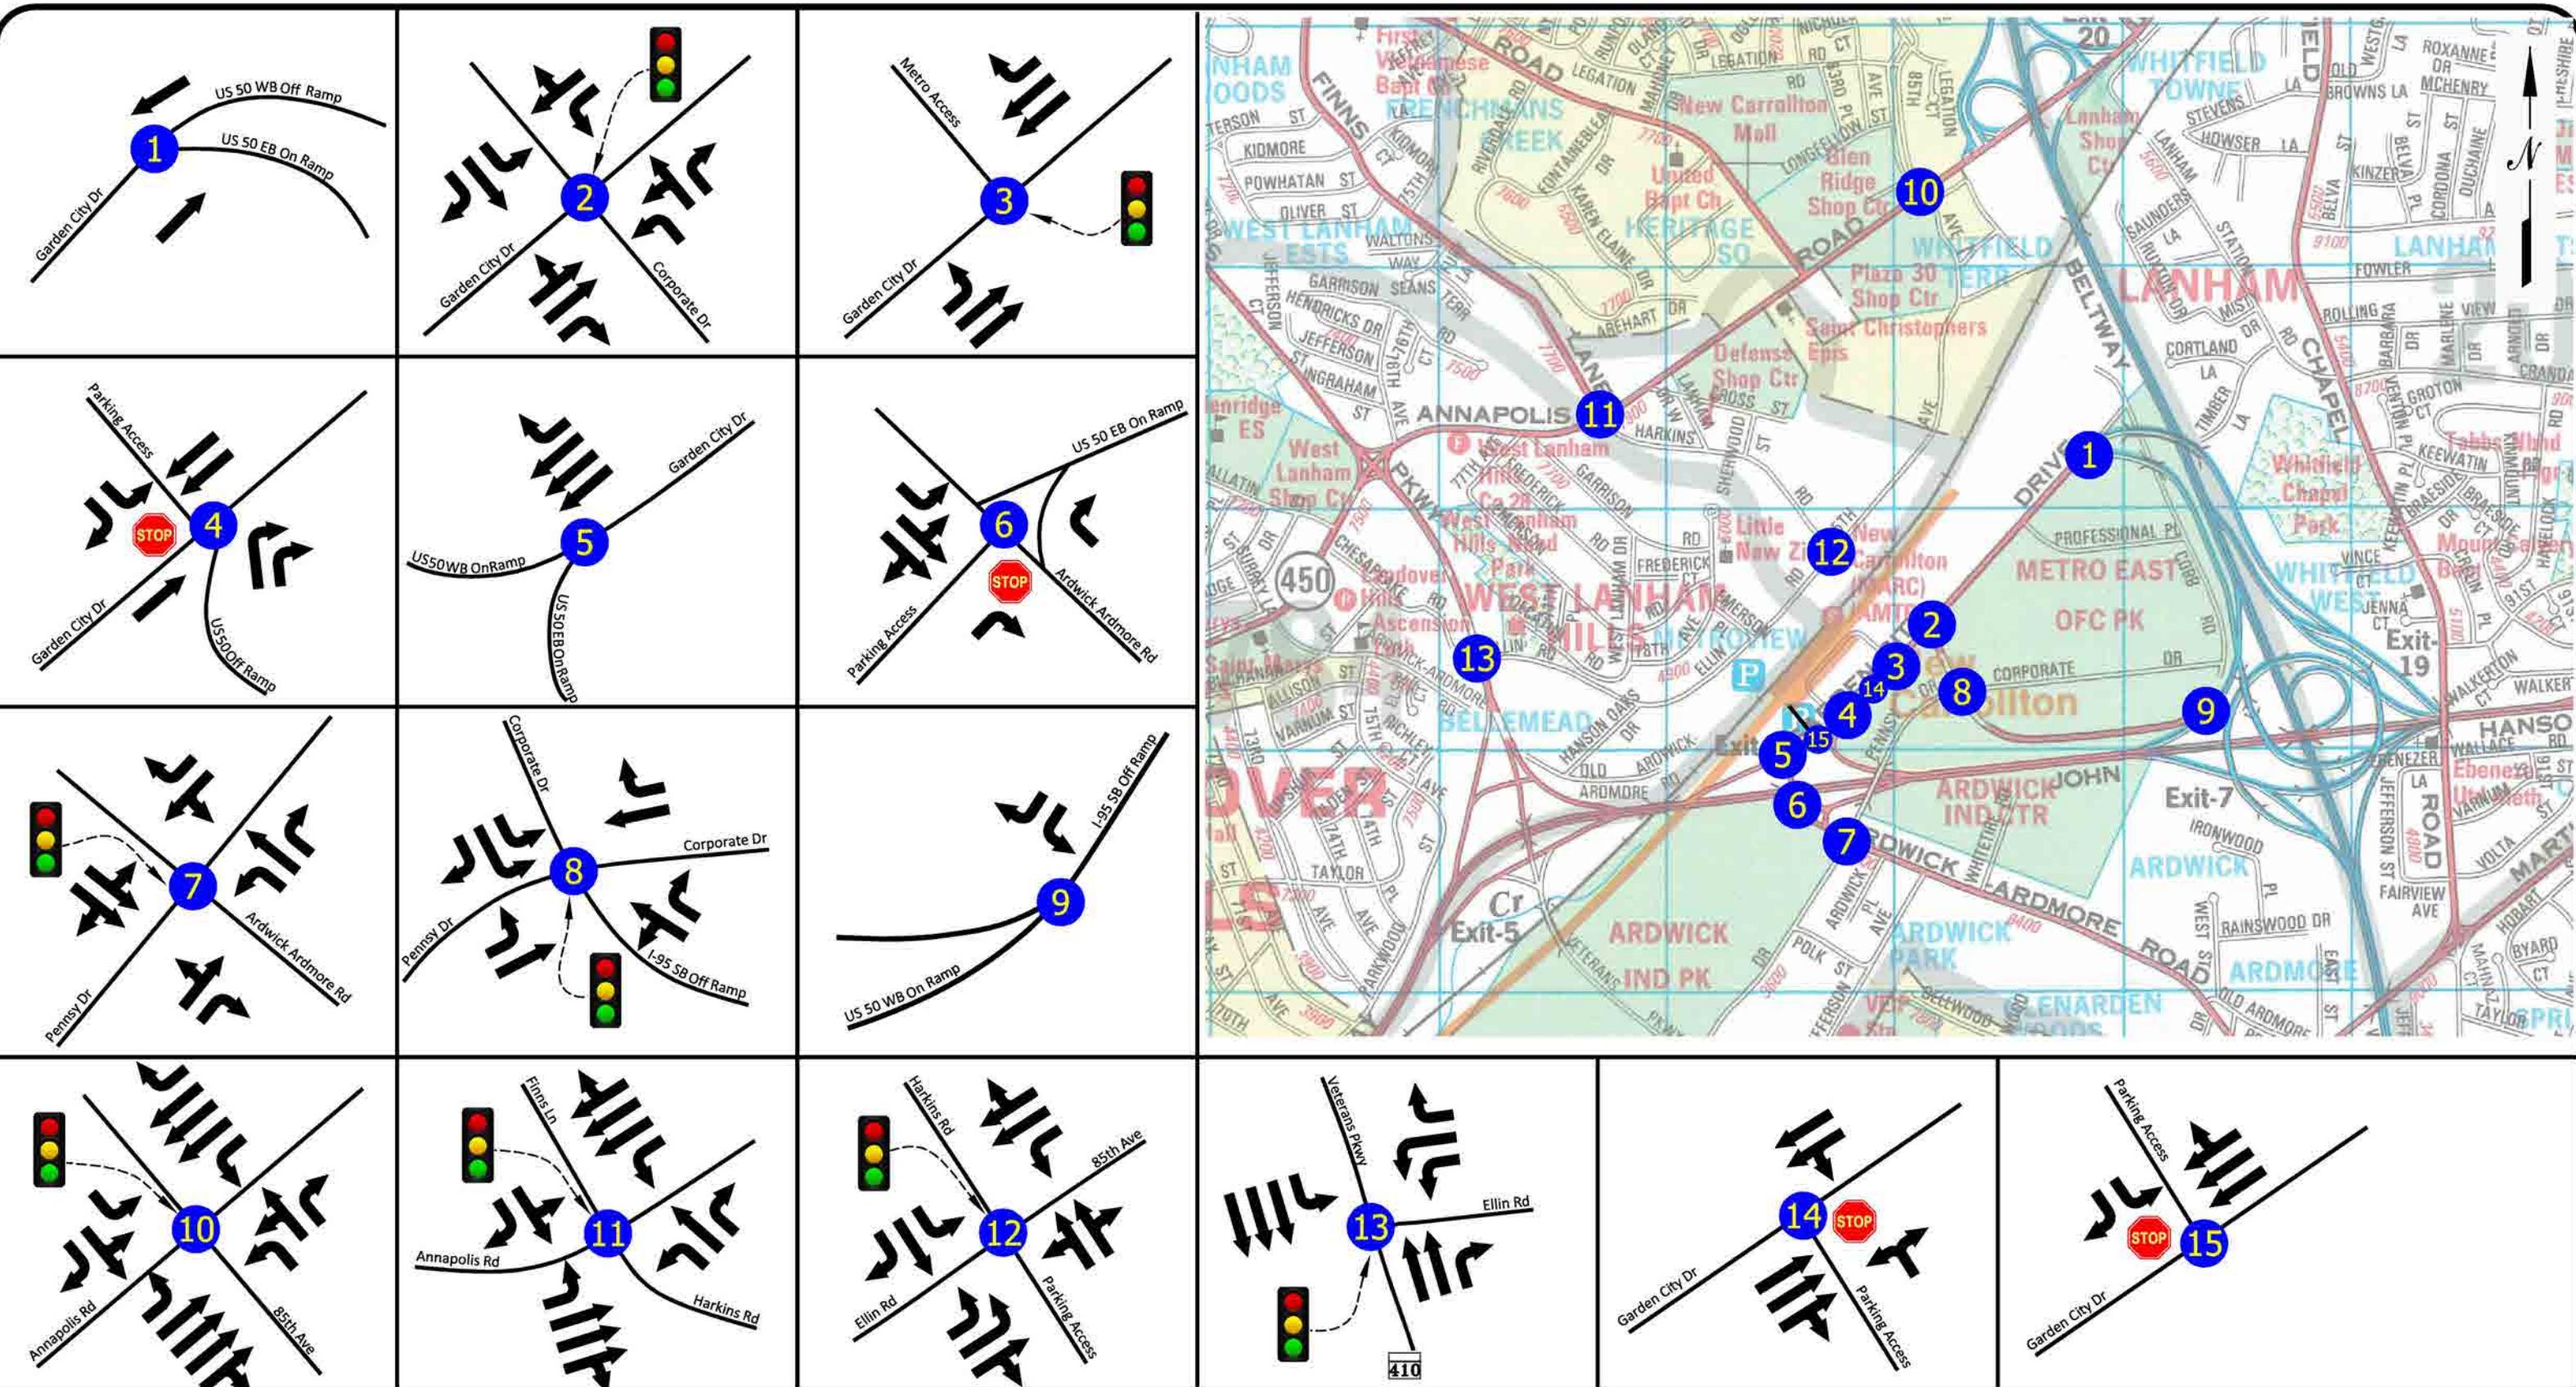

NOT TO SCALE

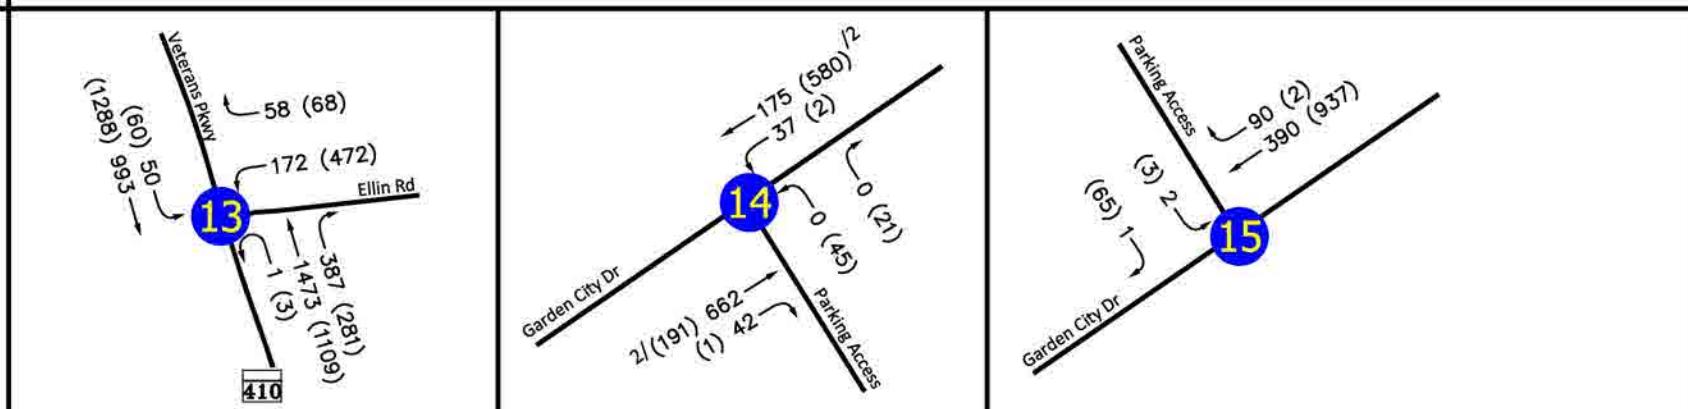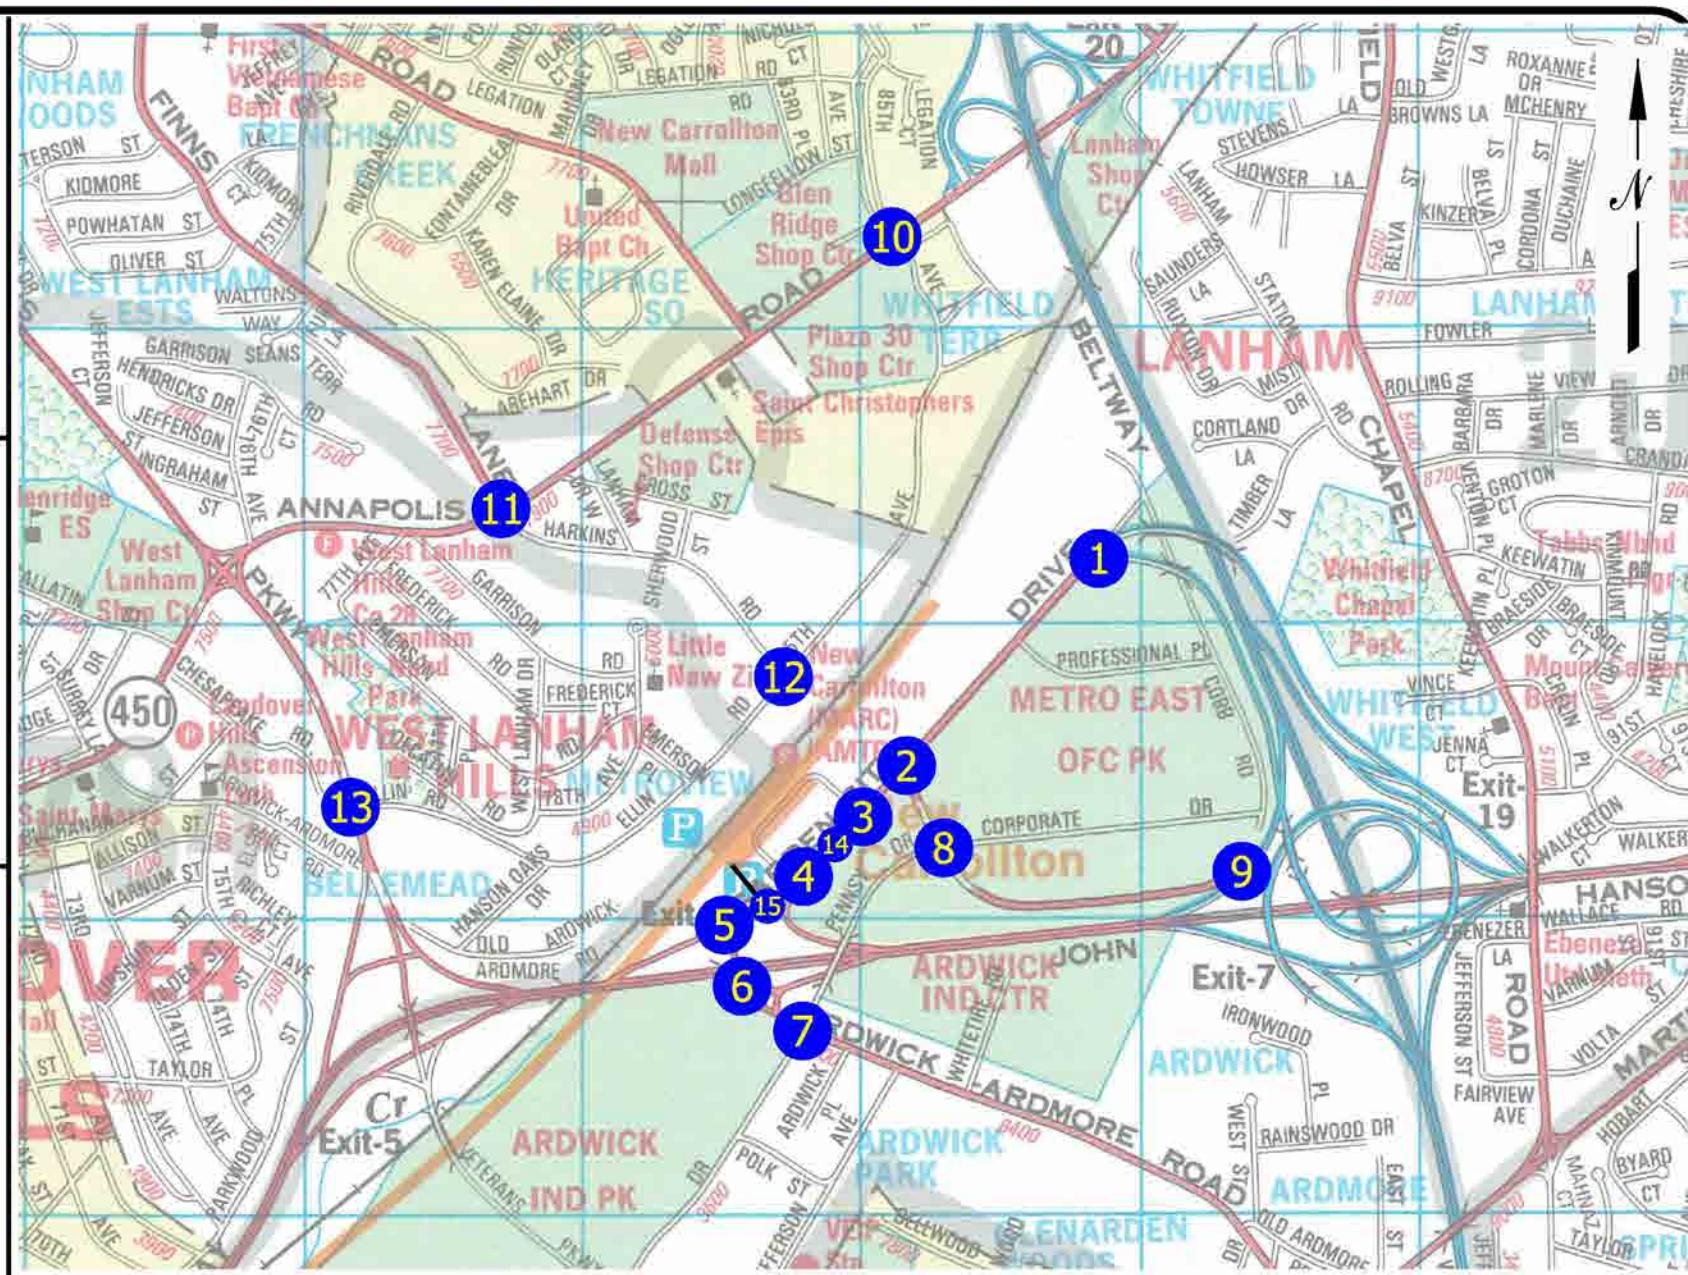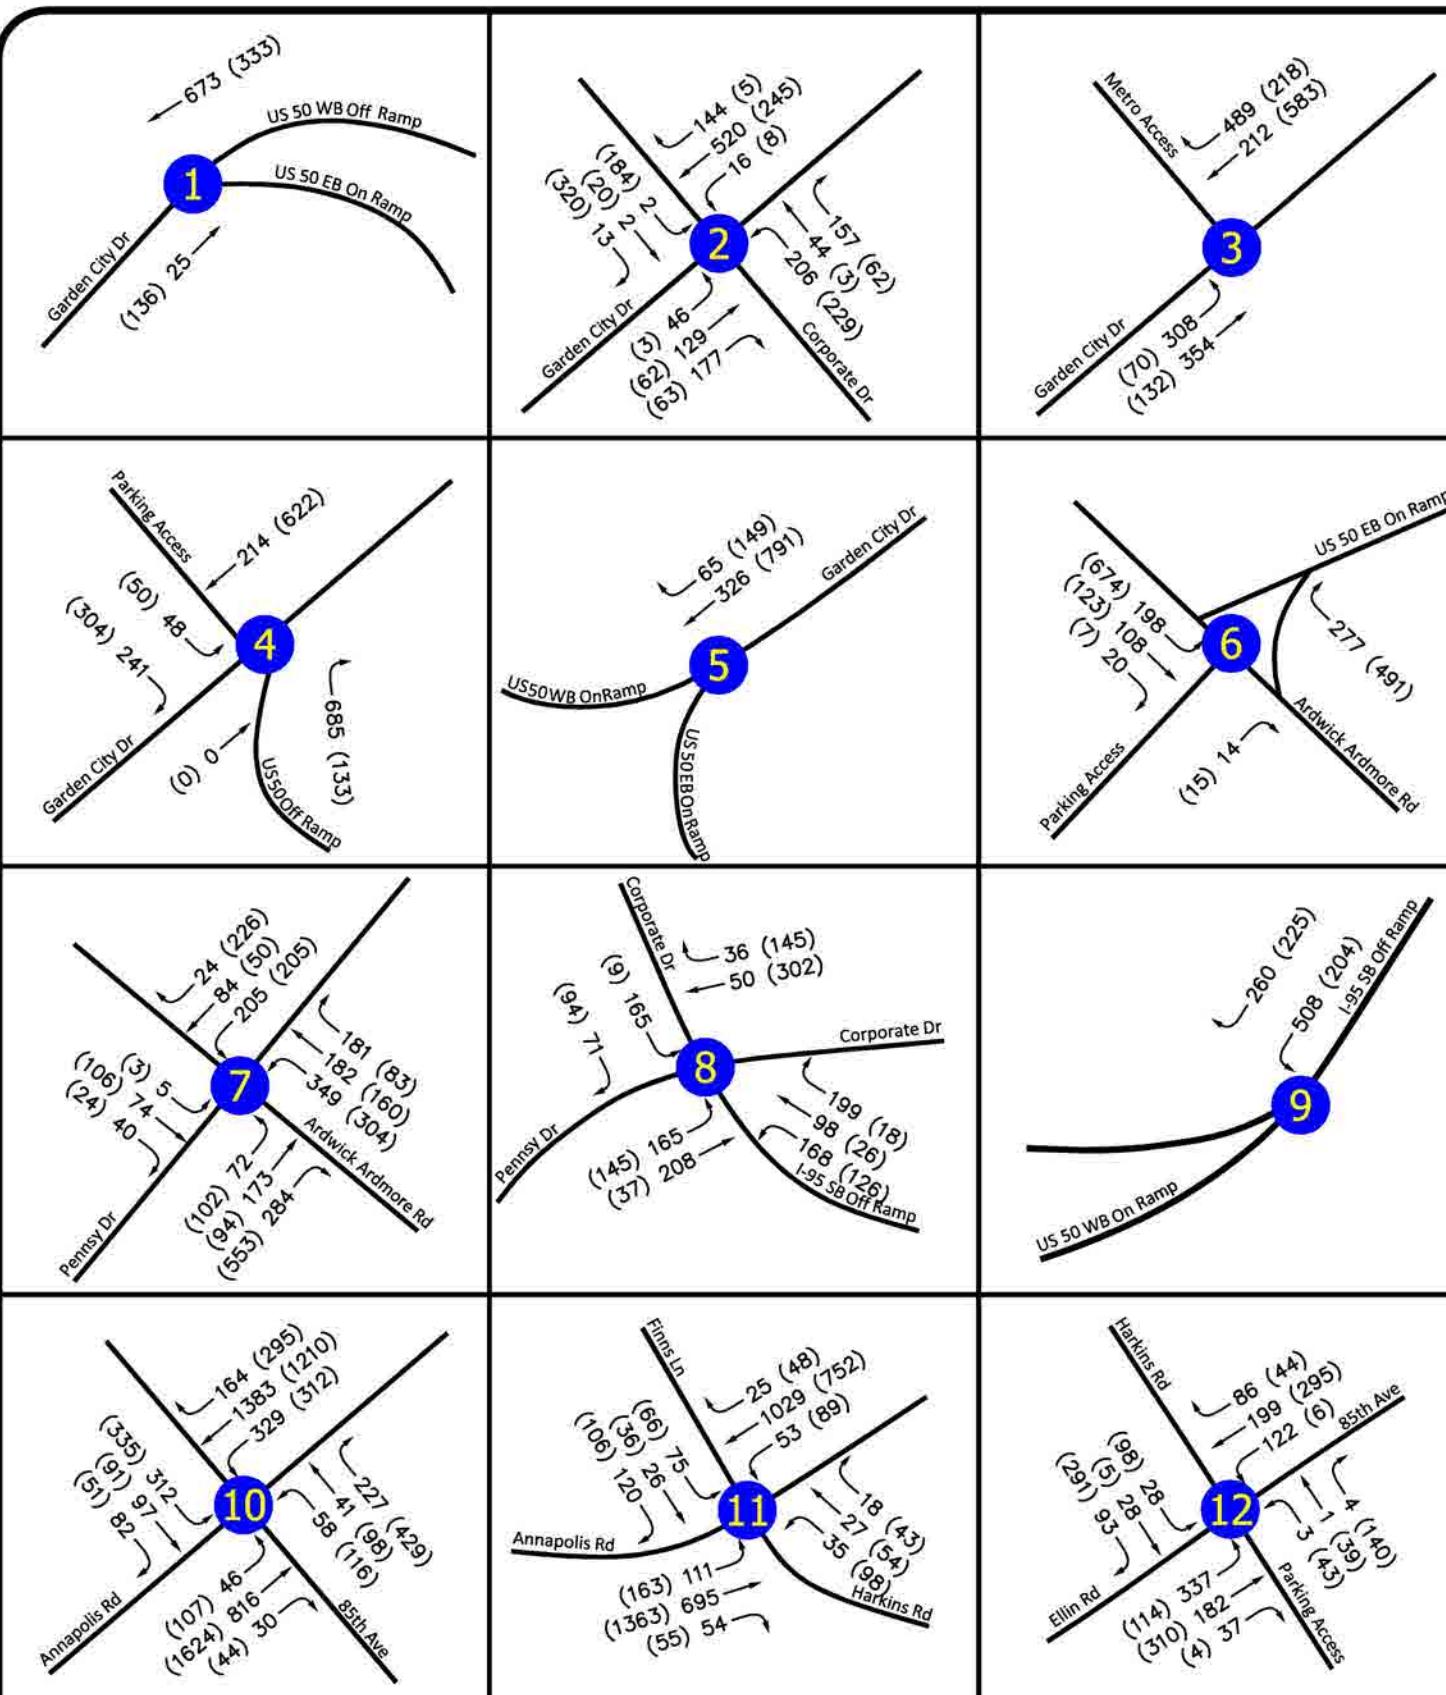

NOT TO SCALE

00 - MORNING PEAK HOUR
(00) - EVENING PEAK HOUR

Note:

- Note:

 1. All intersections may not have the same peak hour.
 2. Thru Traffic volume along Garden City Drive derived from Intersection #3

EXHIBIT 3

2016 EXISTING PEAK HOUR TRAFFIC VOLUMES

BACKGROUND TRAFFIC CONDITIONS

Design Year 2026

For the purposes of this report, it has been assumed that the proposed development planned for the subject site will occur over a ten-year period. In order to determine the base traffic conditions in the Year 2026, we have increased the existing peak hour volumes determined by the turning movement counts to reflect a .5% growth per year for a 10-year period. The incremental increase associated with this growth is shown on Exhibit 4.

The incremental growth over the next 10 years was combined with the existing peak hour traffic volumes resulting in the 2026 base peak hour volumes shown on Exhibit 5.

Nearby Approved Developments

In addition to regional growth, traffic projected to be generated by other approved developments planned in the vicinity of the subject site was also included in our analysis and the formation of the background traffic conditions.

Based on information obtained from other studies for the Garden City Project, as well as, the proposed development planned on the north side of the New Carrollton Station, we have prepared Exhibit 6 which shows the location of these two planned developments in this area.


Exhibit 7 was prepared to show the approved trip generation rates and total trips projected to be generated by each of these developments which were previously used in the earlier studies. The peak hour trips projected to be generated by these other nearby developments were then distributed and assigned to the adjacent road system as shown on the exhibits contained in Appendix C to this report. The combined peak hour trips generated by these developments are reflected on Exhibit 8.

Combining the trips to be generated by the other approved developments and the 2026 base peak hour volumes results in the 2026 background peak hour volumes shown on Exhibit 9A.



Analysis of Background Traffic Conditions

Intersection Capacity Analyses were conducted for the background peak hour traffic conditions, and the results are shown on Exhibit 14. Copies of the Capacity Worksheets are contained in Appendix B to this report.

A review of Exhibit 14 indicated that all of the study area intersections are projected to operate at an acceptable level of service “C” or better during both of the peak periods.

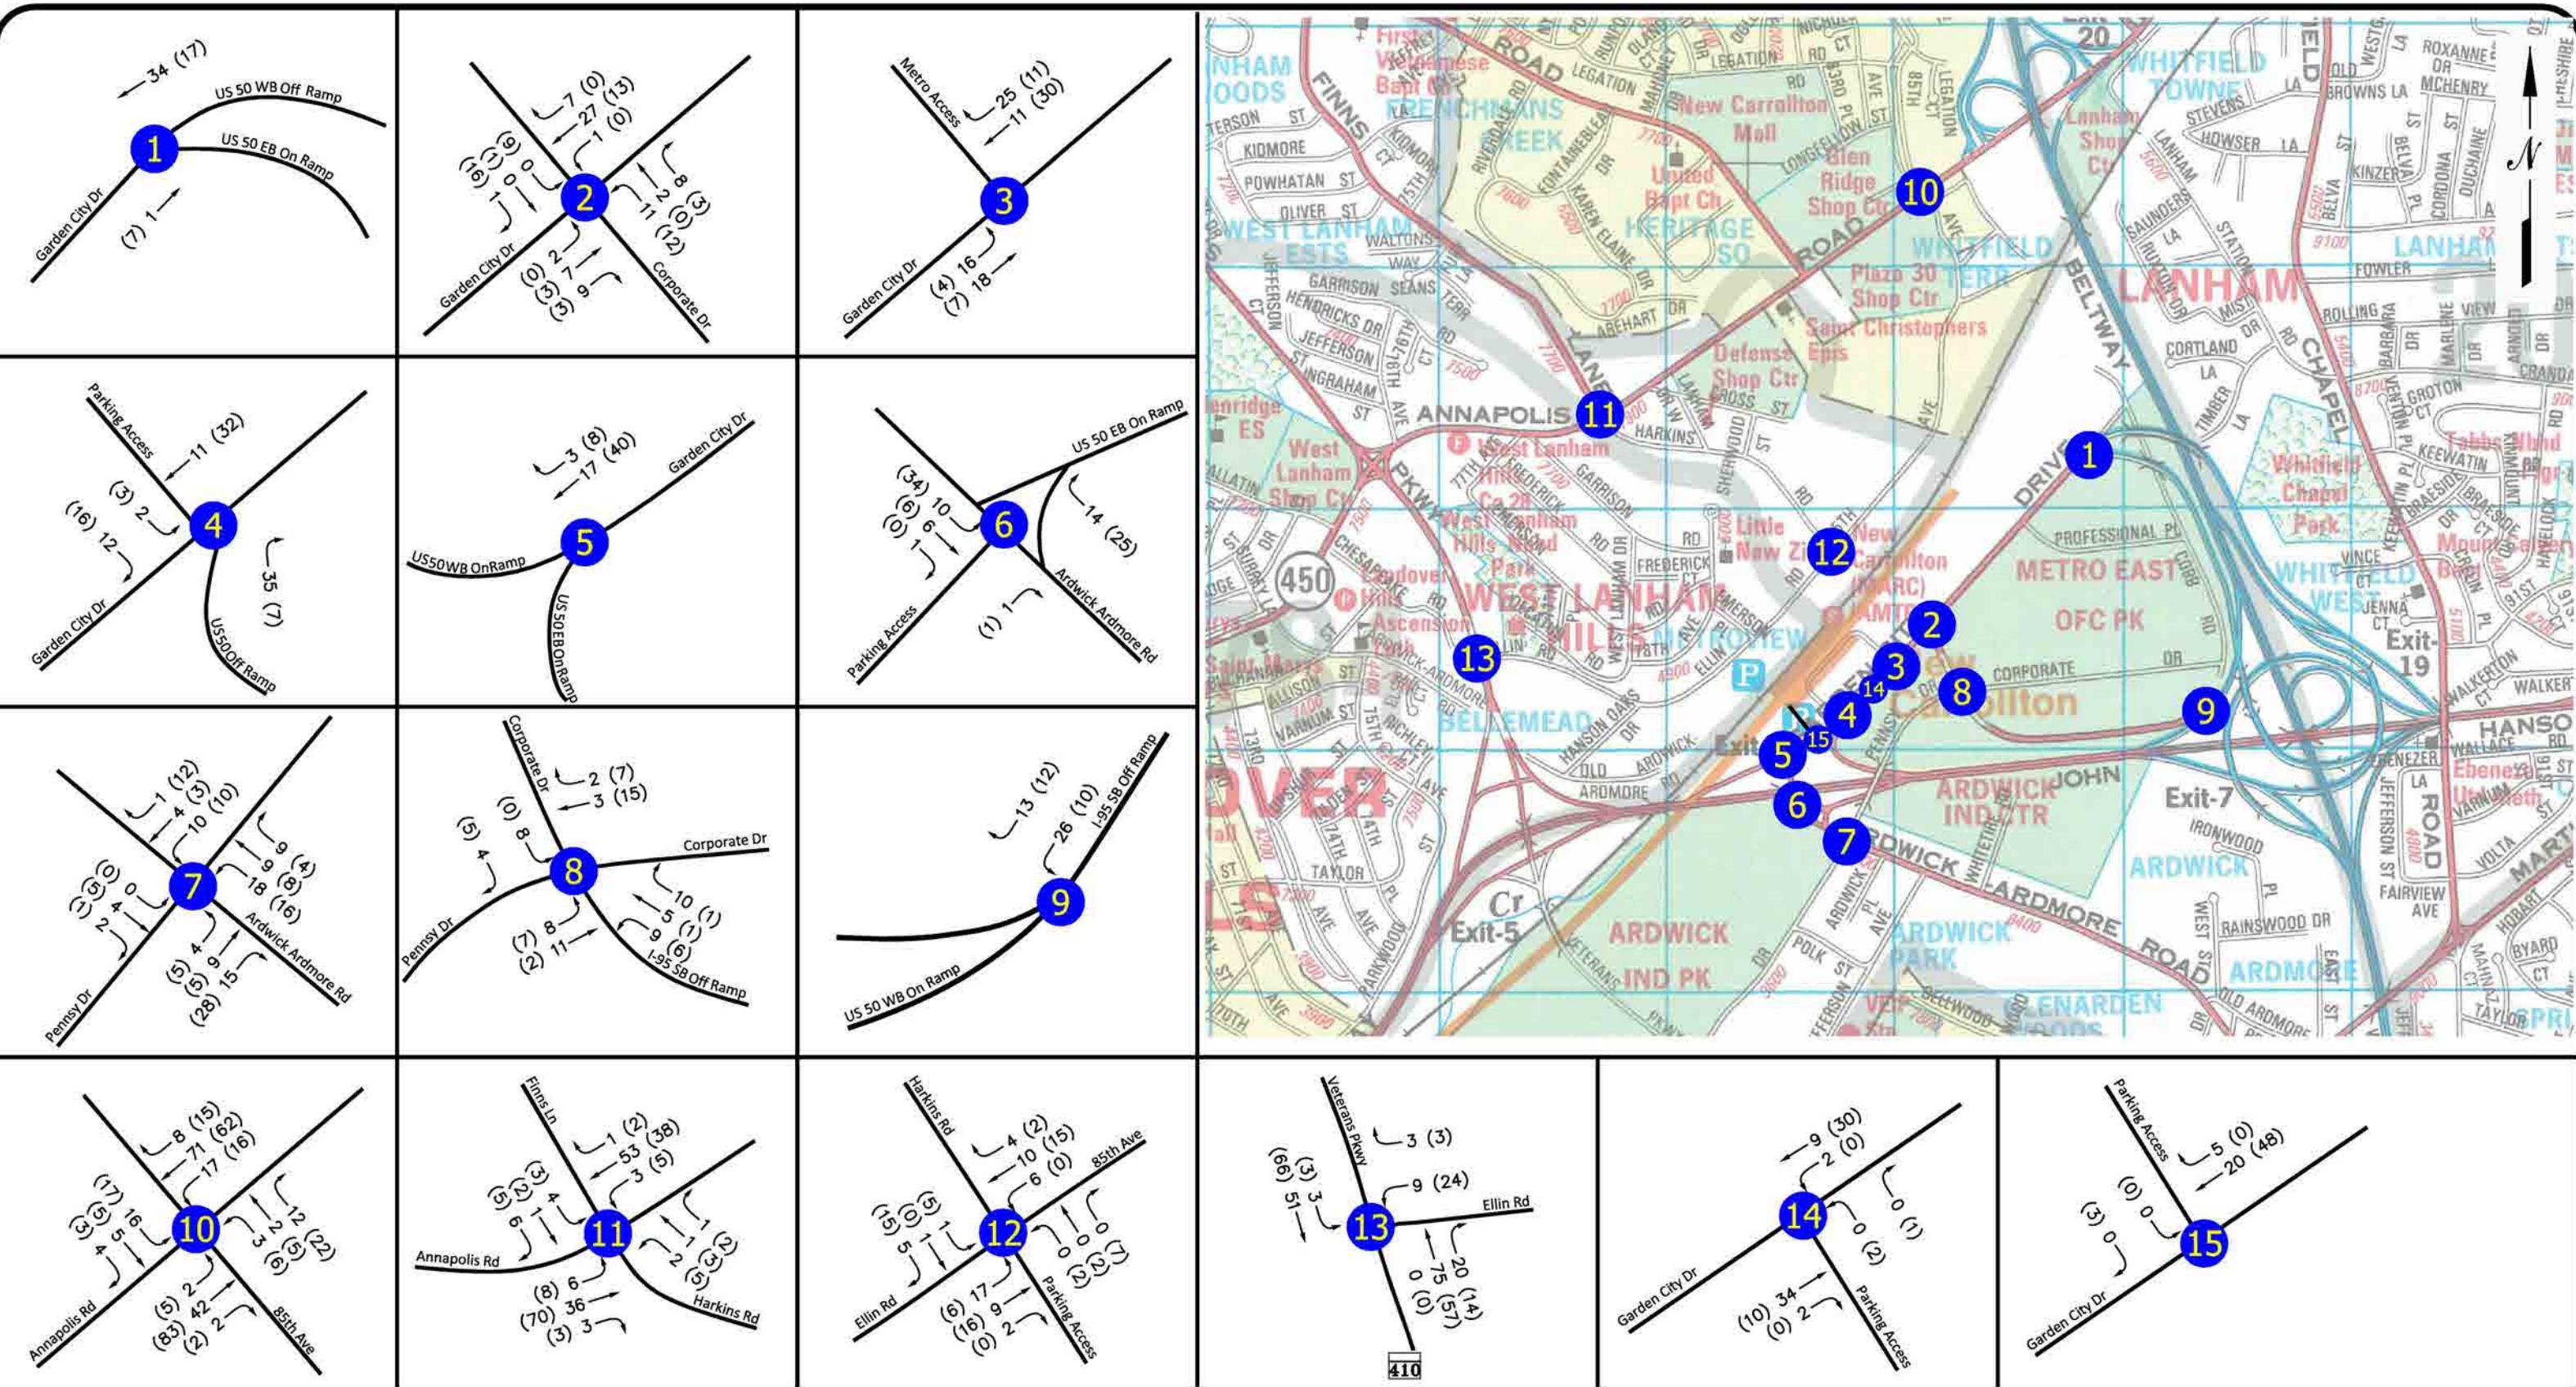

NOT TO SCALE
00 - MORNING PEAK HOUR
(00) - EVENING PEAK HOUR

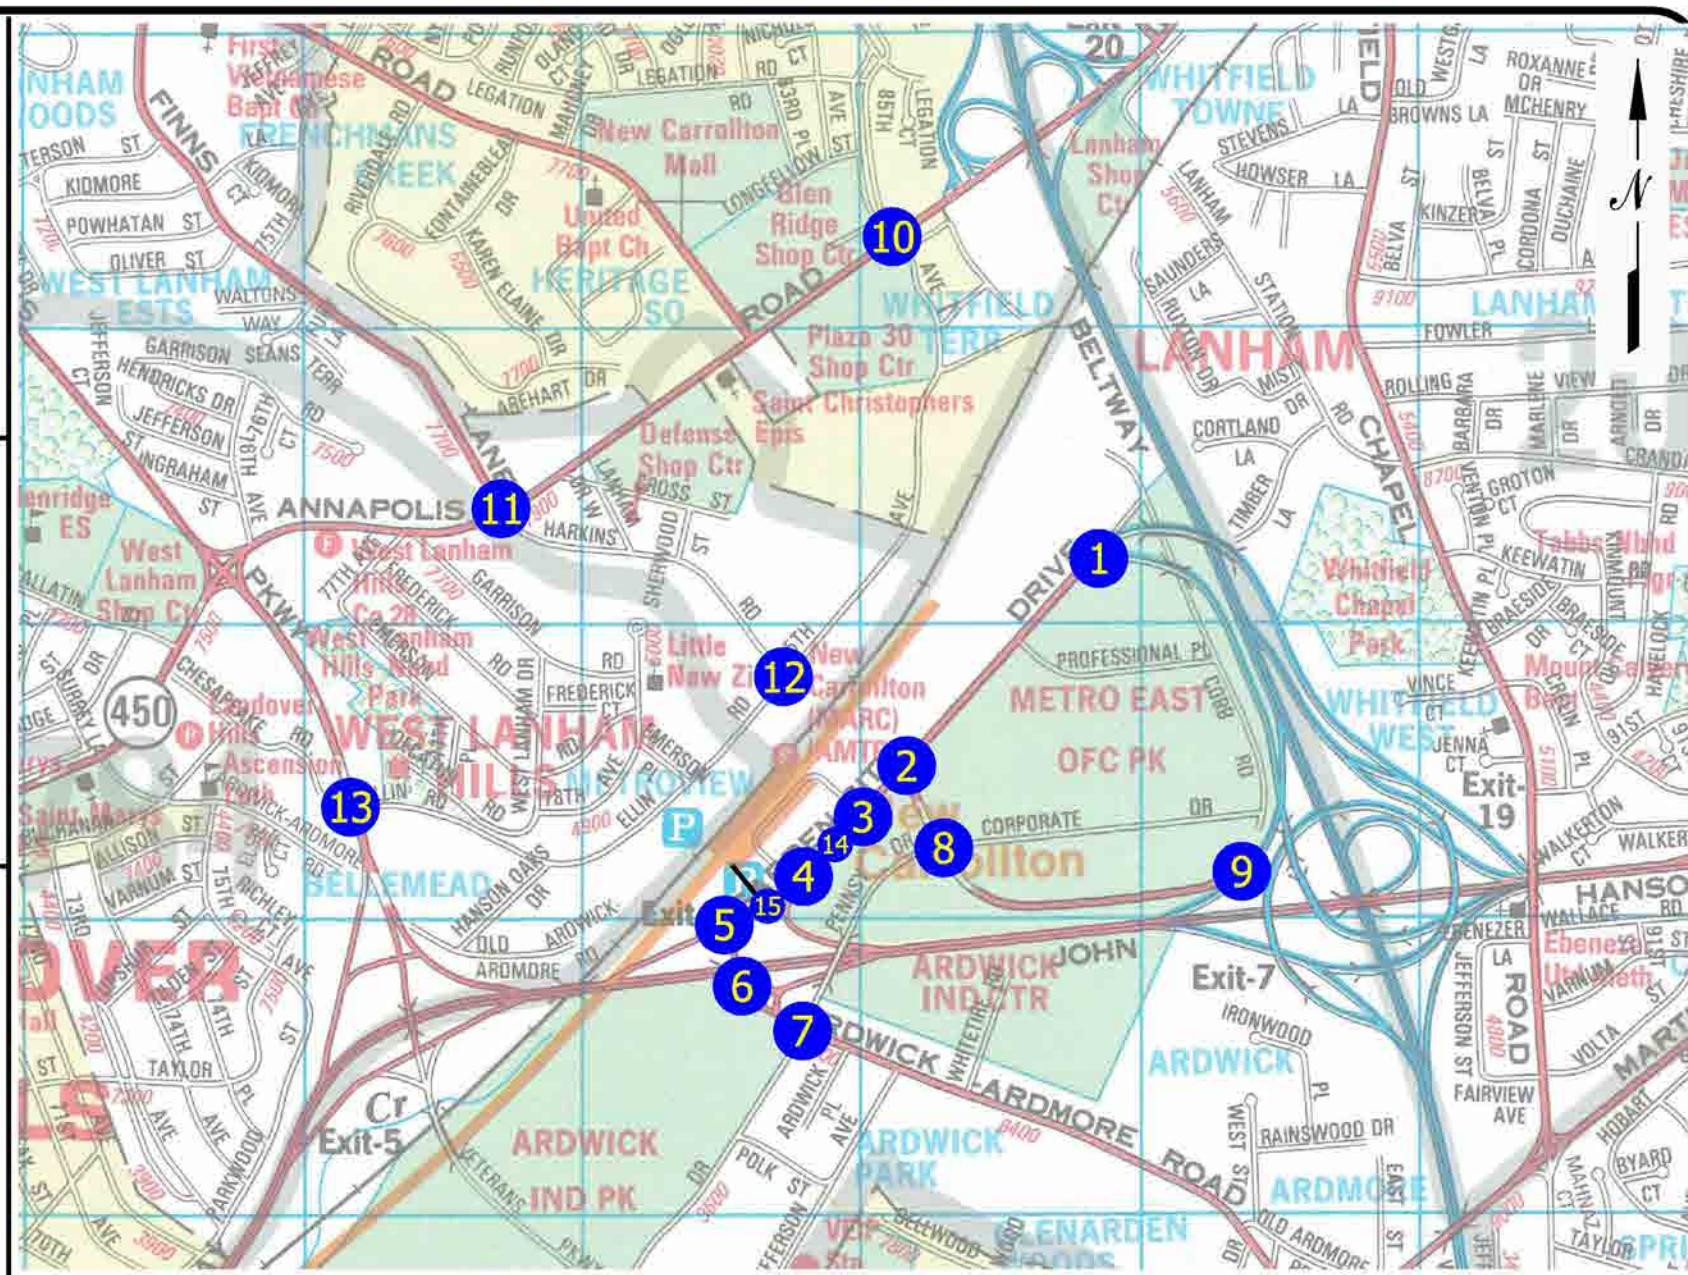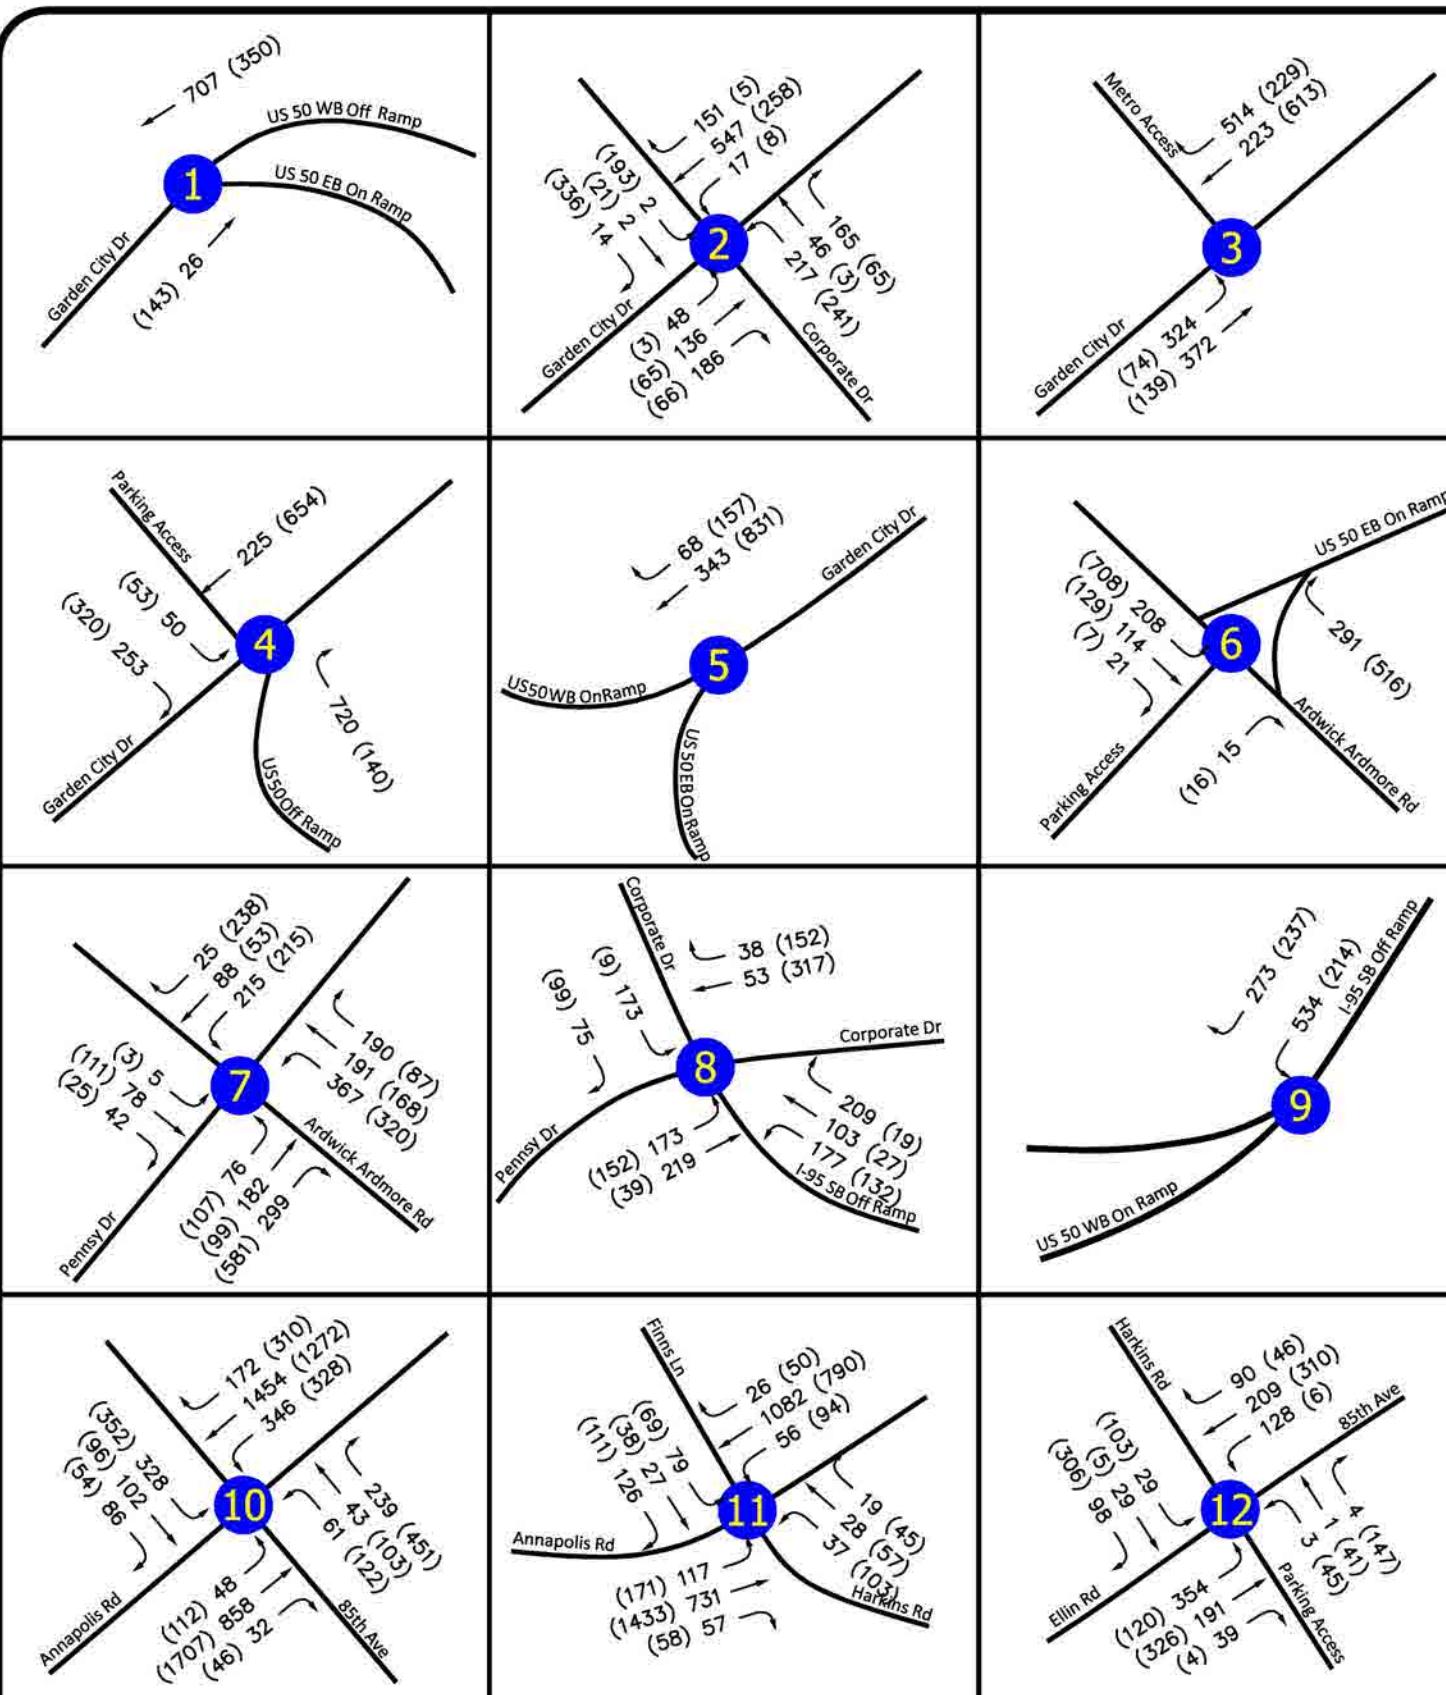

NOT TO SCALE
00 - MORNING PEAK HOUR
(00) - EVENING PEAK HOUR

EXHIBIT 5

2026 BASE PEAK HOUR TRAFFIC VOLUMES

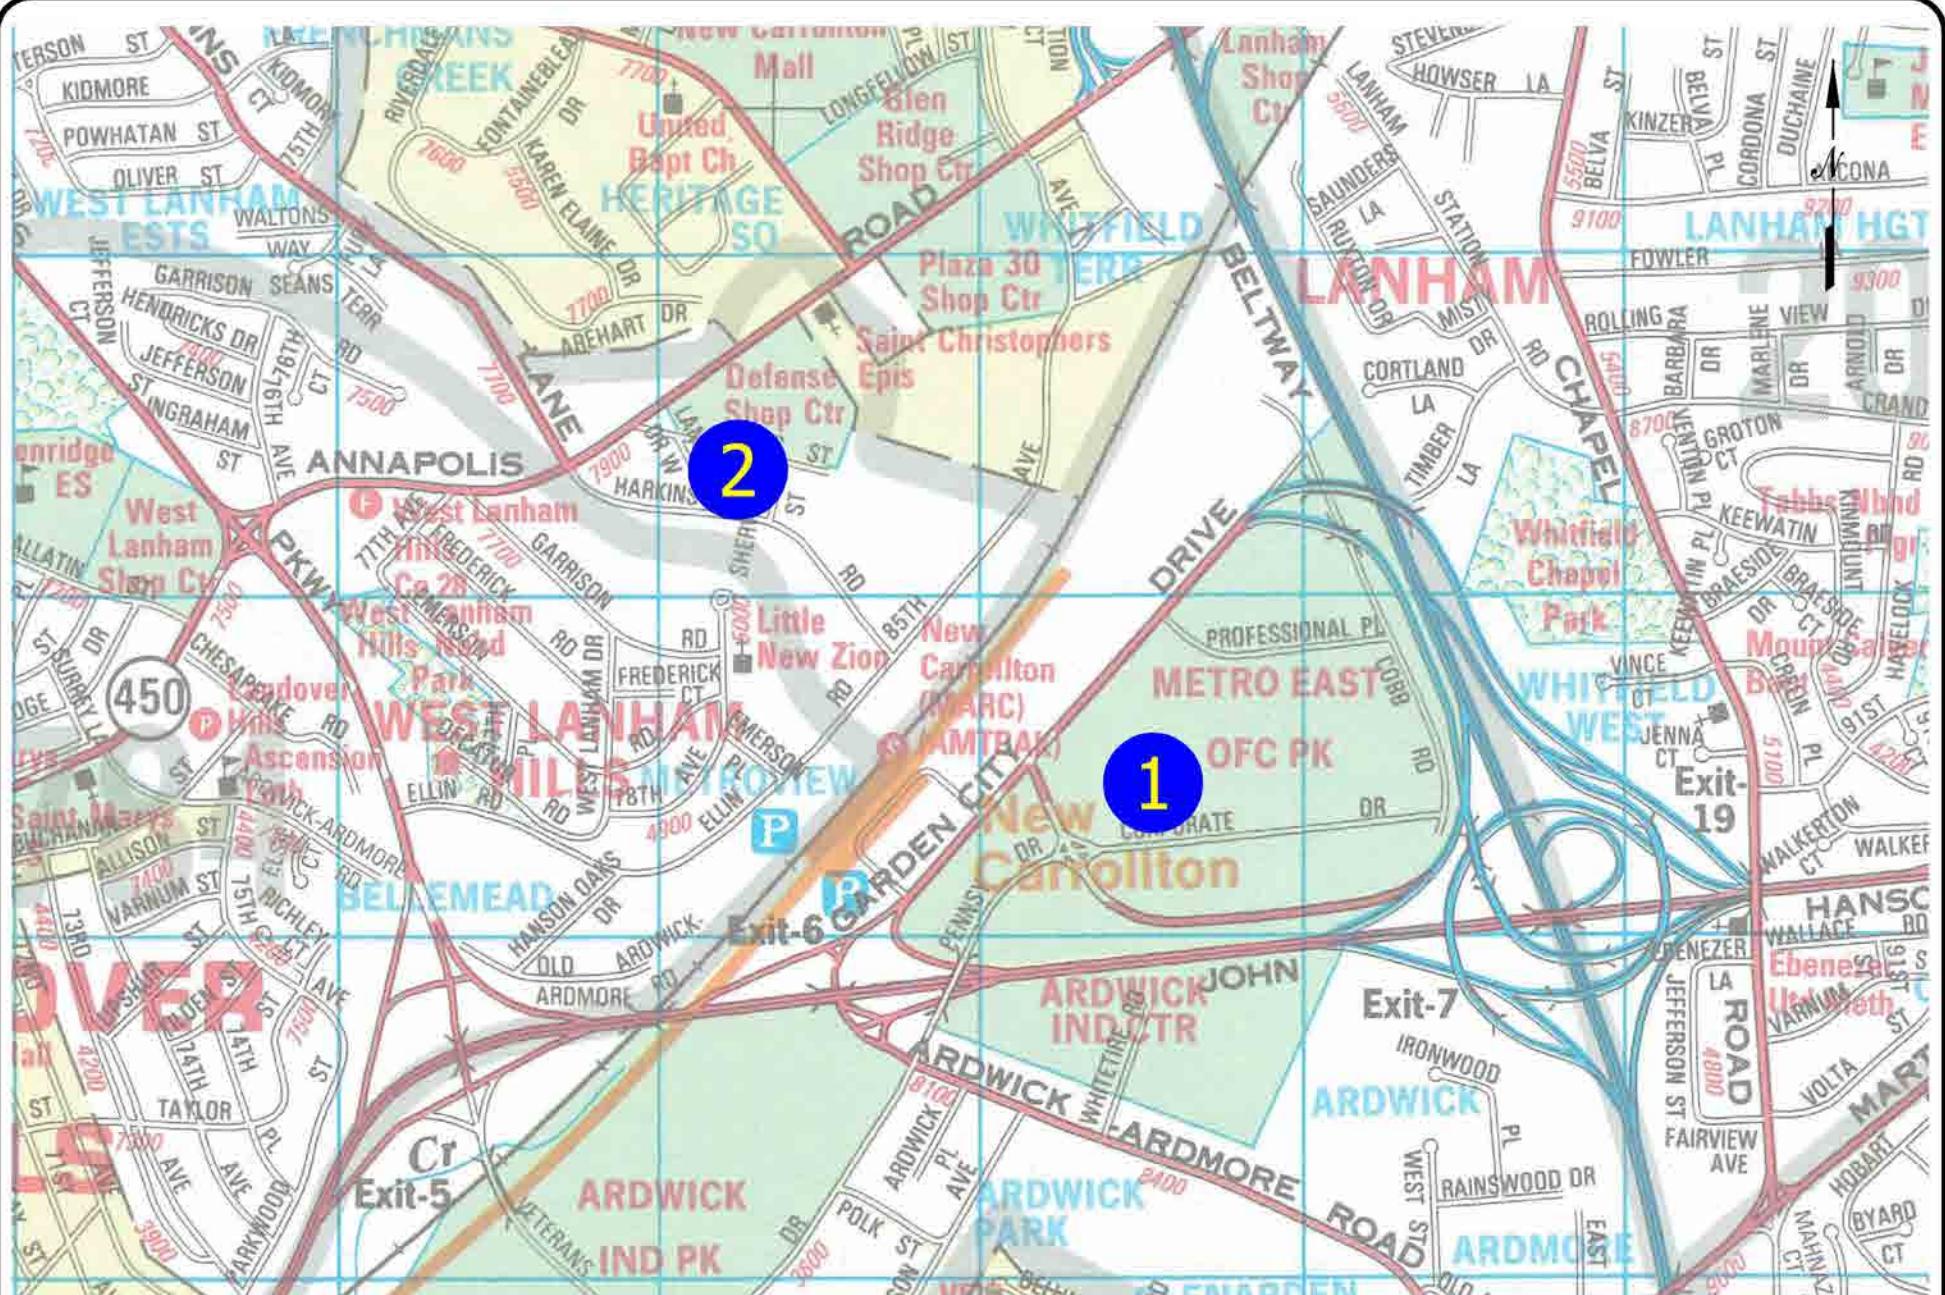


EXHIBIT 6
LOCATION MAP FOR
APPROVED DEVELOPMENTS

Background development number
corresponding to trip generation table.

Trip Generation Rates

Formula/Rate	Directional Distribution			
	AM Peak Hour IN	OUT	PM Peak Hour IN	OUT
Apartment (Gardenand Mid-Rise, Prince Georges County Rate)				
Morning Trips = 0.52 x Units		20%	80%	65% 35%
Evening Trips = 0.60 x Units				
General Office (Prince Georges County Rate)				
Morning Trips = 2.0 x ksf		90%	10%	19% 81%
Evening Trips = 1.85 x ksf				


Trip Generation

No.	Land Use	Size	AM Peak Hour			PM Peak Hour		
			In	Out	Total	In	Out	Total
1. Garden City (Obtained from New Carrollton TIA dated Sep, 2014.								
			350	660	1010	350	350	700
2. Carrollton Station, North Side								
General Office	200,000	sq.ft.	360	40	400	333	37	370
Internal Trips			-5	0	-5	-5	-6	-11
Non-Auto Modes			-64	-7	-71	-12	-53	-65
Off-Site Office Trips			291	33	324	316	-22	294
Apartments	556	Units	58	231	289	217	117	334
Internal Trips			0	-5	-5	-6	-5	-11
Non-Auto Modes			-27	-106	-133	-99	-53	-152
Off-Site Apartment Trips			31	120	151	112	59	171

Note:

1. Internal Trips based on NCHRP Report 684 Findings.
2. Non-Auto modes found in Appendix D (for 1/4 to 1/2 miles) of New Carrollton TIA dated Sep, 2014.




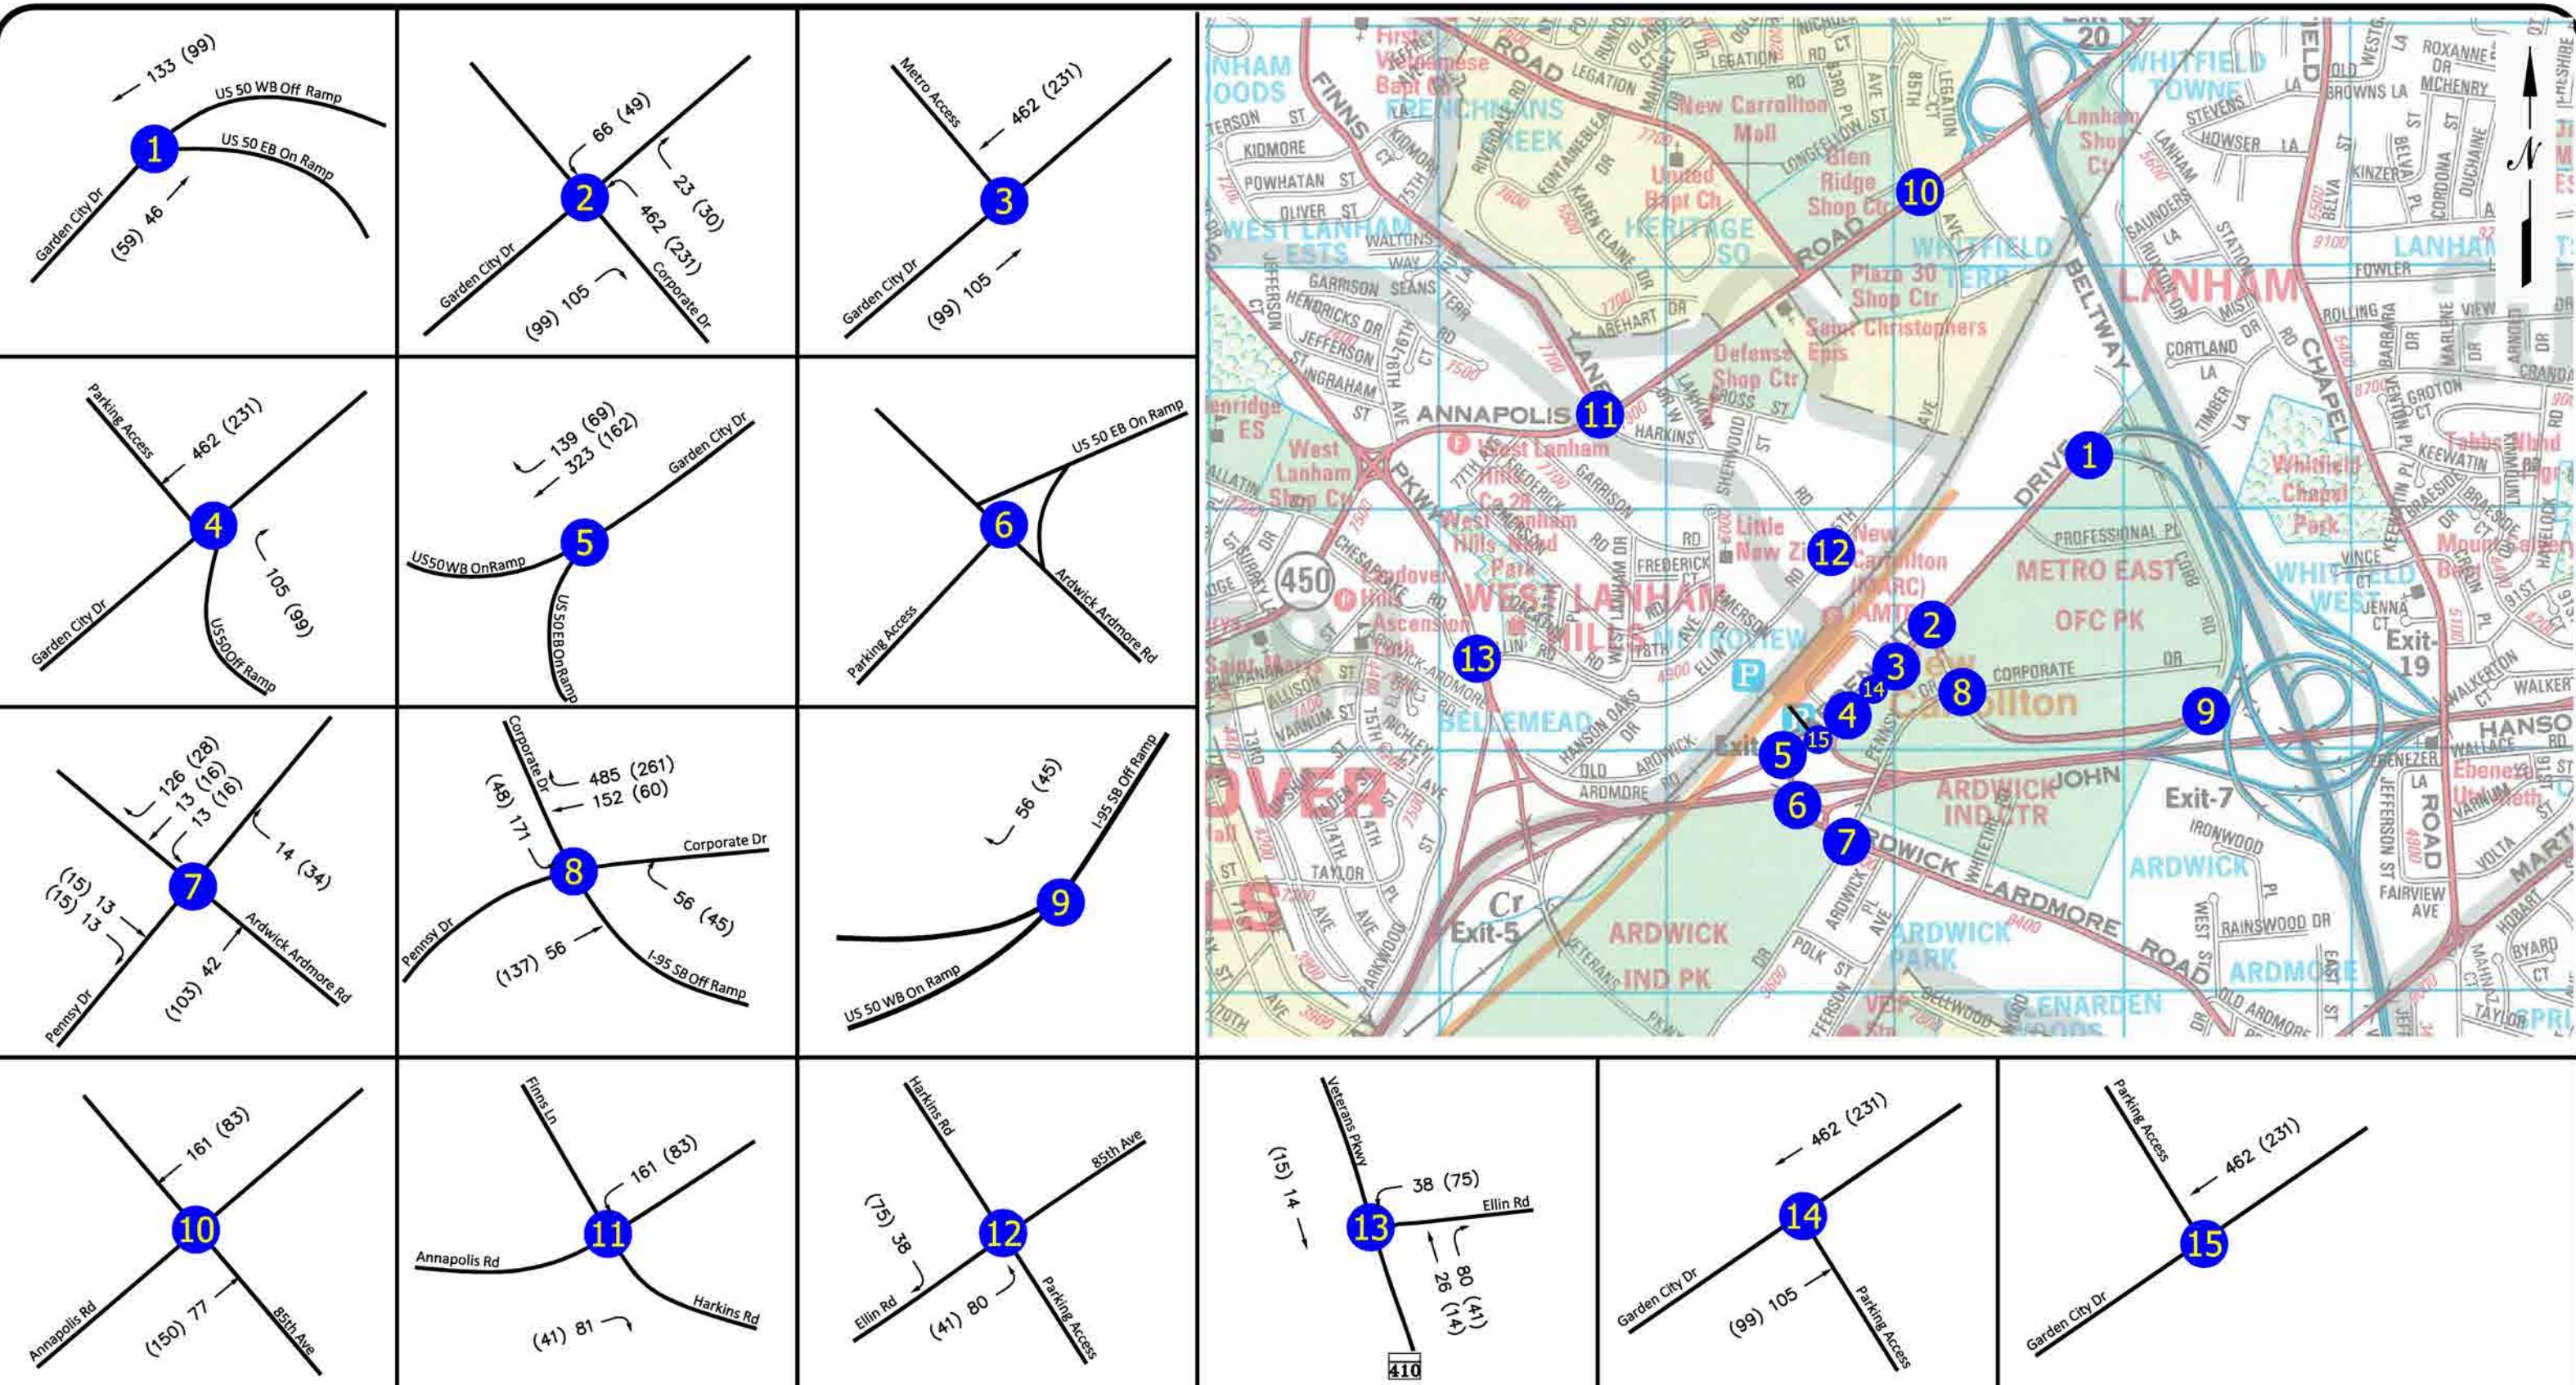

NOT TO SCALE
00 - MORNING PEAK HOUR
(00) - EVENING PEAK HOUR

Note:
Trip assignment details refer to Appendix C.

EXHIBIT 8
COMBINED TRIPS GENERATED
BY APPROVED DEVELOPMENTS

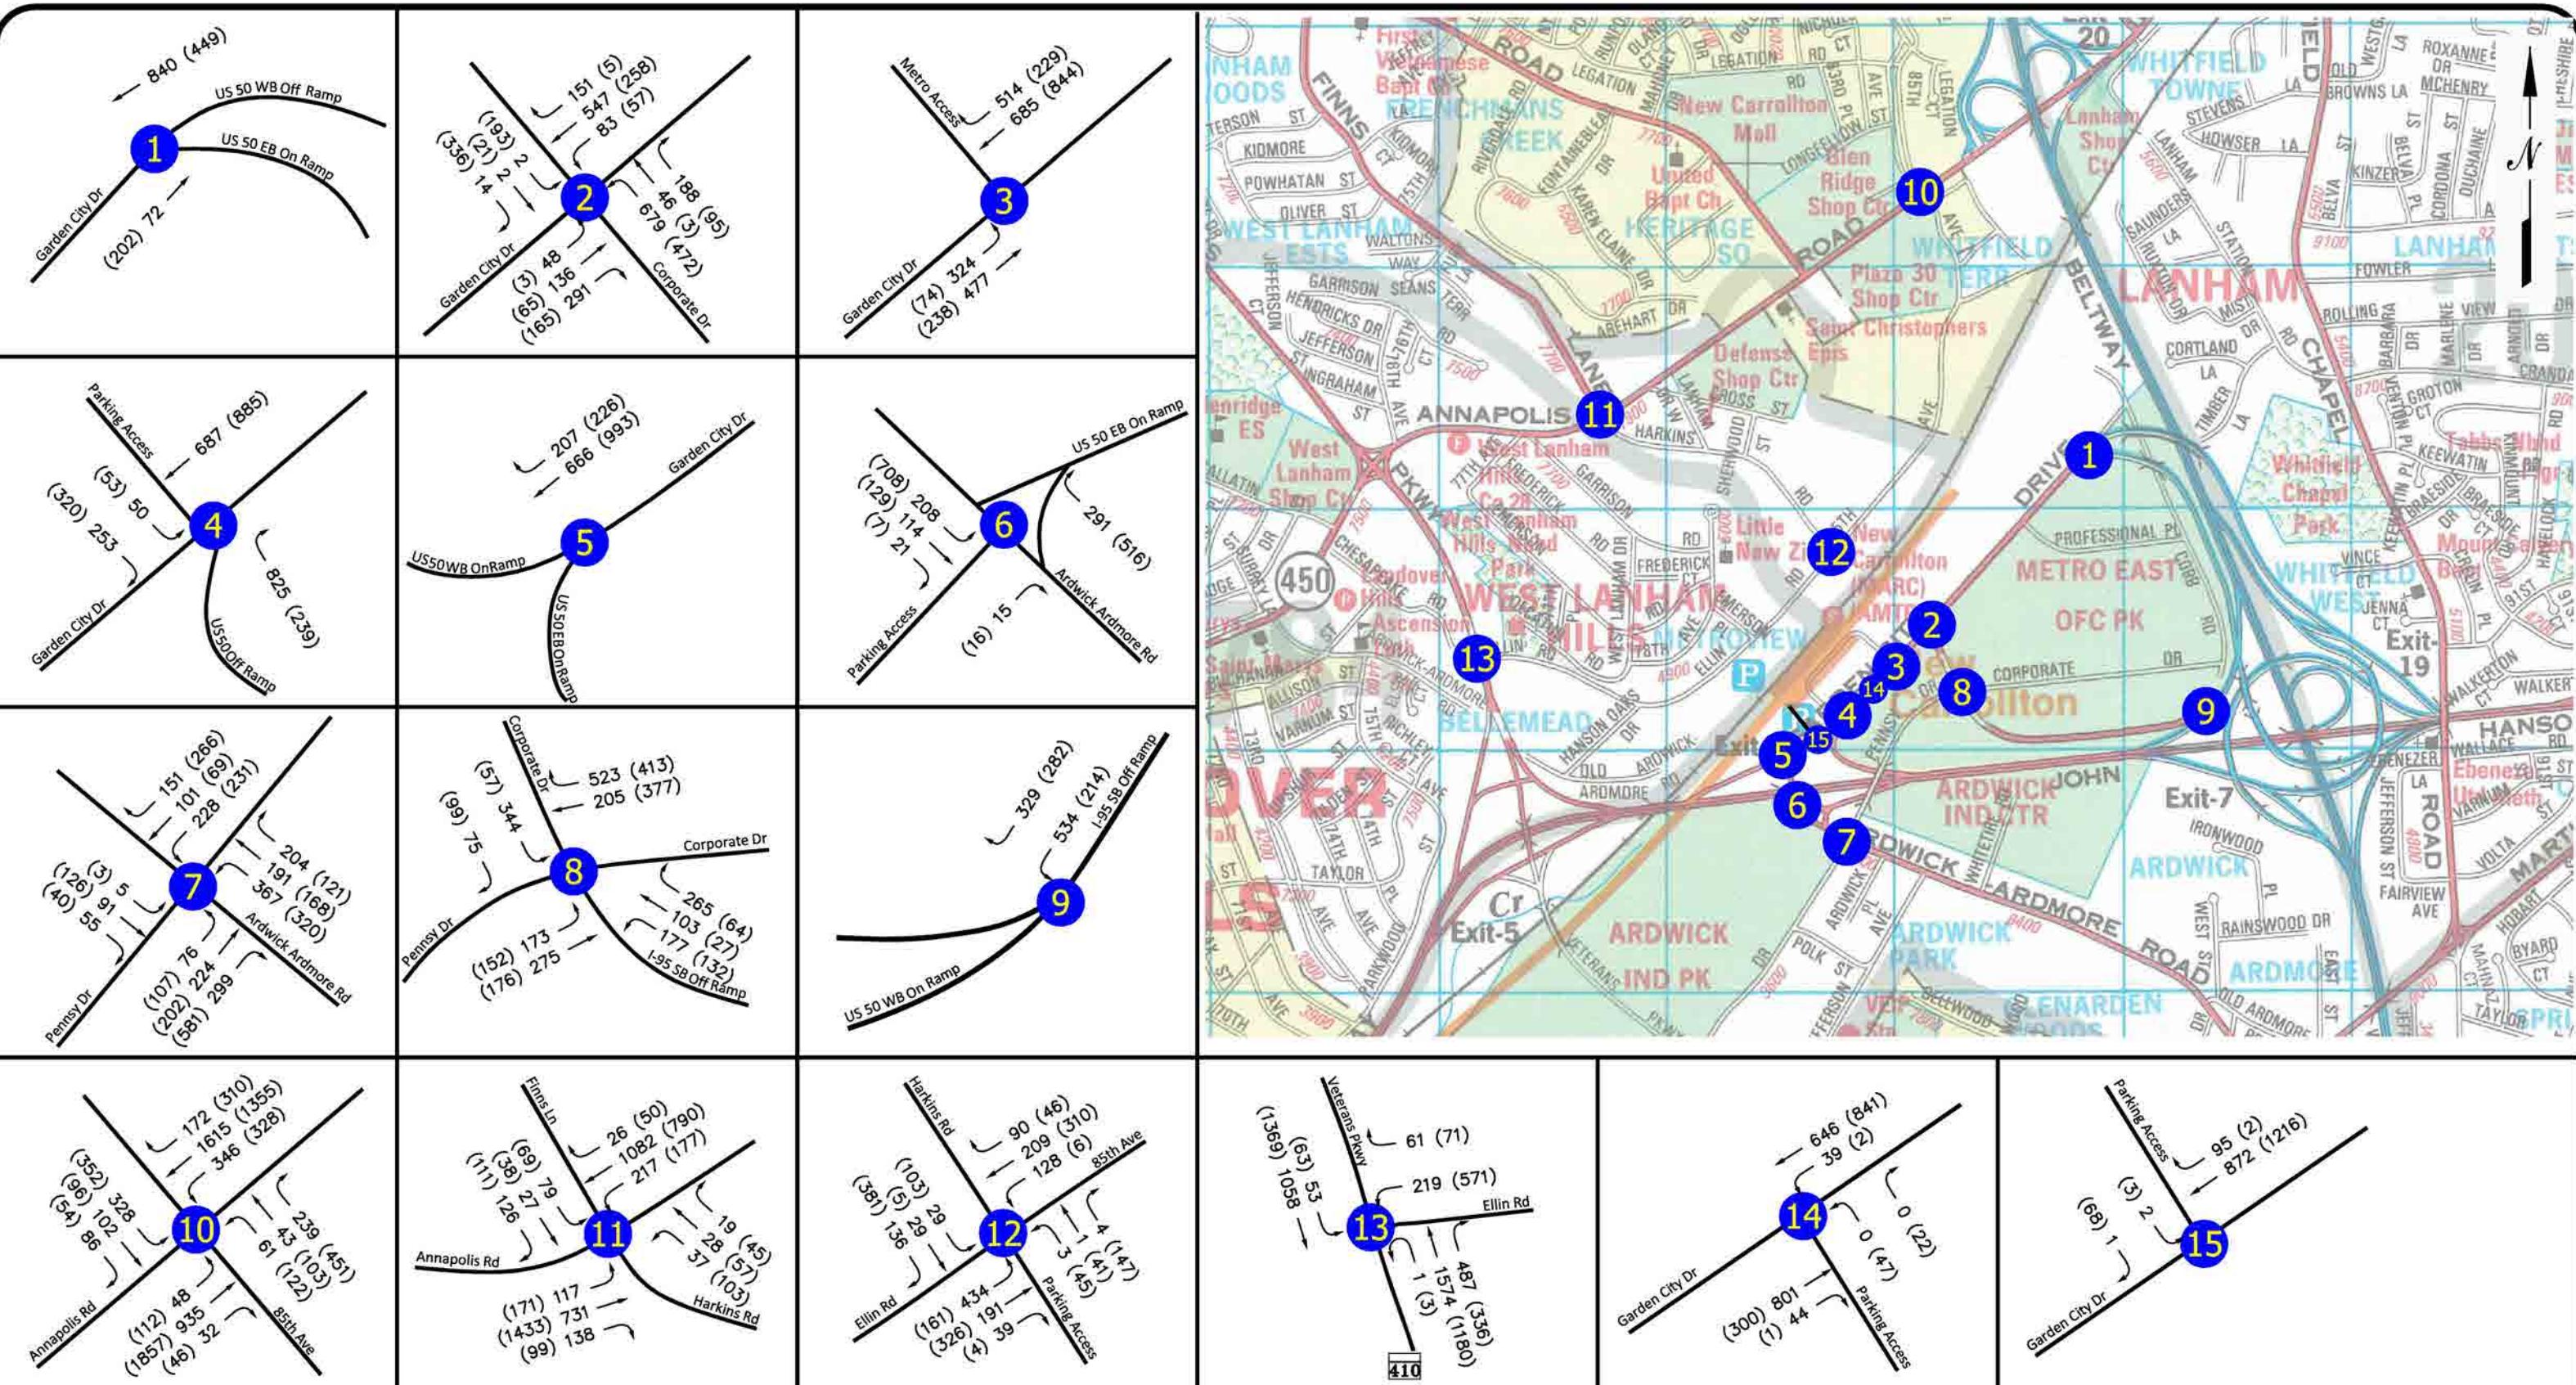

NOT TO SCALE
00 - MORNING PEAK HOUR
(00) - EVENING PEAK HOUR





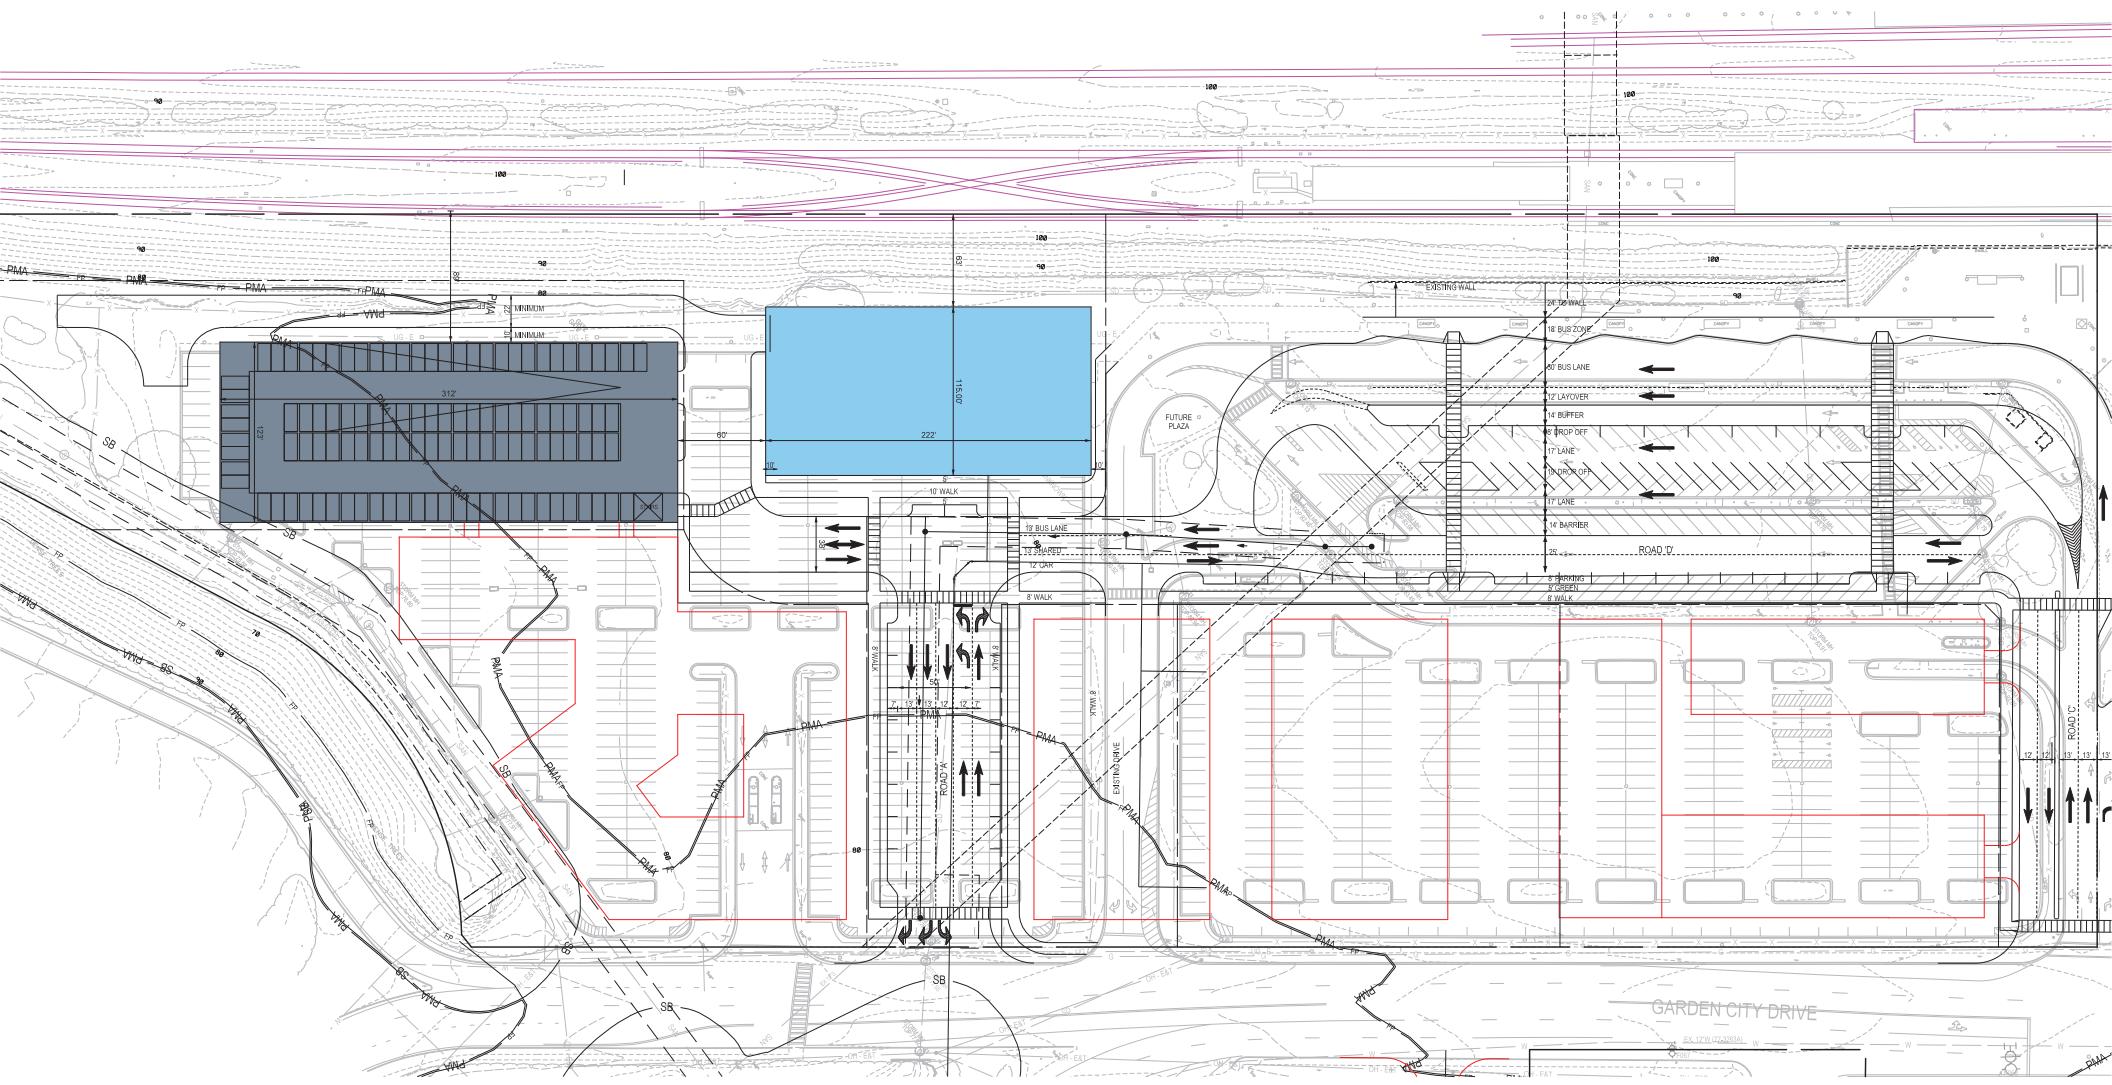


EXHIBIT 9B
REVISED ACCESS CONFIGURATION

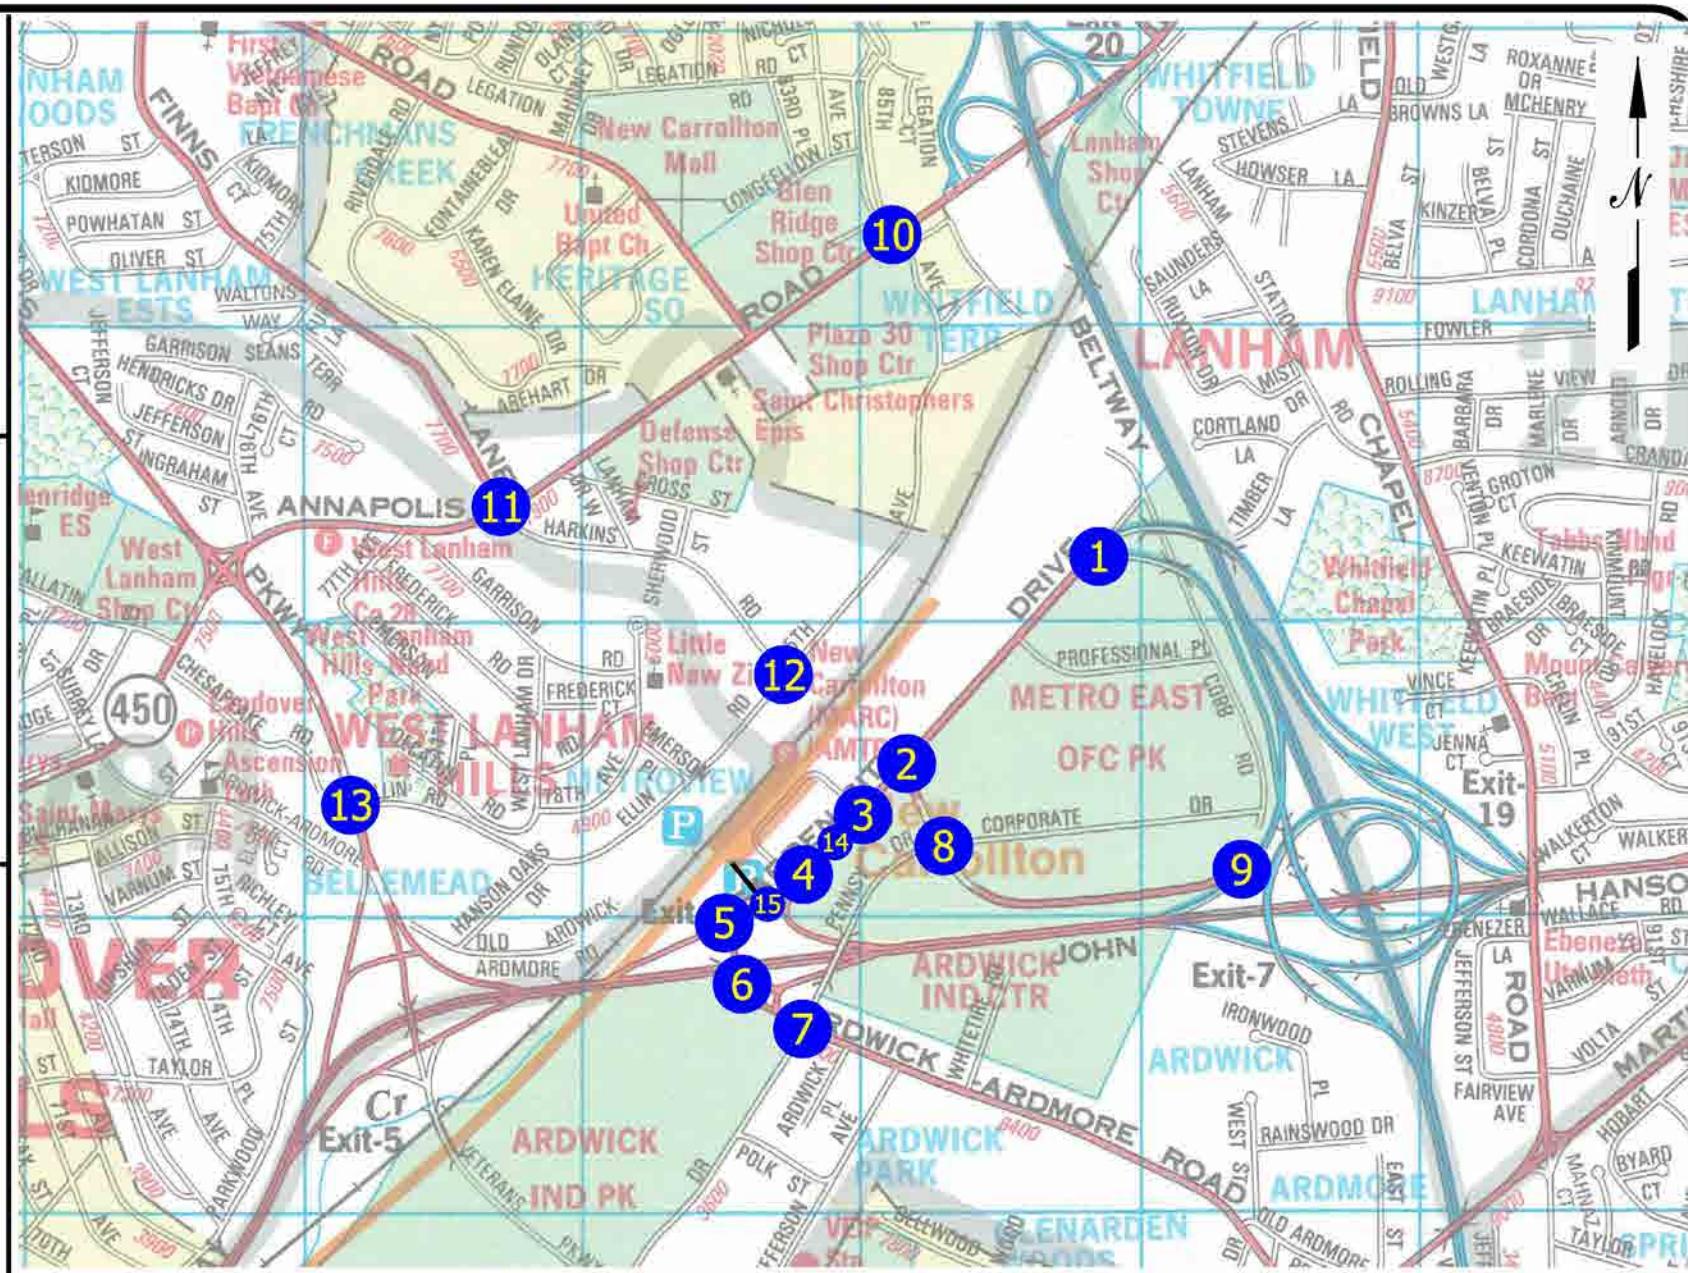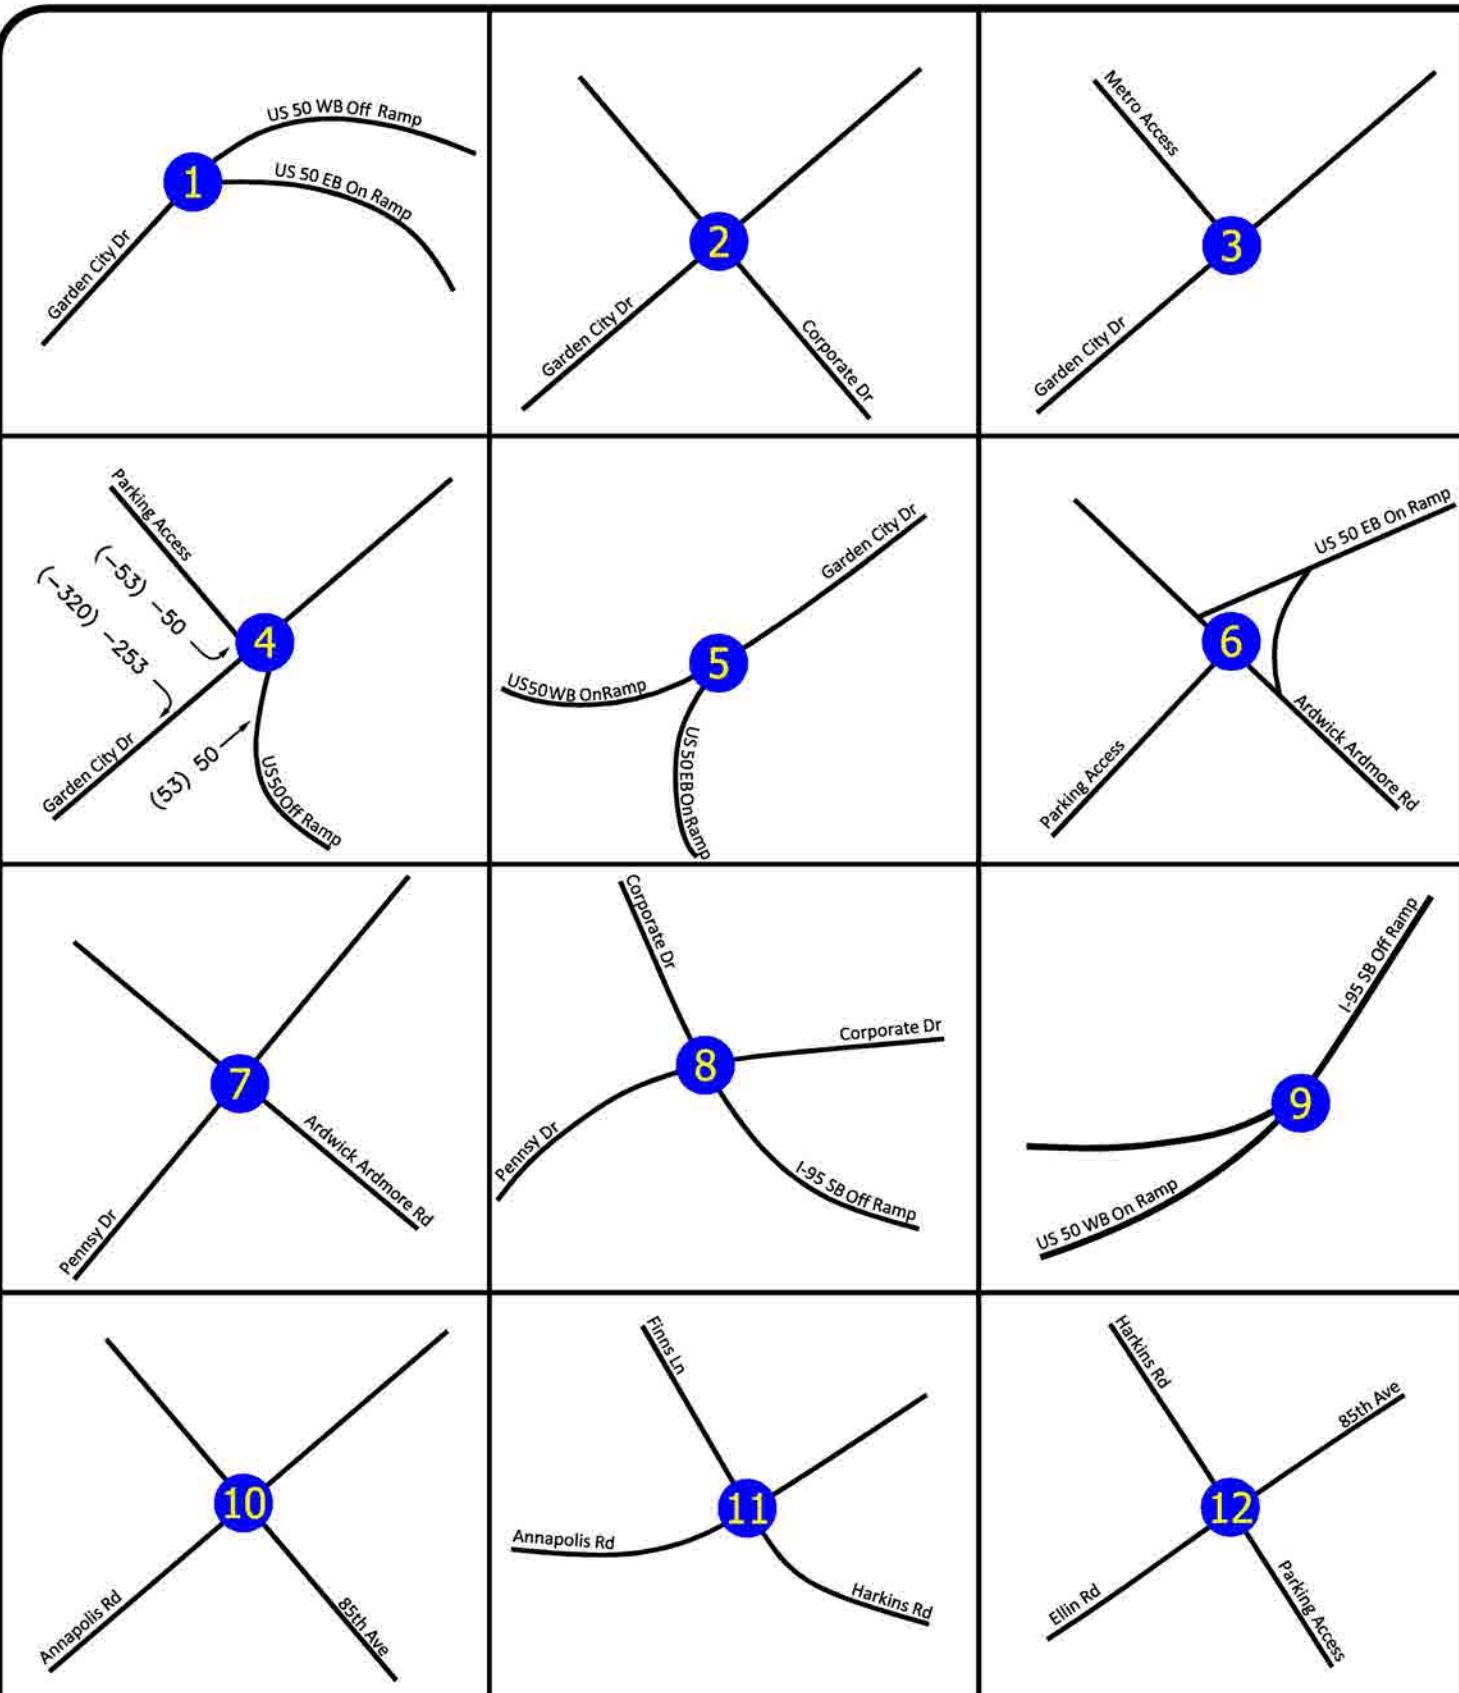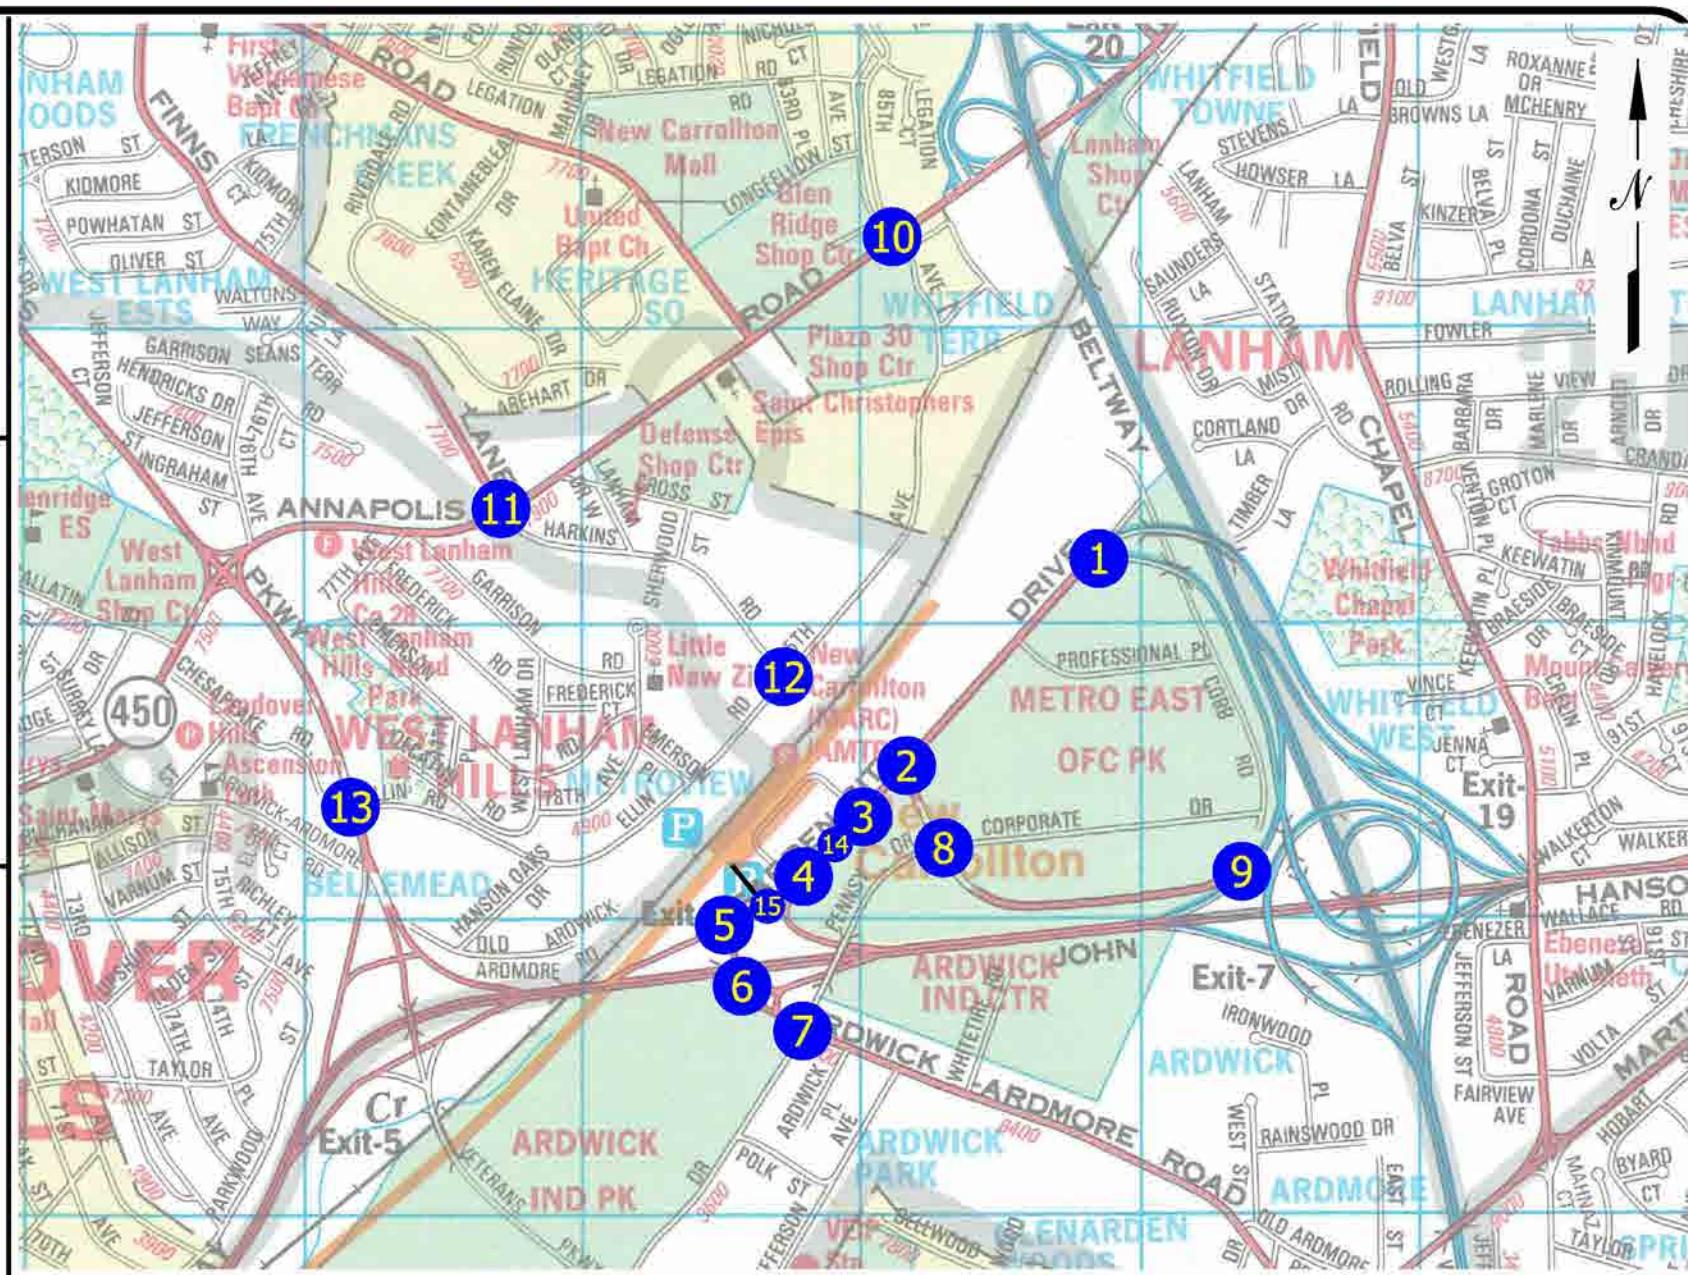

NOT TO SCALE
00 - MORNING PEAK HOUR
(00) - EVENING PEAK HOUR

EXHIBIT 9C
TRAFFIC ADJUSTMENT DUE TO
REVISED ACCESS CONFIGURATION

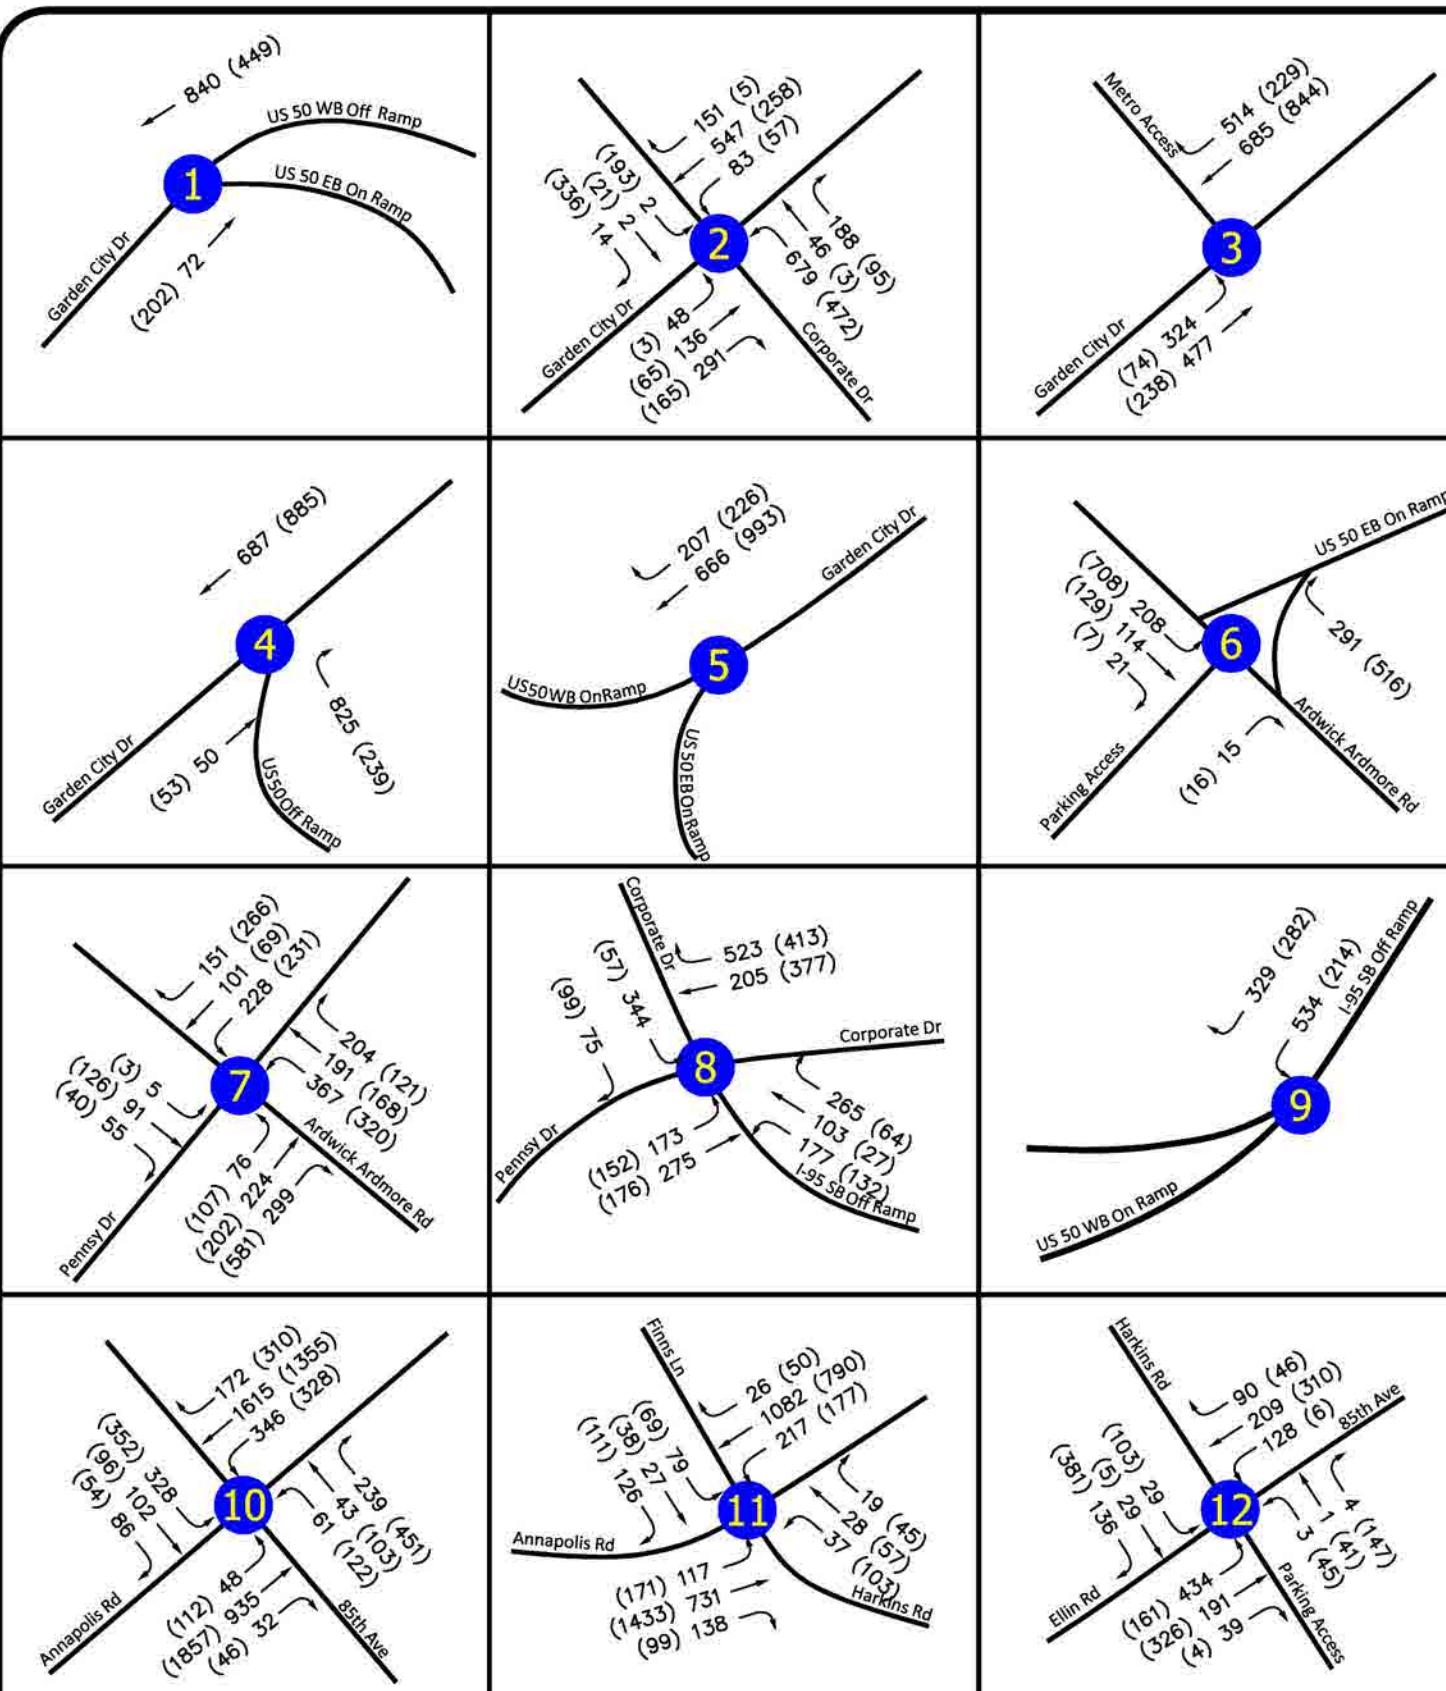

NOT TO SCALE
00 - MORNING PEAK HOUR
(00) - EVENING PEAK HOUR

EXHIBIT 9D

ADJUSTED 2026 BACKGROUND PEAK HOUR TRAFFIC VOLUMES

NEW CARROLLTON METRO STATION

Site Information

The New Carrollton TOD is planned to be developed with a variety of uses on the subject site. The following is a list of the total development planned on the site.

- 265 High-Rise Apartments
- 1,045 Mid-Rise Apartments
- 1,125,000 Sq Ft of Office Space
- 155,000 Sq Ft of Retail Space
- 180 Hotel Rooms

The breakdown of the development is shown on Exhibit 11.

Trip Generation/Distribution

In order to establish the peak hour trips projected to be generated by each of the proposed uses on the subject site, we have consulted the *M-NCPPC Trip Generation Guidelines* and the *Institute of Transportation Engineers Trip Generation Report (9th Edition)* to prepare Exhibit 10 which shows the peak hour trip generation rate projected to be generated by each of the uses planned on the subject site.

Exhibit 11 was prepared to show the peak hour trips projected to be generated by Buildings 1 through 11 planned on the subject site. The peak hour trips projected to be generated by the subject site were then distributed and assigned to the road system based on the information contained in Appendix D. Combining the trip assignments for each of the buildings results in the total trip assignments shown on Exhibit 12.

Combining the trip assignments for the subject site with the 2026 peak hour volumes results in the 2026 total peak hour traffic volumes shown on Exhibit 13..

Analysis of Total Traffic Conditions

Intersection Capacity Analyses were conducted for each of the study area intersections based on the 2026 total peak hour volumes, and the results are shown on Exhibit 14.

A review of Exhibit 14 indicates that using the CLV Methodology shows that all the study area intersections are projected to operate at acceptable Levels of Service “D” or better during the peak periods.

The CLV Methodology is an analysis methodology required by Prince George’s County to determine whether sufficient capacity exists at an intersection. Other methodologies exist which evaluate the road network in more detail based on operational concerns. For the purposes of this analysis, it was requested that the Vissim software program be used to develop a traffic simulation model based on the Year 2030 conditions, along Garden City Drive to determine whether sufficient storage space is available for turning vehicles based on a future development, and whether any operational concerns are identified.

We have conducted the analysis for the 2030 conditions, and the worksheets and results of this analysis are contained in Appendix E. A review of the results of the analysis using the Vissim software indicates that as with the results of the CLV Analysis, all of the intersections are projected to operate at acceptable levels of service. However, this analysis was based on projected 2030 volumes which indicated that two intersections should be considered for alternative improvements to address potential operational issues beyond the buildup of the site. These intersections are as follows:

- Garden City Drive and Corporate Drive
- Garden City Drive and Parking Access

Exhibit 15 has been prepared to show the alternate lane use which could be considered at these locations to avoid the potential for operational issues in the Year 2030 or beyond. We have rerun the analysis of the 2026 volumes using the CLV Methodology with these improvements, and the results are shown on Exhibit 14 under each of the intersections listed above on the line “alternate lane use.” A review of Exhibit 14 indicates that in addition to addressing the operational issues, these improvements would also enhance the capacity levels available at both locations.

Trip Generation Rates

Formula/Rate	AM Peak Hour		PM Peak Hour	
	IN	OUT	IN	OUT
Apartment (Garden and Mid-Rise Dwelling Units, Prince George's County Rate)				
Morning Trips = 0.52 x Units			(trips/unit)	
Evening Trips = 0.60 x Units	0.10	0.42	0.39	0.21
Apartment (High-Rise Dwelling Units, Prince George's County Rate)				
Morning Trips = 0.30 x Units			(trips/unit)	
Evening Trips = 0.40 x Units	0.06	0.24	0.26	0.14
Office (ksf, Prince George's County Rate)				
Morning Trips = 2.0 x ksf			(trips/unit)	
Evening Trips = 1.85 x ksf	1.80	0.20	0.35	1.50
Retail (ksf, ITE-820)				
Ln(Morning Trips) = 0.61 x Ln (ksf) + 2.24			Directional Distribution	
Ln(Evening Trips) = 0.67 x Ln(ksf) + 3.31	62%	38%	48%	52%
Hotel Rooms (ITE-310)				
Morning Trips = 0.53 x Rooms			Directional Distribution	
Evening Trips = 0.60 x Rooms	59%	41%	51%	49%




Trip Generation

No.	Land Use	Size	AM Peak Hour			PM Peak Hour		
			In	Out	Total	In	Out	Total
Building No 1 - 5								
	High-Rise Apartments	265	Units					
	Mid-Rise Apartments	350	Units					
	Residential	615	Units	14	59	73	30	20
	Office	505,000	sq.ft.	367	31	398	71	309
	Retail	120,000	sq.ft.	10	6	16	34	32
	Retail Pass-by Trips			6	4	10	22	21
	Hotel	180	Rooms	10	1	11	7	8
Building No 6								
	Mid-Rise Apartments	370	Units					
	Residential	370	Units	10	44	54	35	20
	Retail	15,000	sq.ft.	3	2	5	8	7
	Retail Pass-by Trips			3	2	5	8	7
Building No 7 ~ 9								
	Mid-Rise Apartments	140	Units					
	Residential	140	Units	4	16	20	12	7
	Office	345,000	sq.ft.	264	27	291	51	219
	Retail	5,000	sq.ft.	1	1	2	3	3
	Retail Pass-by Trips			1	1	2	4	4
Building No 10 ~ 11								
	Mid-Rise Apartments	185	Units					
	Residential	185	Units	5	21	26	13	8
	Office	275,000	sq.ft.	208	19	227	39	173
	Retail	15,000	sq.ft.	2	1	3	7	6
	Retail Pass-by Trips			2	2	4	8	7
Total Trips for New Carrollton								
	High-Rise Apartments	265	Units					
	Mid-Rise Apartments	1,045	Units					
	Residential	1,310	Units	33	140	173	90	55
	Office	1,125,000	sq.ft.	839	77	916	161	701
	Retail	155,000	sq.ft.	16	10	26	52	48
	Hotel	180	Rooms	10	1	11	7	8
Total Pass-by Trips				12	9	21	42	39
Total Trips				898	228	1126	310	812
								1122

Note: Detail calculations and support documents refer to Appendix D.




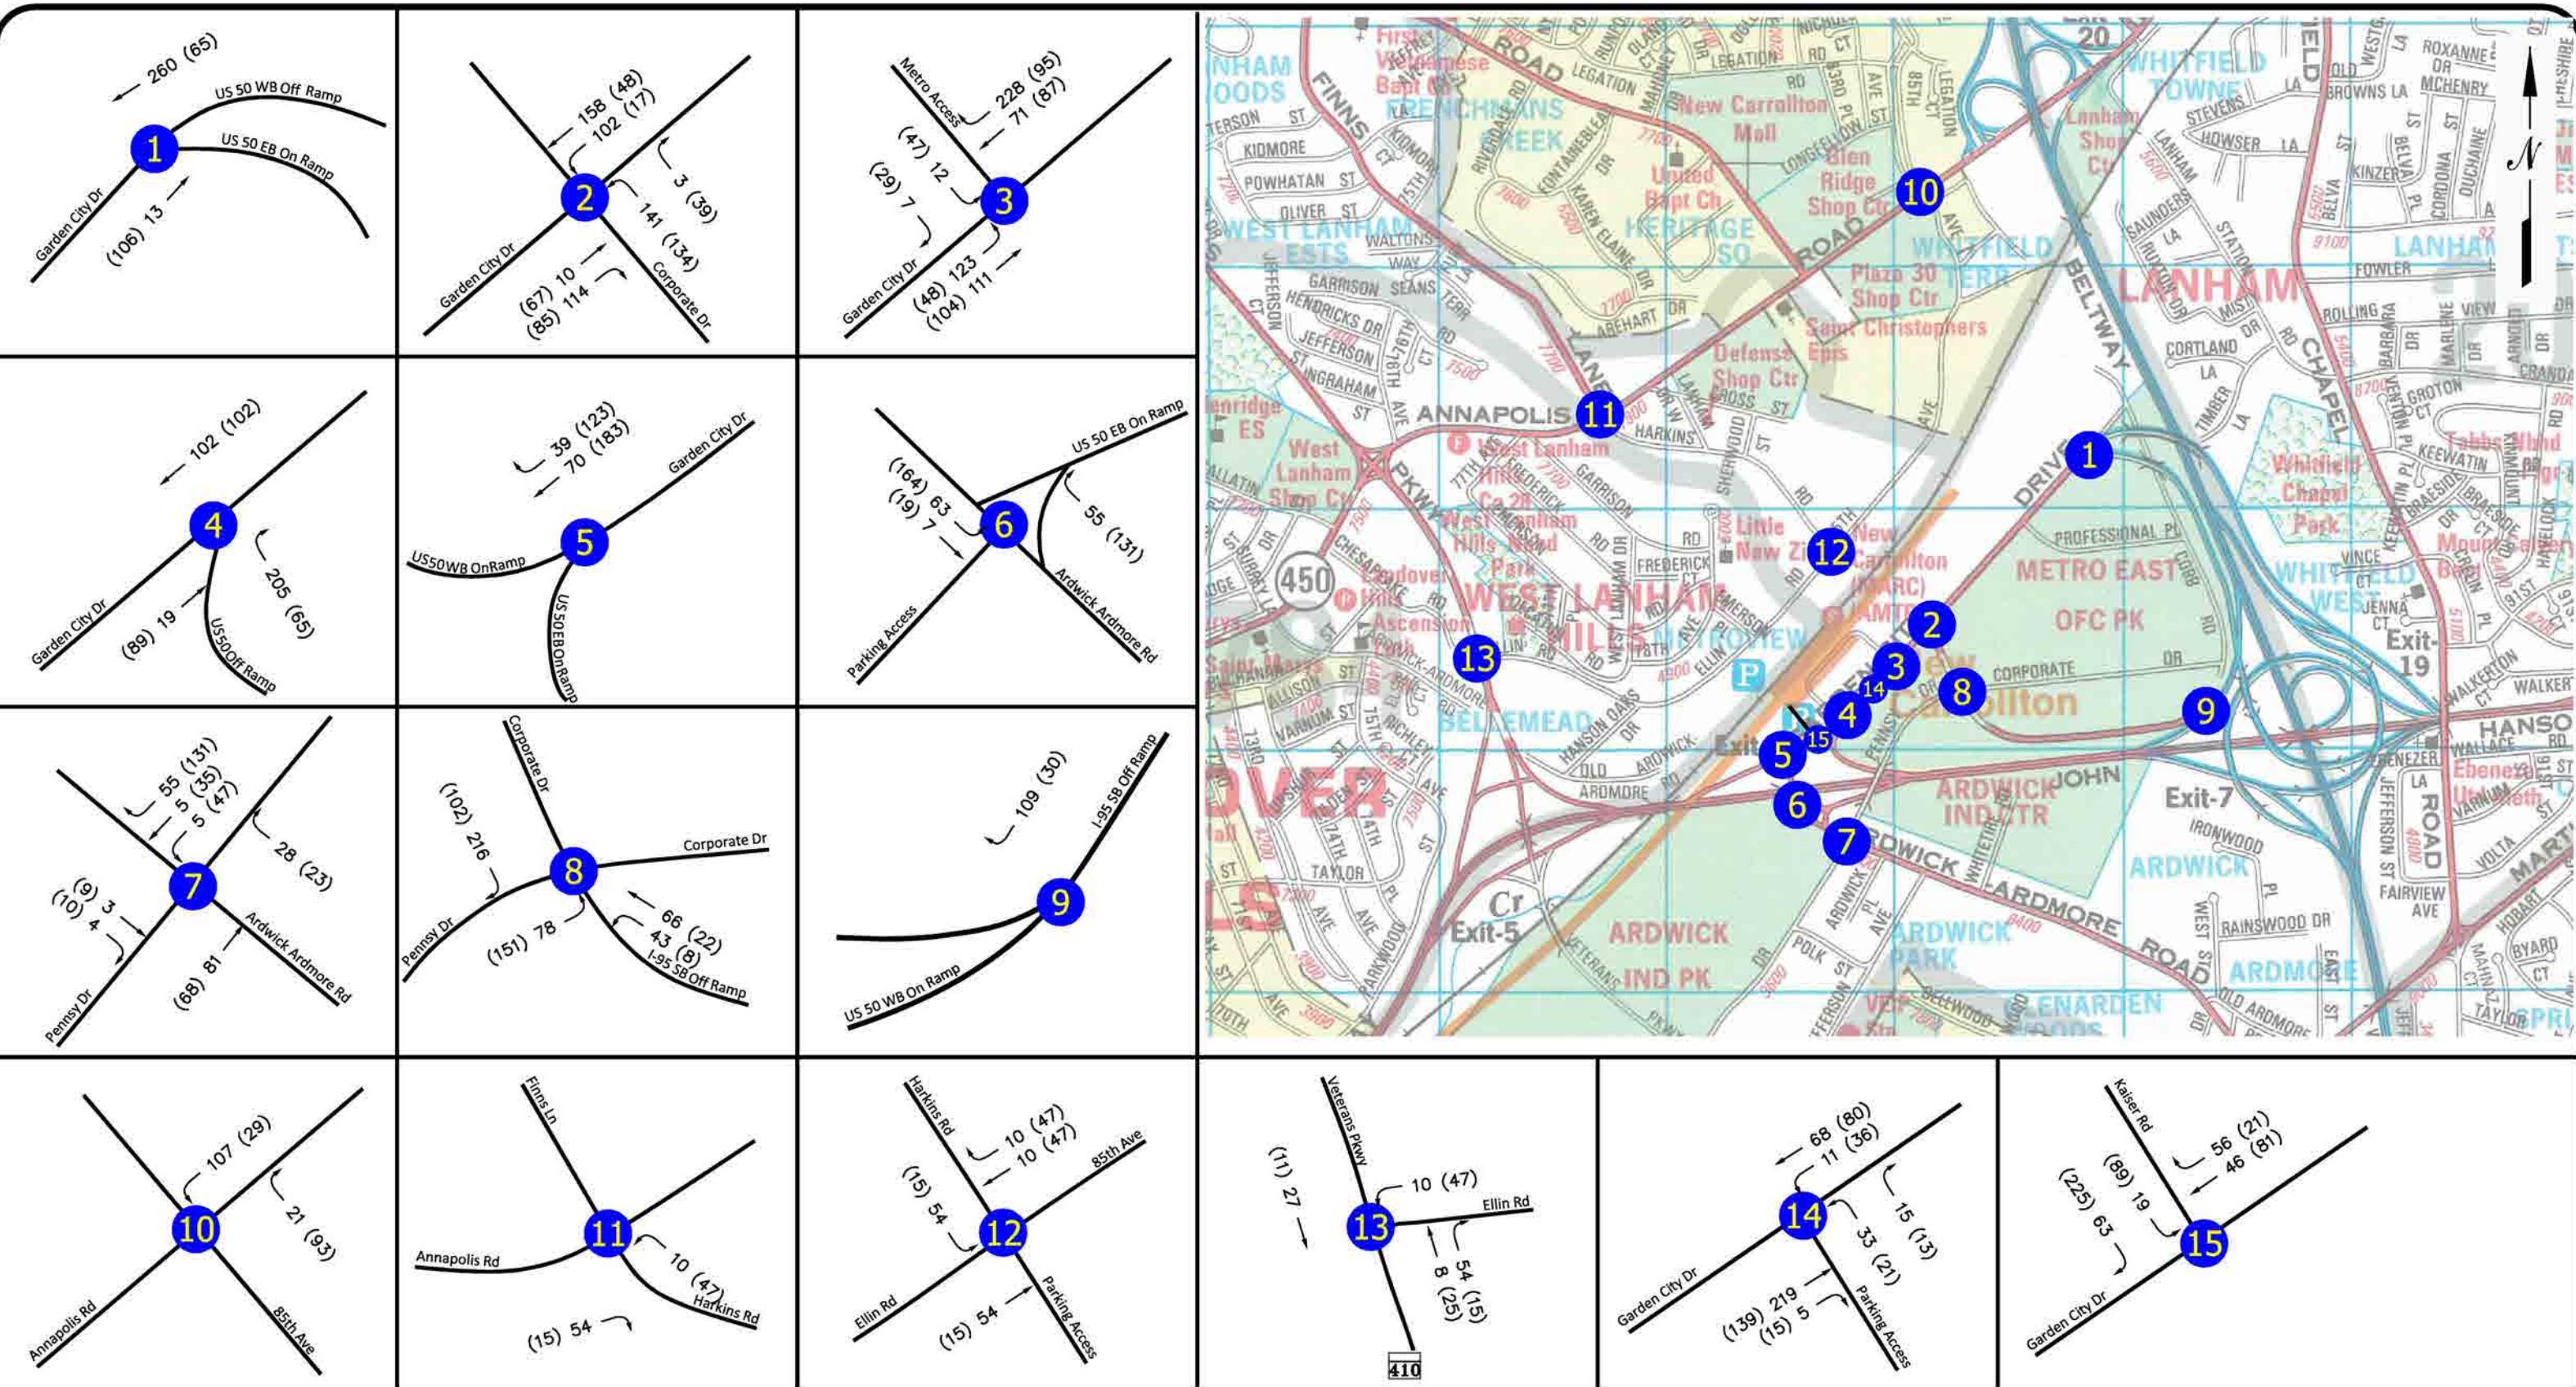

NOT TO SCALE
00 - MORNING PEAK HOUR
(00) - EVENING PEAK HOUR

Note:
Trip assignment details refer to Appendix D.

EXHIBIT 12
TRIP ASSIGNMENT
FOR SUBJECT SITE

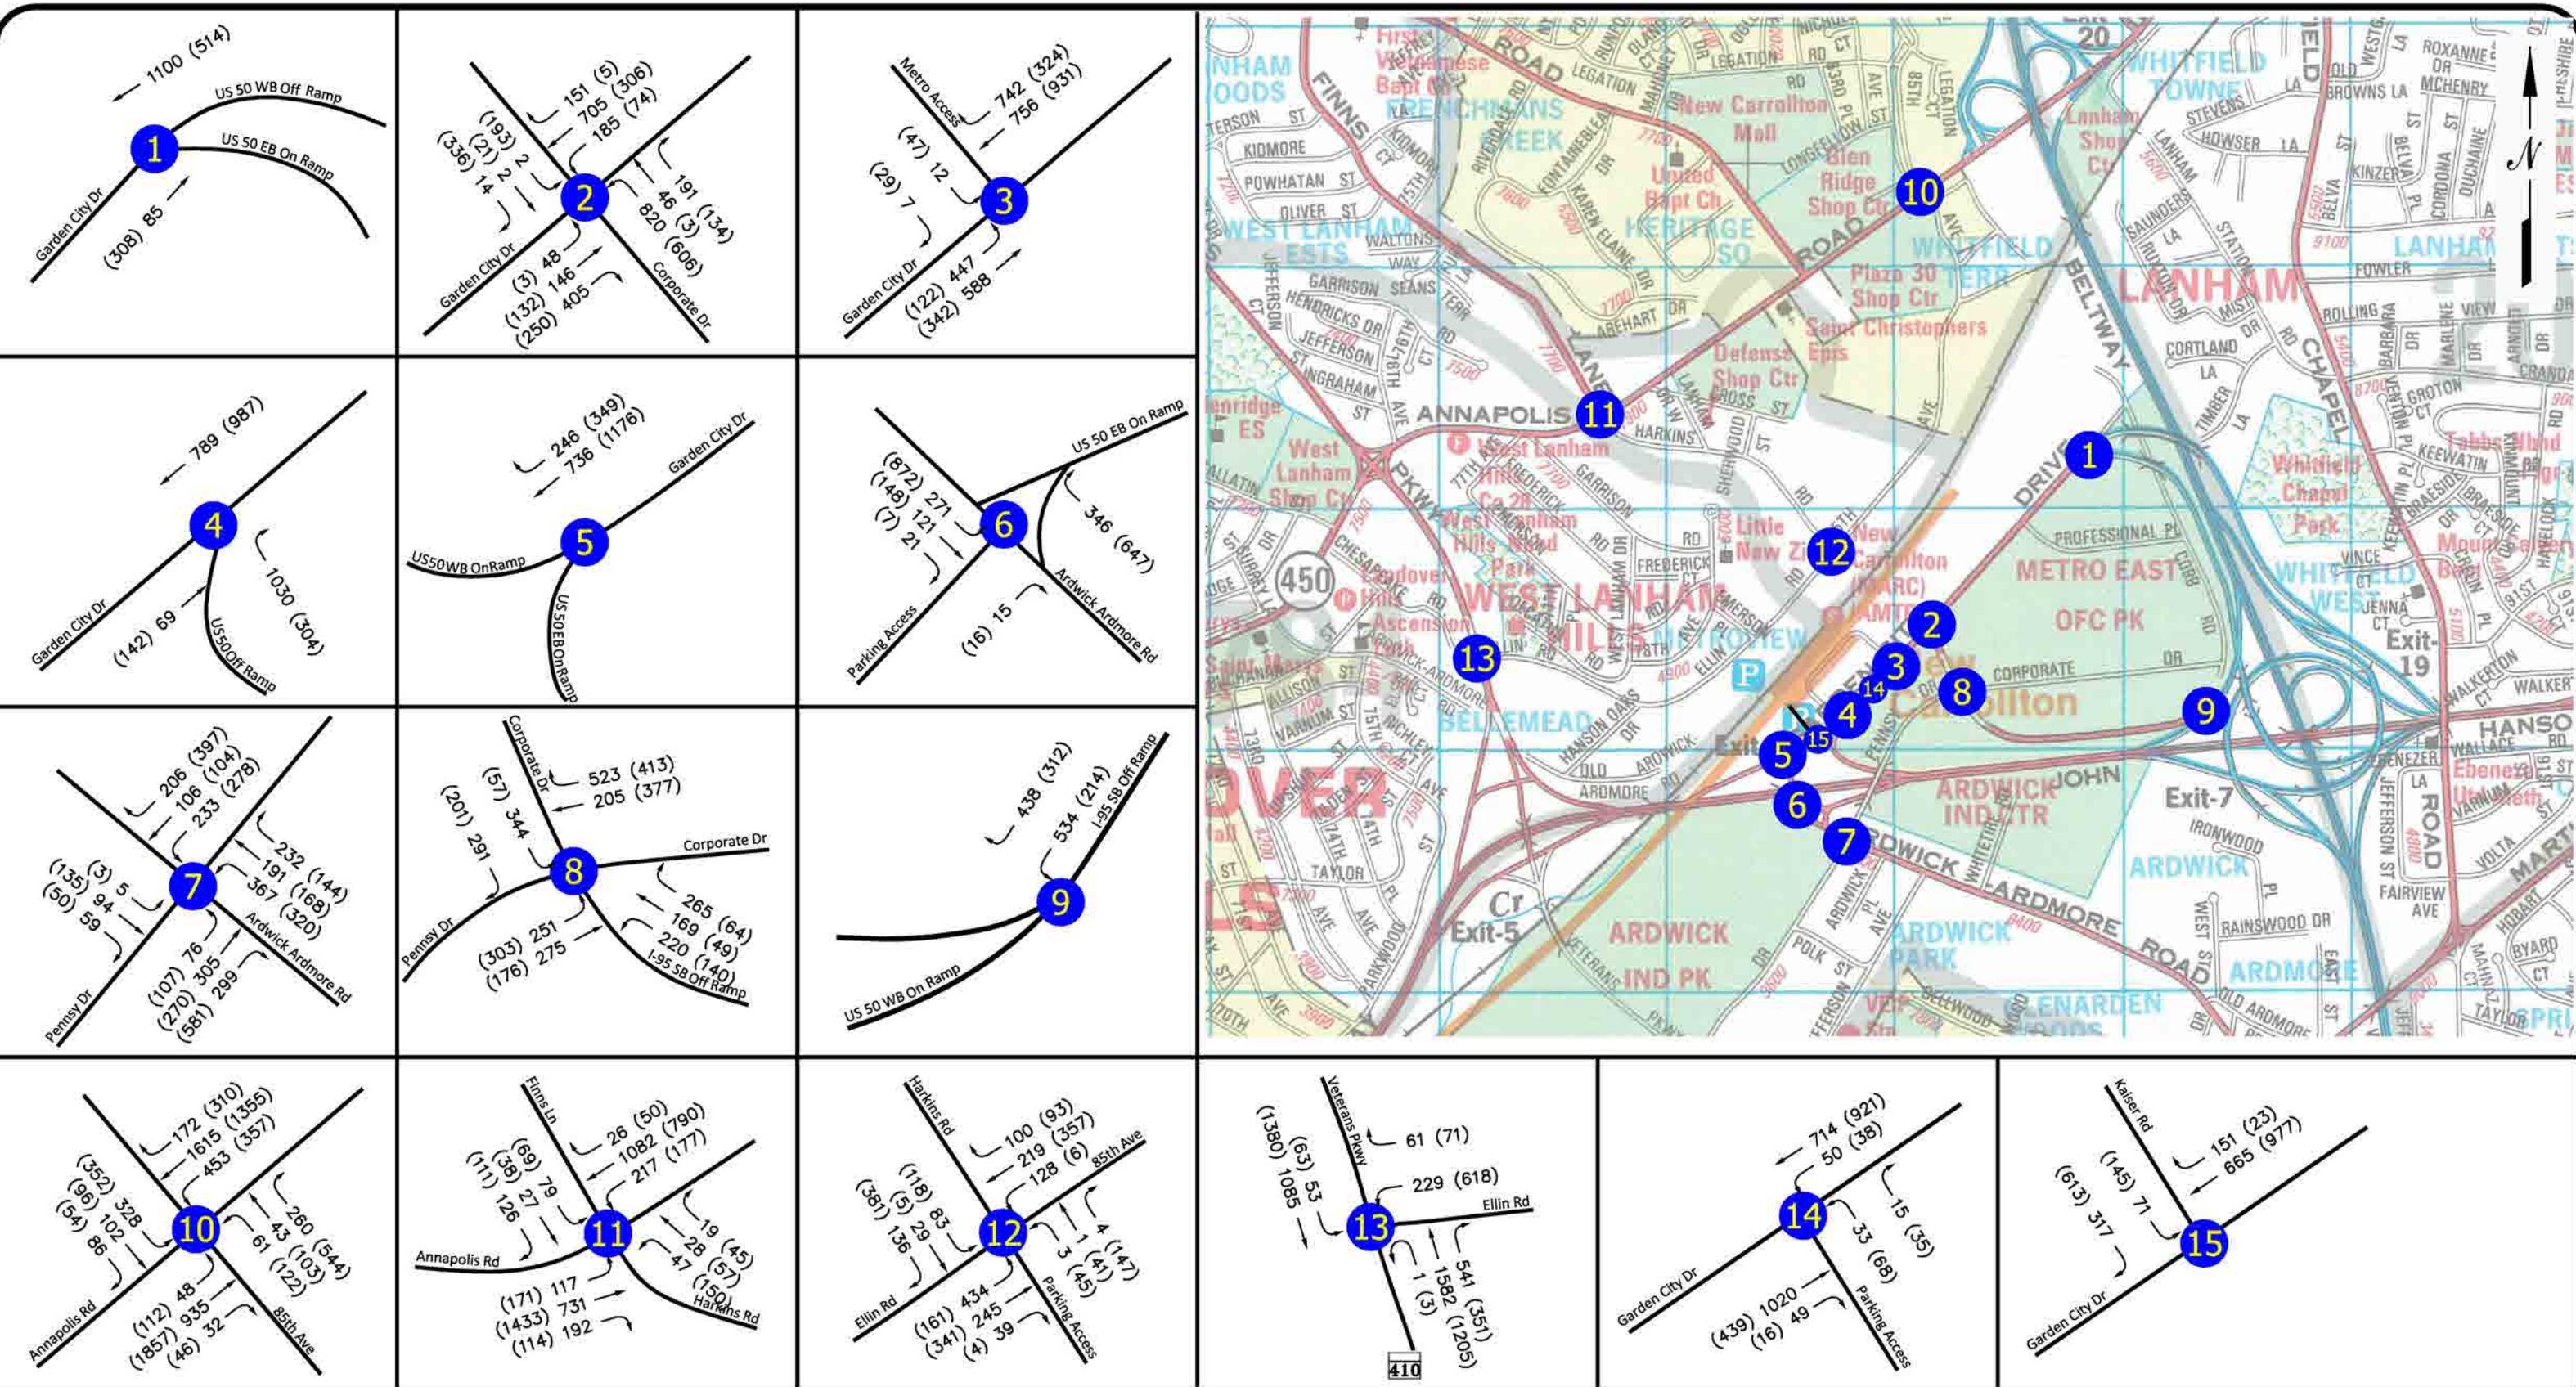

NOT TO SCALE

00 - MORNING PEAK HOUR
(00) - EVENING PEAK HOUR

EXHIBIT 13
2026 TOTAL PEAK
HOUR TRAFFIC VOLUMES


CLV	Existing Traffic	Background Traffic	Total Traffic
	Morning Peak Hour Traffic	LOS / CLV	LOS / CLV
1. US 50 WB Off Ramp & Garden City Dr	---	---	---
2. Garden City Dr & Corporate Dr w/Alternate Lane Use	A / 862	C / 1183	D / 1426
3. Garden City Dr & Metro Access w/Alternate Lane Use	A / 797	A / 838	C / 1189
4. Garden City Dr & US 50 EB Off Ramp/Parking Ent	A / 736	B / 1085	B / 1001
5. Garden City Dr & US 50 On Ramp	---	---	---
6. Ardwick Ardmore Rd & US 50 EB On Ramp	A / 193	A / 204	A / 242
7. Ardwick Ardmore Rd & Pennsy Dr	A / 951	B / 1082	C / 1177
8. Garden City Dr & Corporate Dr/I-95 SB Off Ramp	A / 580	A / 976	C / 1163
9. I-95 Sb Off Ramp & US 50 WB On Ramp	---	---	---
10. MD 450 & 85th Ave	A / 878	A / 966	B / 1053
11. MD 450 & Finns Ln/Harkins Rd	A / 645	A / 690	A / 720
12. 85th Ave/Ellin Rd & Harkins Rd/Parking	A / 474	A / 578	A / 639
13. MD 410 & Ellin Rd	A / 963	B / 1050	B / 1060
14. Garden City Dr & Parking Access	A / 297	A / 441	A / 578
15. Garden City Dr & Parking Access Garden City Dr & Kaiser Rd	A / 180	A / 360	---
	---	---	A / 476
Evening Peak Hour Traffic			
1. US 50 WB Off Ramp & Garden City Dr	---	---	---
2. Garden City Dr & Corporate Dr w/Alternate Lane Use	A / 709	A / 884	B / 1012
3. Garden City Dr & Metro Access w/Alternate Lane Use	A / 391	A / 538	A / 681
4. Garden City Dr & US 50 EB Off Ramp/Parking Ent	A / 719	A / 938	A / 710
5. Garden City Dr & US 50 On Ramp	---	---	---
6. Ardwick Ardmore Rd & US 50 EB On Ramp	A / 457	A / 480	A / 581
7. Ardwick Ardmore Rd & Pennsy Dr	A / 883	B / 1024	C / 1196
8. Garden City Dr & Corporate Dr/I-95 SB Off Ramp	A / 604	A / 724	A / 905
9. I-95 Sb Off Ramp & US 50 WB On Ramp	---	---	---
10. MD 450 & 85th Ave	C / 1180	C / 1284	D / 1365
11. MD 450 & Finns Ln/Harkins Rd	A / 821	A / 961	B / 1013
12. 85th Ave/Ellin Rd & Harkins Rd/Parking	A / 556	A / 660	A / 695
13. MD 410 & Ellin Rd	A / 953	B / 1055	B / 1097
14. Garden City Dr & Parking Access	A / 386	A / 534	A / 651
15. Garden City Dr & Parking Access Garden City Dr & Kaiser Rd	A / 412	A / 519	---
	---	---	A / 707



Note: CLV standard for developed tier is 1600.

EXHIBIT 14

RESULTS OF INTERSECTION CAPACITY ANALYSES (CLV)

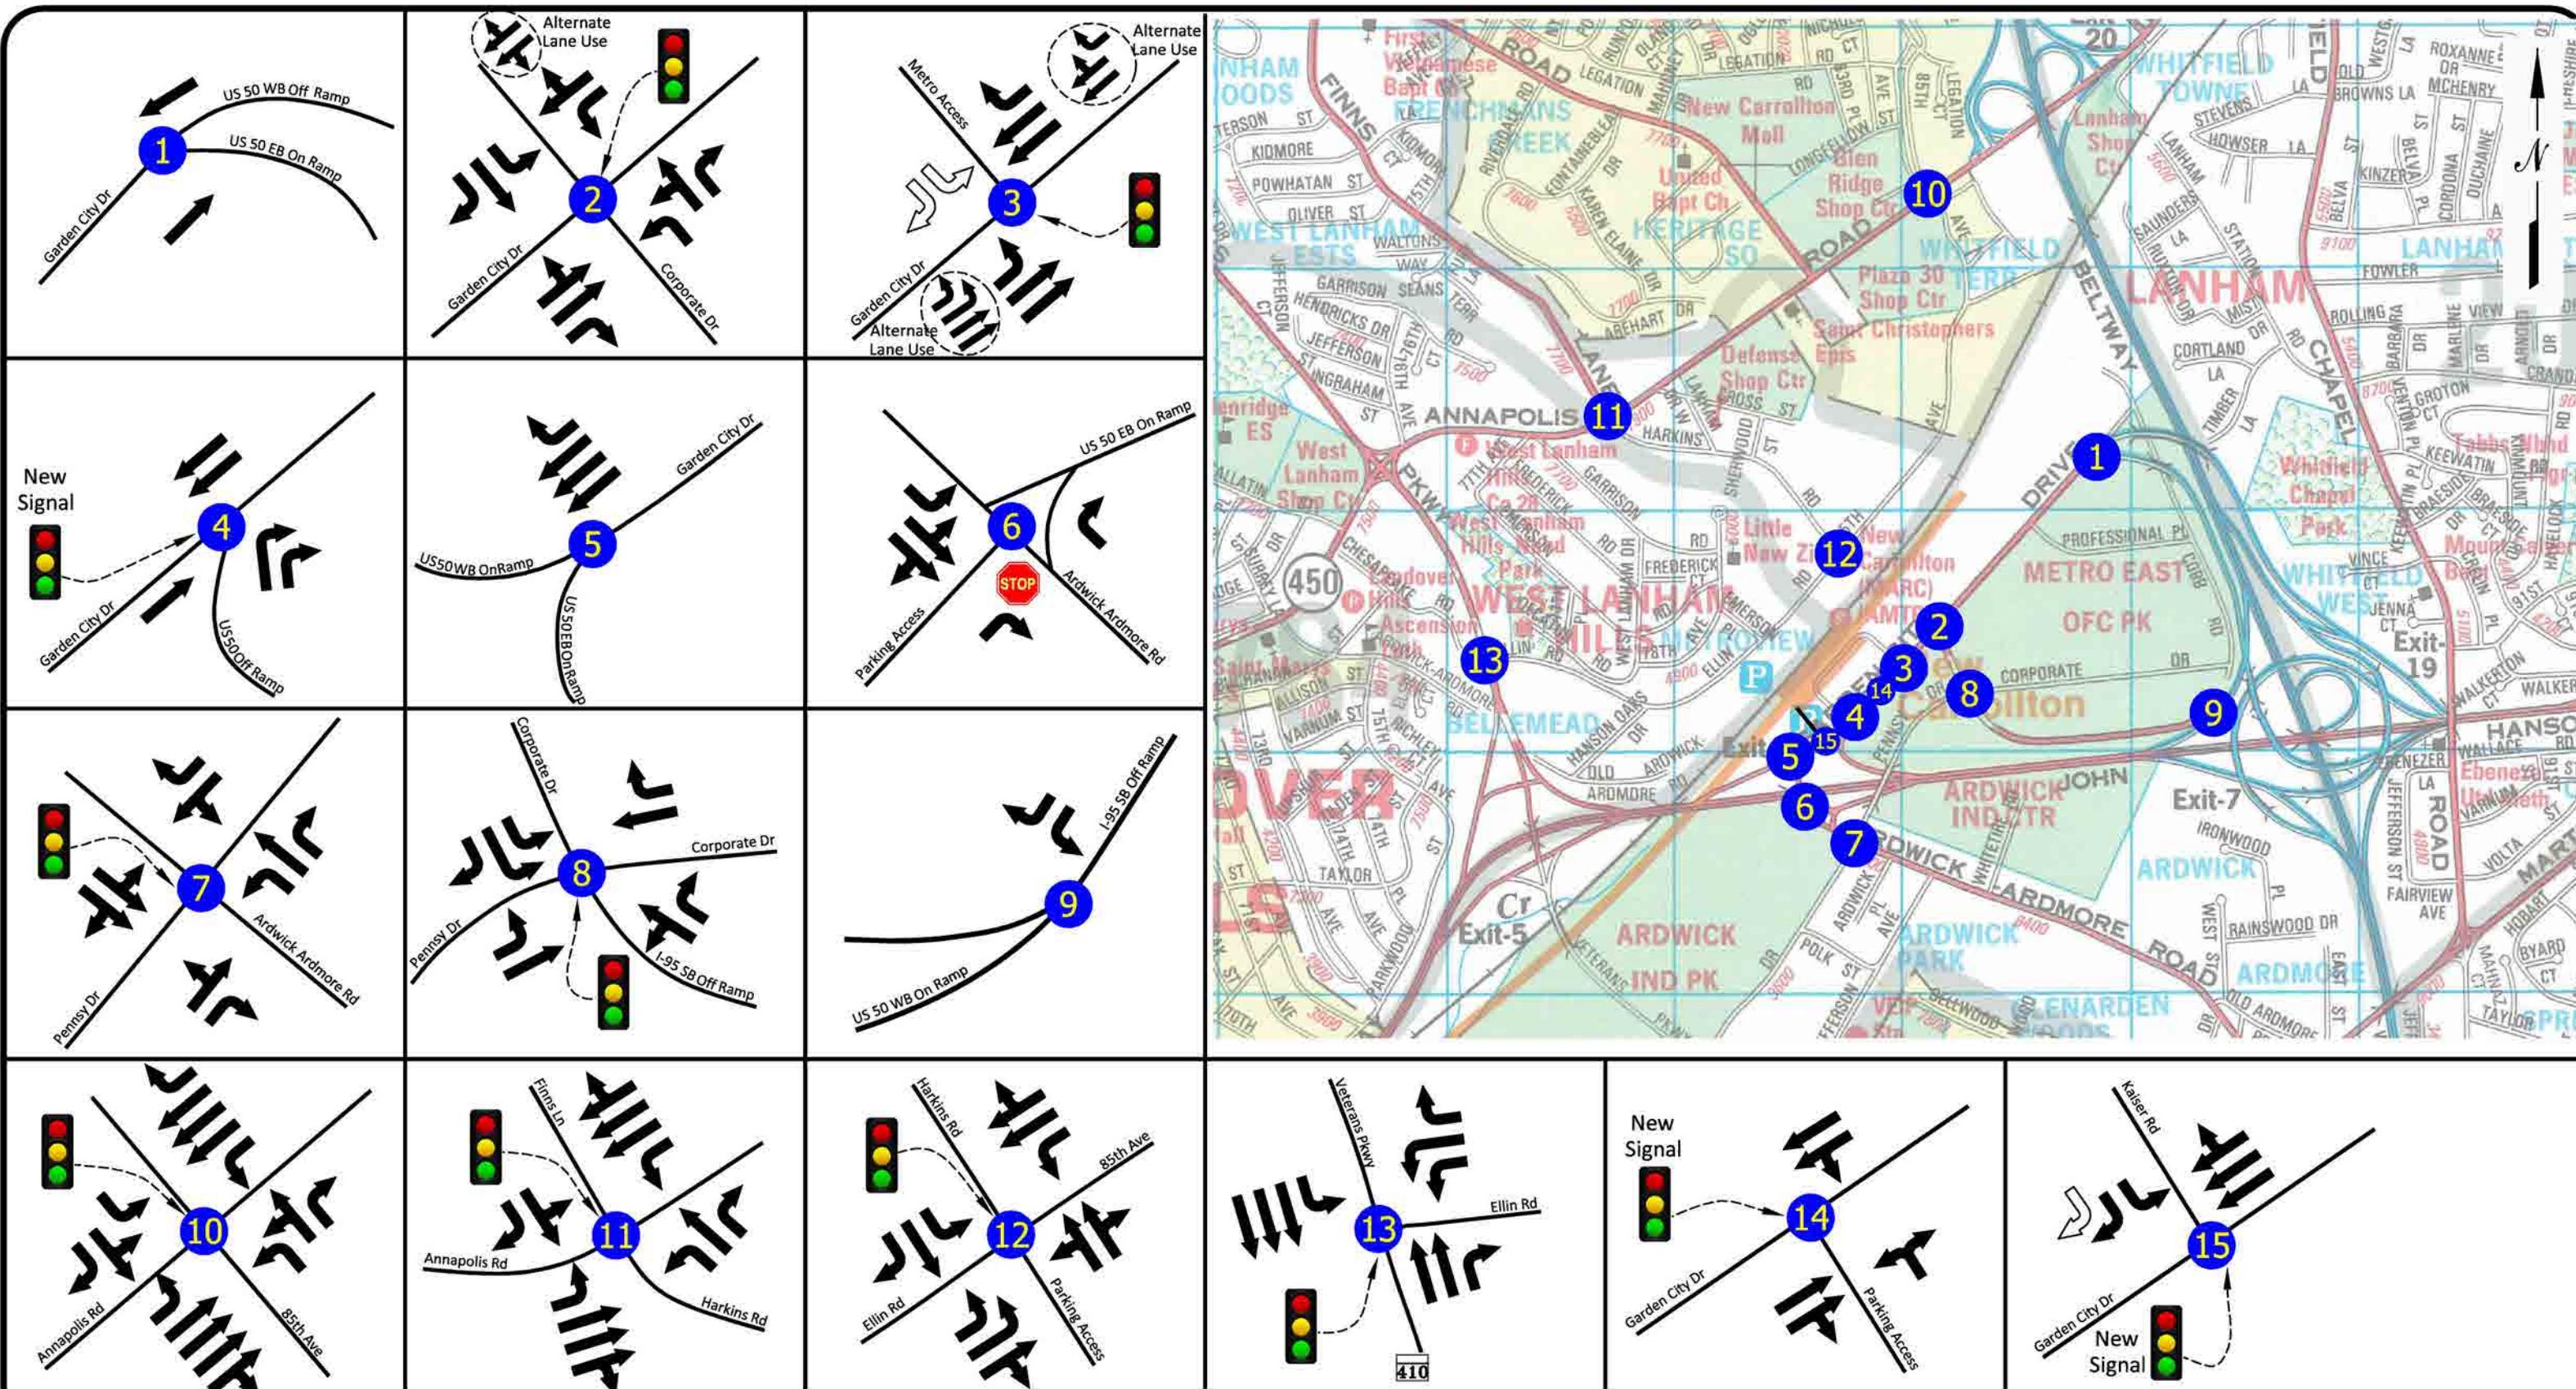

NOT TO SCALE

EXHIBIT 15
FUTURE LANE USE

RESULTS, RECOMMENDATIONS, AND CONCLUSIONS

Study Purpose

This Traffic Impact Analysis was prepared to address the proposed development of the “south side” of the New Carrollton Metro Station located in Prince George’s County, Maryland. This property has development proposed along the north and south sides of the track, both of which are within close proximity to the Metro Station/Marc Station/Amtrak Station Tracks.

Study Criteria/Methodology

This Traffic Impact Analysis was prepared in accordance with the requirements outlined by the Maryland-National Capital Park and Planning Commission (M-NCPPC) and in coordination with WMATA and the Maryland State Highway Administration (SHA). The parameters for this traffic study were established in an approved Traffic Impact Study Scoping Agreement executed with M-NCPPC. A copy of this agreement is contained in Appendix A of this report.

Exhibit 1A was prepared to show the location of the subject property and the intersections that were determined to be critical to this analysis. It should be noted that Mainline I-495, Mainline MD-410, and Mainline US 50 were not studied or analyzed as part of this report.

Summary of Findings and Recommendations

The results of this analysis have indicated that the road network is capable of supporting the traffic projected to be generated by this site. Two intersection improvements have been recommended which will enhance traffic operations, however, are not needed for capacity reasons.

APPENDIX A

**Scope Letter,
Intersection Turning Movement Counts,
and Photos**



Figure 1: Traffic Impact Study Scoping Agreement, Pages 1 & 2

The Maryland-National Capital Park and Planning Commission
 Prince George's County Planning Department
 Transportation Planning Section, Countywide Planning Commission

This form must be completed prior to commencing a Traffic Impact Study (TIS). The completed and signed Scoping Agreement should be submitted to the Transportation Planning Section (TPS) by the traffic consultant for concurrence and signature. TPS will return a signed copy, with any comments, to the traffic consultant for inclusion in the TIS. Failure to conduct the study in accordance with the guidelines and the signed Scoping Agreement may be grounds for rejection of the study, thereby necessitating an addendum or a new study prior to the start of the staff review.


Project Name:	<i>NEW CARROLLTON T.O.D.</i>
Policy Tier (Developed, Developing, or Rural): Please note if in Center or Corridor:	<i>METRO STATION - DEVELOPED</i>
Type of Application (see Figure 3):	<i>PPS '2.74 M. SF MIXED USE</i>
Project Location:	<i>NEW</i>
Traffic Consultant Name: Contact Number(s):	<i>THE TRAFFIC GROUP, INC.</i>

Describe the Proposal Under Study: Residential—Number & Type of Units: Commercial—Amount & Type of Space: Other Uses and Quantity:	<i>1310 APTS. 1,125 M SF OFFICE 155K RETAIL</i>	<i>180 Rm HOTEL</i>	<i>10 YEAR BUILD 0.50% / YR GROWTH</i>
Are pass-by trip rates in accordance with the Guidelines? (circle one)	<input checked="" type="radio"/> Yes	No	If No, please provide explanation on separate sheet.
Are there diverted trips? (circle one)	Yes	<input checked="" type="radio"/> No	If Yes, please provide explanation on separate sheet.
Will a TOD credit be used? (Section 4 of the Guidelines) (circle one)	<input checked="" type="radio"/> Yes	No	Note that all development in Centers and Corridors will be evaluated for TOD.
Will a transit facilities credit be used? (Section 5 of the Guidelines) (circle one)	<input checked="" type="radio"/> Yes	No	Need/nexus must be justified in study, and it must be supported by operating agency
Will a bike/ped facilities credit be used? (Section 6 of the Guidelines) (circle one)	<input checked="" type="radio"/> Yes	No	Need/nexus must be justified in study, and it must be supported by operating agency
Are additional trip reductions (internal trips, transit trips, etc.) proposed? (circle one)	<input checked="" type="radio"/> Yes	No	If Yes, please provide explanation on separate sheet.

Attach a map (or maps) showing the Study Area network with included intersections and links, estimated site trip distribution, and growth factors for through traffic.

SHA/DPW&T capital program improvements assumed:	NONE			
Other improvements assumed:				
Is Mitigation (Section 8 of the Guidelines) to be proffered? (circle one)	<input checked="" type="radio"/> Yes ROSS/BG		No	Note the locational criteria in Section 8, and please note the clarifications regarding Mitigation included in Section 8, Subsection E.
Is a cooperative funding arrangement (such as a SCRP, PPFIP, or some other pro rata) to be used? (circle one)	<input checked="" type="radio"/> Yes ROSS/BG		No	If Yes, please provide explanation on separate sheet, and note limitations in Section 8, Subsection E.
Will summer counts be used? (circle one)	Yes		<input checked="" type="radio"/> No	The use of summer counts must have specific concurrence of TPS staff.
Have there been discussions with the permitting agency (DPW&T and/or SHA) regarding access to this site and the analysis requirements? (circle one)	<input checked="" type="radio"/> Yes		No	Section 1, Subsection E strongly advises that these discussions occur early in the development review process. Note that driveway access onto arterial facilities must be justified and approved by the Planning Board as a part of the subdivision process.
Has a listing of background development been developed? (circle one)	Yes		<input checked="" type="radio"/> No NOT LISTED ON SOMETHING	If Yes, please provide the list so that TPS staff may either concur with it or provide changes.
Have the costs and feasibility of potential off-site transportation improvements been evaluated? (circle one)	Yes		<input checked="" type="radio"/> No	If No, bear in mind that Section 8, Subsection D requires that ANY recommended physical off-site improvements include an evaluation of feasibility.


SIGNED:

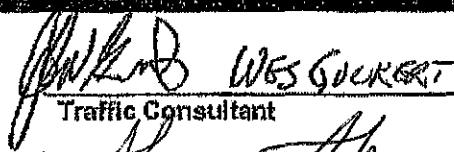
WES GOUKER
Traffic Consultant

5.4.16

Date

APPROVED:


TPS Coordinator (or Supervisor)

5/20/16

Date

This form is not required for sites that do not require a TIS.



THE MARYLAND-NATIONAL CAPITAL PARK AND PLANNING COMMISSION

Prince George's County Planning Department
Countywide Planning Division, Transportation Planning Section

(301) 952-3680
www.mncppc.org

Scoping Agreement Notes

Site: New Carrollton Station

Firm: The Traffic Group

I'll agree to the scope in general with the following comments/changes:

1. Based on the trip distribution provided, I would agree to the study area and the intersections under study.
2. Please note that links within the study area could become critical.
3. I would determine that the trip generation computations appear to have been done in general conformance with the "Transportation Review Guidelines, Part 1."
4. Notwithstanding the comment in 3 above, it is noted that a 30 percent credit for TOD has been assumed in the computations. While the credit is permissible to utilize in the study, the actual development will need to demonstrate strong conformance to the generally-accepted principles of transit-oriented development urban form. Be advised that the use of the credit will grant us leverage to require changes to plans or, in cases where plans cannot be amended to justify the credit, a revised traffic study using a lesser credit.
5. Please note that the study must conform to the new "Transportation Review Guidelines, Part 1."
6. Please remember that the feasibility of any recommendations must be reviewed, and if any recommendation will require the acquisition of property from a third party, the study must attest "that the applicant has or can obtain the necessary right-of-way."
7. Our submittal requirements have changed. Please note the guidance at the end of this document.
8. Provision of these written comments, dated January 28, 2013, by Thomas G. Masog, Planner Coordinator in the Transportation Planning Section of the Prince George's County Planning Department, shall be determined to constitute a signature approval of the final scoping. The initial Scoping Agreement plus these comments shall be included in the traffic study that is ultimately submitted in support of a development application. The Scoping Agreement combined with these comments shall be valid through January 28, 2014.


Traffic Studies: The primary means of submitting a TIS shall be an electronic file in Portable Document Format (PDF). Two hardcopies (one for the case file and one for the TPS staff person) plus a disc containing the electronic file will be provided to the Applications Section of the Development Review Division (DRD) for the official submittal. In submitting electronic files, the following shall be noted:

- Pictures and mapping should be readable, and need not be scanned or provided at the highest possible resolution. In many cases, 100 dots per inch (dpi) will be readable, and 300 dpi should generally be the maximum resolution used.
- The submitted file containing the report and the needed appendices must be 10 megabytes (MBs) or smaller in order to be sent electronically as an email attachment. Larger documents, items that are graphics-intensive, or large documents of a high resolution should consider strategies to make the document manageable, including the following:
 - Providing multiple files of 10 MBs or less each.
 - Providing either the file(s) or large figures within the study as a compressed (zip) file.

Both the hardcopies and the PDF must be received before acceptance review of a study can commence. All submittals of a TIS or other traffic data for the record must be made via DRD. Every TIS received by DRD staff is immediately logged and forwarded to TPS staff.

MIXED USE SITE PLAN

OFFICE, RETAIL, HOTEL & RESIDENTIAL

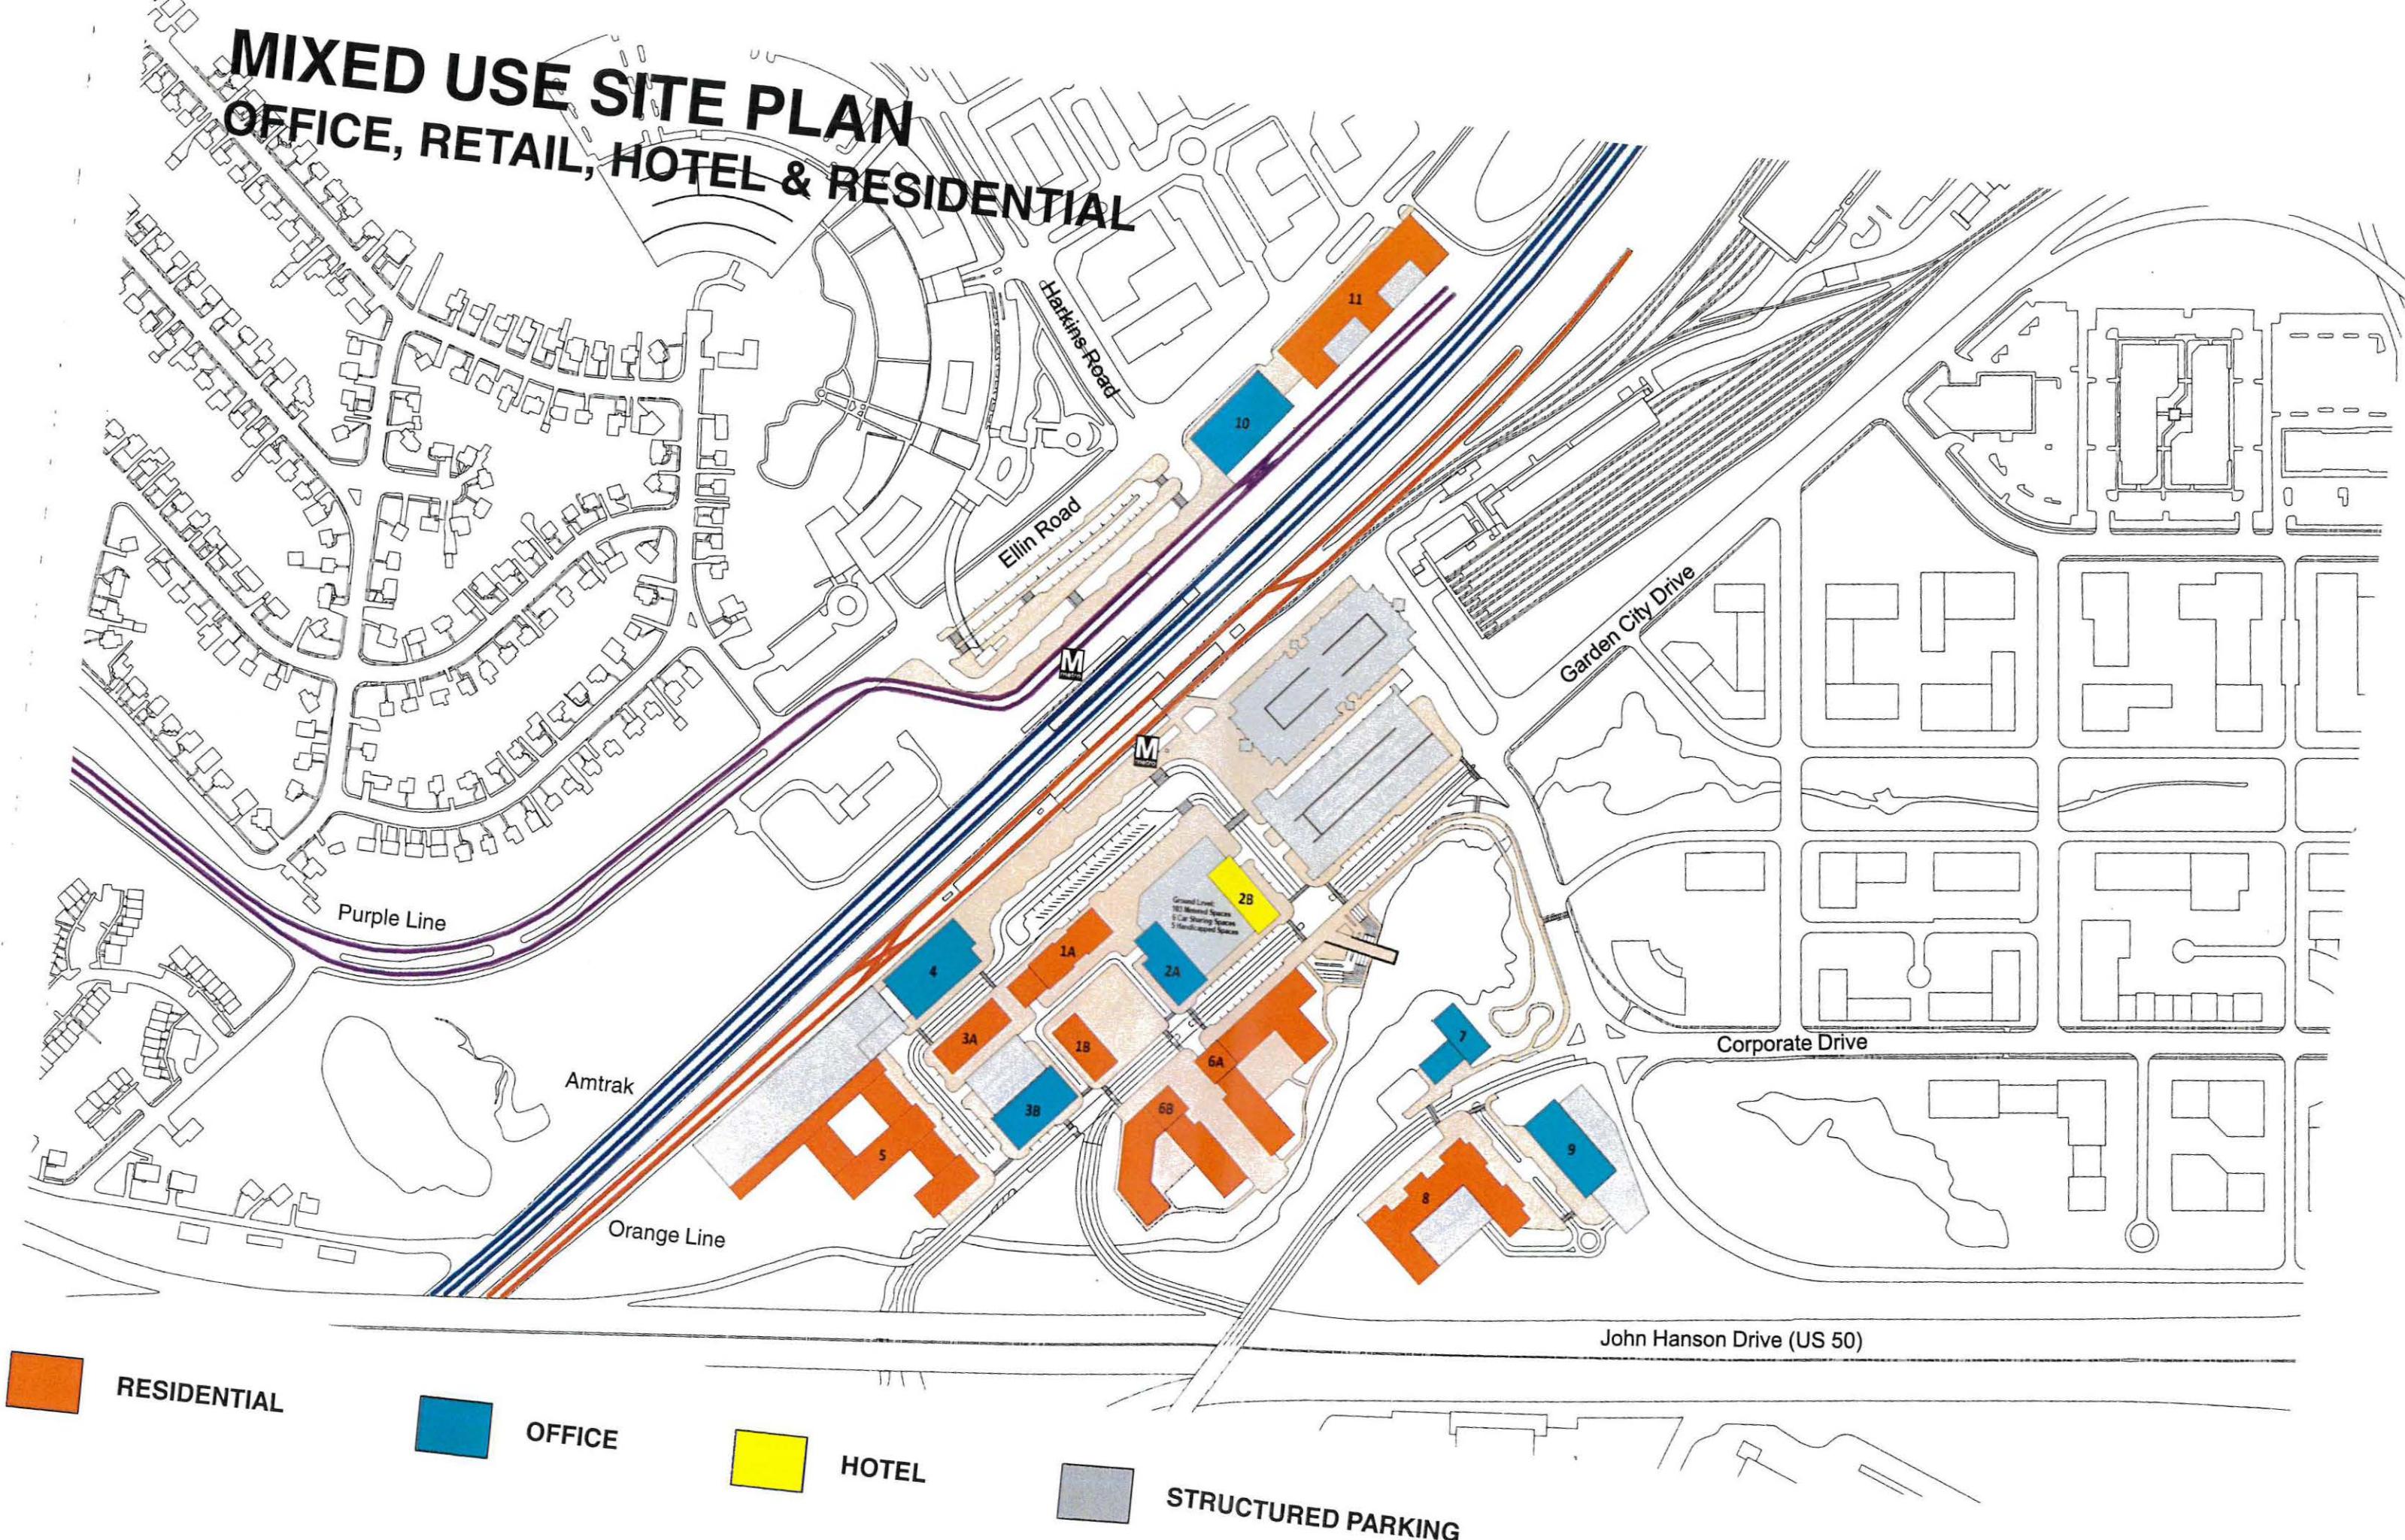

RESIDENTIAL


OFFICE

HOTEL

STRUCTURED PARKING

New Carrollton											
Component	Blocks	Deliver	Apartments		Office		Retail		Hotel		Parking
Phase 1:			# Units	SF	SF	SF	Keys	SF	Total SF	Spaces	SF
1	5	2017	250	250000		15,000			265,000	300	108,000
2	4	2018			255,000	20,000			275,000	600	108,000
	2B	2019				15,000	180	150,000	165,000	92	33,120
Phase 2:											
3	3A	2020	100	100,000		5,000			105,000	99	35,640
	3B	2024			100,000	5,000			105,000	200	72,000
4	2A	2020			150,000	20,000			170,000	568	204,480
5	1	2022	265	265,000	-	40,000			305,000	200	72,000
6	6	2023	370	370,000		15,000			385,000	200	72,000
7	7	2024			80,000				80,000	50	18,000
8	8	2025	140	140,000		-			140,000	200	72,000
9	9	2027			265,000	5,000			270,000	554	199,440
10	10	2026			275,000	5,000			280,000	554	199,440
11	11	2027	185	185,000	-	10,000			195,000	115	41,400
			1,310	1,310,000	1,125,000	155,000	180	150,000	2,740,000	3,732	1,235,520

VEHICULAR CIRCULATION

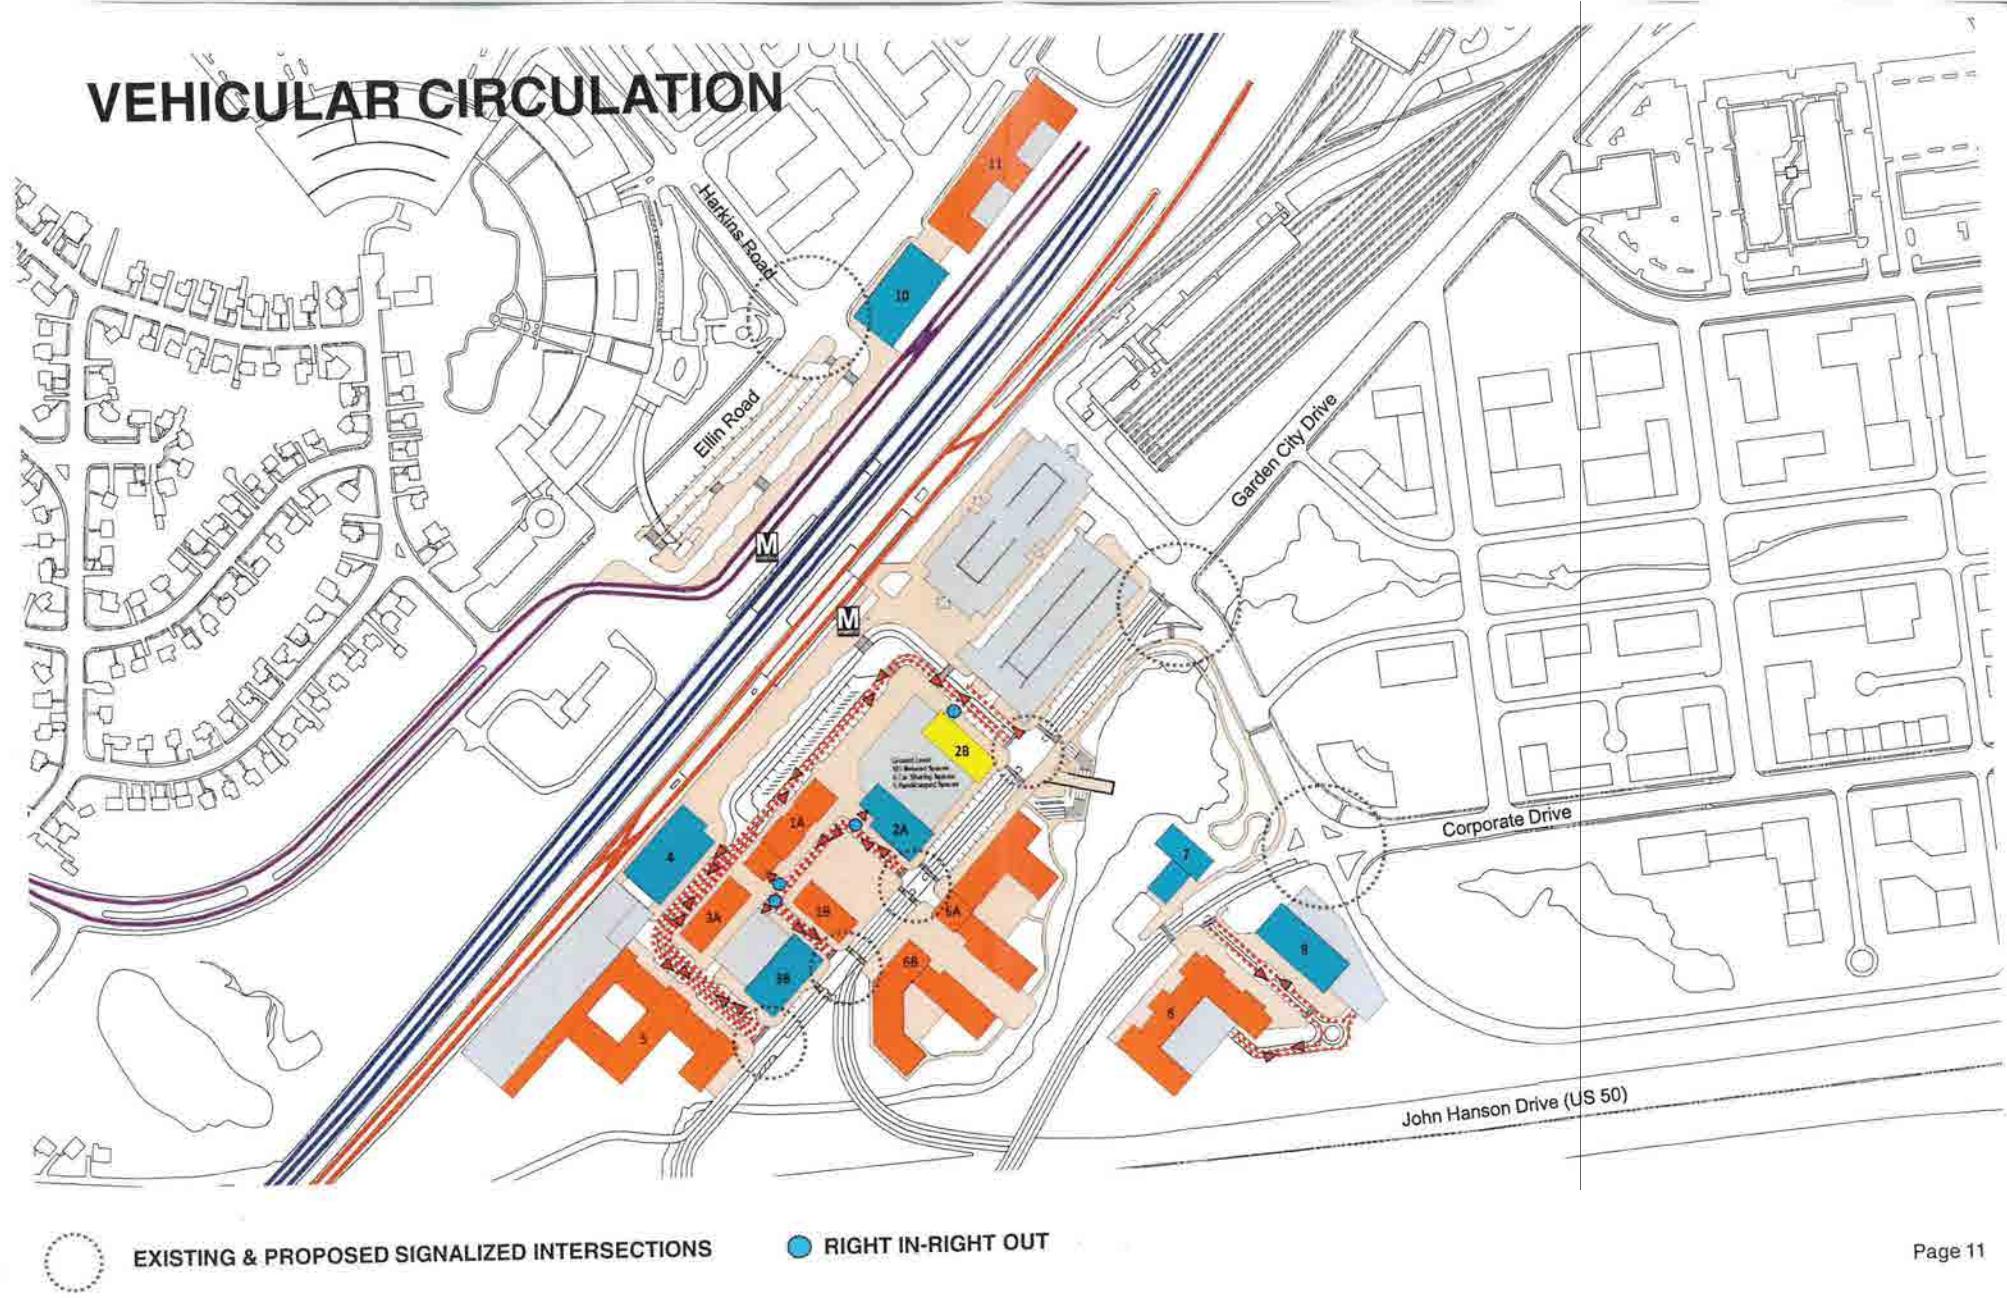

VEHICLES TURNING MOVEMENT COUNT - SUMMARY


Intersection of: US 50 Ramps

and: Garden City Drive

Location: Prince George's County, Maryland

Counted by: VCU

Date: June 01, 2016


Wednesday

Weather: Sunny/Warm

Entered by: SN

Star Rating: 5

TIME	TRAFFIC FROM NORTH					TRAFFIC FROM SOUTH					TRAFFIC FROM EAST					TRAFFIC FROM WEST					TOTAL N + S + E + W	
	on:		RIGHT	THRU	LEFT	U-TN	TOTAL	on:		RIGHT	THRU	LEFT	U-TN	TOTAL	on:		From US 50 Westbound	RIGHT	THRU	LEFT	U-TN	TOTAL
AM																						
6:30 - 6:45						0						0		8		8			144		144	152
6:45 - 7:00						0						0		3		3			147		147	150
7:00 - 7:15						0						0		4		4			173		173	177
7:15 - 7:30						0						0		13		13			177		177	190
7:30 - 7:45						0						0		4		4			153		153	157
7:45 - 8:00						0						0		4		4			170		170	174
8:00 - 8:15						0						0		5		5			150		150	155
8:15 - 8:30						0						0		2		2			126		126	128
8:30 - 8:45						0						0		7		7			131		131	138
8:45 - 9:00						0						0		4		4			89		89	93
9:00 - 9:15						0						0		4		4			84		84	88
9:15 - 9:30						0						0		10		10			49		49	59
3 Hr Totals	0	0	0	0	0	0	0	0	0	0	0	0	68	0	0	68	0	1593	0	0	1593	1661
1 Hr Totals																						
6:30 - 7:30	0	0	0	0	0	0	0	0	0	0	0	0	28	0	0	28	0	641	0	0	641	669
6:45 - 7:45	0	0	0	0	0	0	0	0	0	0	0	0	24	0	0	24	0	650	0	0	650	674
7:00 - 8:00	0	0	0	0	0	0	0	0	0	0	0	0	25	0	0	25	0	673	0	0	673	698
7:15 - 8:15	0	0	0	0	0	0	0	0	0	0	0	0	26	0	0	26	0	650	0	0	650	676
7:30 - 8:30	0	0	0	0	0	0	0	0	0	0	0	0	15	0	0	15	0	599	0	0	599	614
7:45 - 8:45	0	0	0	0	0	0	0	0	0	0	0	0	18	0	0	18	0	577	0	0	577	595
8:00 - 9:00	0	0	0	0	0	0	0	0	0	0	0	0	18	0	0	18	0	496	0	0	496	514
8:15 - 9:15	0	0	0	0	0	0	0	0	0	0	0	0	17	0	0	17	0	430	0	0	430	447
8:30 - 9:30	0	0	0	0	0	0	0	0	0	0	0	0	25	0	0	25	0	353	0	0	353	378
PEAK HOUR																						
7:00 - 8:00	0	0	0	0	0	0	0	0	0	0	0	0	25	0	0	25	0	673	0	0	673	698
PM																						
4:00 - 4:15						0						0		20		20		56		56	56	76
4:15 - 4:30						0						0		18		18		49		49	49	67
4:30 - 4:45						0						0		26		26		55		55	55	81
4:45 - 5:00						0						0		21		21		76		76	76	97
5:00 - 5:15						0						0		30		30		70		70	70	100
5:15 - 5:30						0						0		24		24		60		60	60	84
5:30 - 5:45						0						0		36		36		99		99	99	135
5:45 - 6:00						0						0		32		32		108		108	108	140
6:00 - 6:15						0						0		24		24		67		67	67	91
6:15 - 6:30						0						0		44		44		59		59	59	103
6:30 - 6:45						0						0		34		34		64		64	64	98
6:45 - 7:00						0						0		12		12		38		38	38	50
3 Hr Totals	0	0	0	0	0	0	0	0	0	0	0	0	321	0	0	321	0	801	0	0	801	1122
1 Hr Totals																						
4:00 - 5:00	0	0	0	0	0	0	0	0	0	0	0	0	85	0	0	85	0	236	0	0	236	321
4:15 - 5:15	0	0	0	0	0	0	0	0	0	0	0	0	95	0	0	95	0	250	0	0	250	345
4:30 - 5:30	0	0	0	0	0	0	0	0	0	0	0	0	101	0	0	101	0	261	0	0	261	362
4:45 - 5:45	0	0	0	0	0	0	0	0	0	0	0	0	111	0	0	111	0	305	0	0	305	416
5:00 - 6:00	0	0	0	0	0	0	0	0	0	0	0	0	122	0	0	122	0	337	0	0	337	459
5:15 - 6:15	0	0	0	0	0	0	0	0	0	0	0	0	116	0	0	116	0	334	0	0	334	450
5:30 - 6:30	0	0	0	0	0	0	0	0	0	0	0	0	136	0	0	136	0	333	0	0	333	469
5:45 - 6:45	0	0	0	0	0	0	0	0	0	0	0	0	134	0	0	134	0	298	0	0	298	432
6:00 - 7:00	0	0	0	0	0	0	0	0	0	0	0	0	114	0	0	114	0	228	0	0	228	342
PEAK HOUR																						
5:30 - 6:30	0	0	0	0	0	0	0	0	0	0	0	0	136	0	0	136	0	333	0	0	333	469

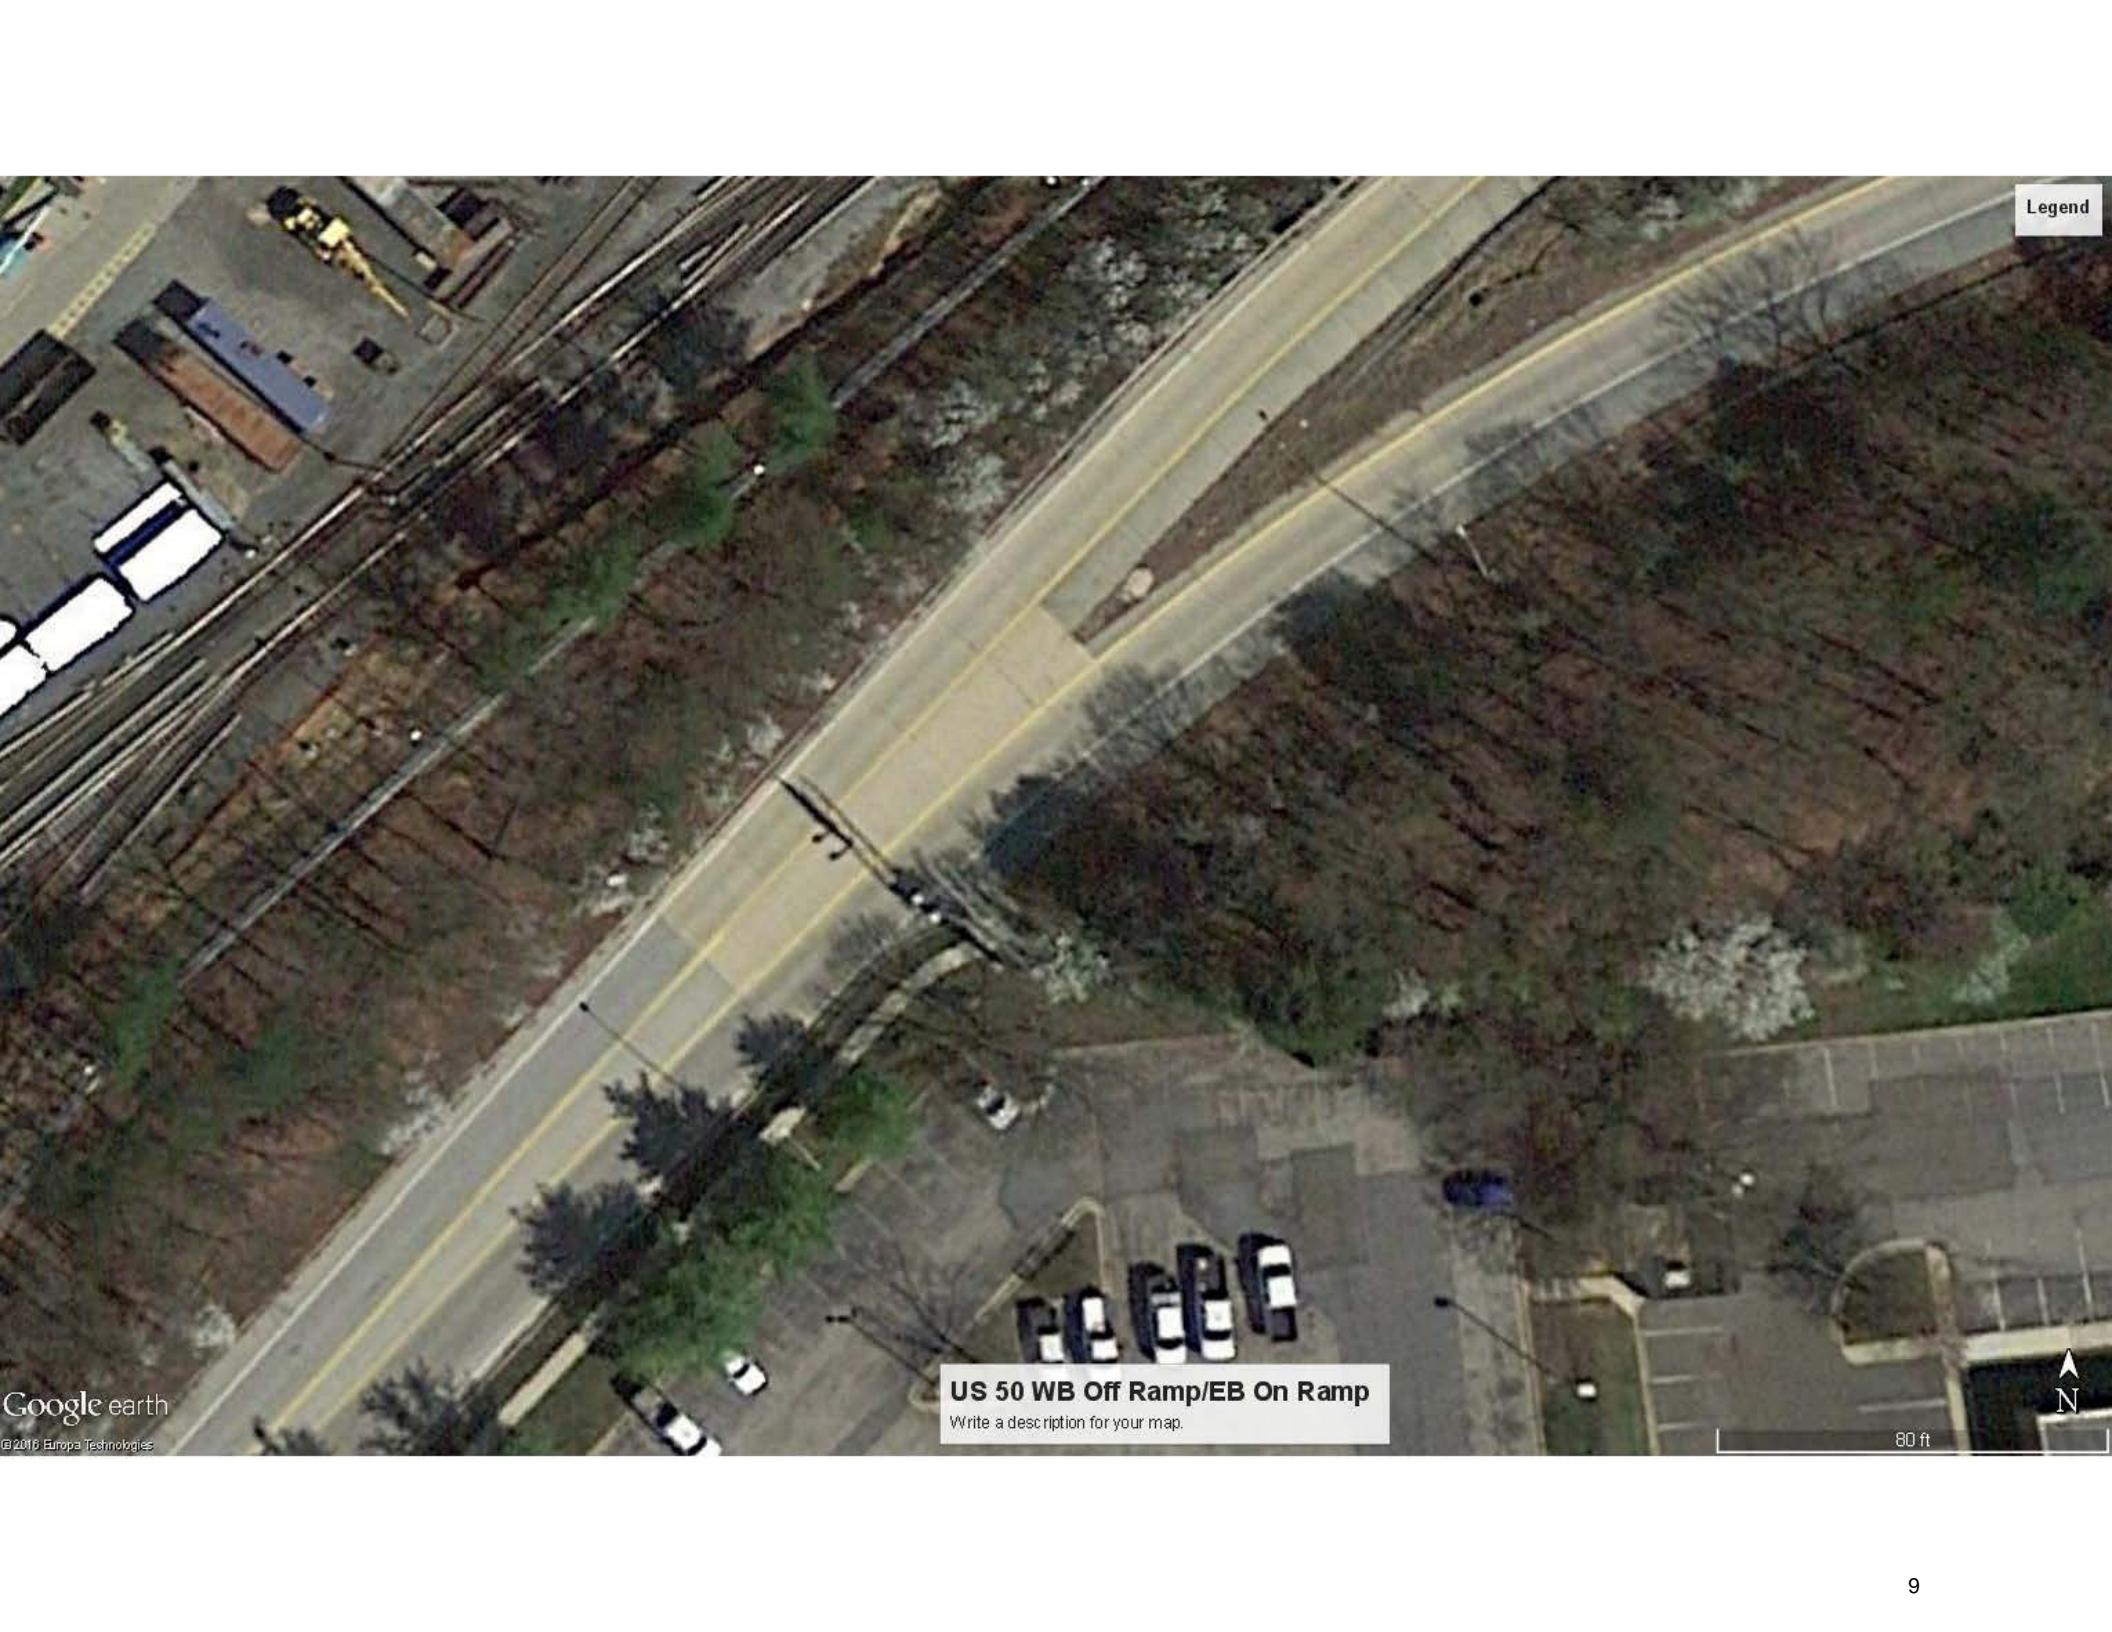

Legend

US 50 WB Off Ramp/EB On Ramp

Write a description for your map.

80 ft

Google earth

© 2016 Esri Technologies

N

VEHICLES TURNING MOVEMENT COUNT - SUMMARY

 Intersection of: Garden City Drive
 and: Corporate Drive

Location: Prince George's County, Maryland

Counted by: VCU

Date: May 12, 2016

Thursday

Weather: Cloudy/Cool

Entered by: AW

Star Rating: 3

TIME	TRAFFIC FROM NORTH on: Garden City Drive					TRAFFIC FROM SOUTH on: Garden City Drive					TRAFFIC FROM EAST on: Corporate Drive					TRAFFIC FROM WEST on: Corporate Drive					TOTAL N + S + E + W
	RIGHT	THRU	LEFT	U-TN	TOTAL	RIGHT	THRU	LEFT	U-TN	TOTAL	RIGHT	THRU	LEFT	U-TN	TOTAL	RIGHT	THRU	LEFT	U-TN	TOTAL	
AM																					
6:30 - 6:45	22	119	0	0	141	30	18	6	0	54	14	3	36	0	53	0	0	1	0	1	249
6:45 - 7:00	30	113	1	0	144	43	17	8	0	68	19	8	36	0	63	5	0	0	0	5	280
7:00 - 7:15	33	94	1	0	128	17	12	3	0	32	19	6	39	0	64	1	0	0	0	1	225
7:15 - 7:30	30	123	2	0	155	33	32	12	0	77	19	9	43	0	71	3	1	0	0	4	307
7:30 - 7:45	40	159	6	0	205	42	38	17	0	97	39	16	51	0	106	2	0	2	0	4	412
7:45 - 8:00	43	115	4	0	162	54	31	7	0	92	60	12	52	0	124	3	0	0	0	3	381
8:00 - 8:15	31	123	4	0	158	48	28	10	0	86	39	7	60	0	106	5	1	0	0	6	356
8:15 - 8:30	24	72	0	0	96	58	24	20	0	102	28	5	46	0	79	2	0	0	0	2	279
8:30 - 8:45	26	84	4	0	114	42	19	13	0	74	33	14	50	0	97	2	1	0	0	3	288
8:45 - 9:00	19	66	3	0	88	63	24	6	0	93	18	8	34	0	60	2	0	1	0	3	244
9:00 - 9:15	10	53	4	0	67	47	13	6	1	67	12	7	44	0	63	4	0	0	0	4	201
9:15 - 9:30	9	50	4	0	63	36	13	3	0	52	19	5	38	0	62	0	0	0	0	0	177
3 Hr Totals	317	1171	33	0	1521	513	269	111	1	894	319	100	529	0	948	29	3	4	0	36	3399
1 Hr Totals																					
6:30 - 7:30	115	449	4	0	568	123	79	29	0	231	71	26	154	0	251	9	1	1	0	11	1061
6:45 - 7:45	133	489	10	0	632	135	99	40	0	274	96	39	169	0	304	11	1	2	0	14	1224
7:00 - 8:00	146	491	13	0	650	146	113	39	0	298	137	43	185	0	365	9	1	2	0	12	1325
7:15 - 8:15	144	520	16	0	680	177	129	46	0	352	157	44	206	0	407	13	2	2	0	17	1456
7:30 - 8:30	138	469	14	0	621	202	121	54	0	377	166	40	209	0	415	12	1	2	0	15	1428
7:45 - 8:45	124	394	12	0	530	202	102	50	0	354	160	38	208	0	406	12	2	0	0	14	1304
8:00 - 9:00	100	345	11	0	456	211	95	49	0	355	118	34	190	0	342	11	2	1	0	14	1167
8:15 - 9:15	79	275	11	0	365	210	80	45	1	336	91	34	174	0	299	10	1	1	0	12	1012
8:30 - 9:30	64	253	15	0	332	188	69	28	1	286	82	34	166	0	282	8	1	1	0	10	910
PEAK HOUR																					
7:15 - 8:15	144	520	16	0	680	177	129	46	0	352	157	44	206	0	407	13	2	2	0	17	1456
PM																					
4:00 - 4:15	2	52	8	0	62	15	10	0	0	25	12	3	35	0	50	47	4	19	0	70	207
4:15 - 4:30	0	63	1	0	64	10	11	2	0	23	10	2	36	0	48	60	5	34	0	99	234
4:30 - 4:45	1	69	2	0	72	16	5	1	0	22	21	0	55	0	76	40	3	26	0	69	239
4:45 - 5:00	0	47	1	0	48	14	20	1	1	36	15	3	34	0	52	80	6	51	0	137	273
5:00 - 5:15	1	73	2	0	76	15	13	1	1	30	11	1	60	0	72	78	2	35	0	115	293
5:15 - 5:30	3	65	0	0	68	15	21	0	0	36	13	0	56	0	69	94	7	55	0	156	329
5:30 - 5:45	0	44	2	0	46	15	15	0	0	30	19	2	57	0	78	74	3	50	0	127	281
5:45 - 6:00	1	63	4	0	68	18	13	1	0	32	19	0	56	0	75	74	8	44	0	126	301
6:00 - 6:15	0	45	1	0	46	13	16	0	0	29	9	0	51	0	60	72	8	51	0	131	266
6:15 - 6:30	1	48	1	0	50	13	9	0	0	22	8	1	44	0	53	65	8	54	0	127	252
6:30 - 6:45	0	42	2	0	44	14	12	1	0	27	4	1	39	0	44	70	5	35	0	110	225
6:45 - 7:00	0	38	2	0	40	12	18	0	0	30	7	0	36	0	43	72	7	43	0	122	235
3 Hr Totals	9	649	26	0	684	170	163	7	2	342	148	13	559	0	720	826	66	497	0	1389	3135
1 Hr Totals																					
4:00 - 5:00	3	231	12	0	246	55	46	4	1	106	58	8	160	0	226	227	18	130	0	375	953
4:15 - 5:15	2	252	6	0	260	55	49	5	2	111	57	6	185	0	248	258	16	146	0	420	1039
4:30 - 5:30	5	254	5	0	264	60	59	3	2	124	60	4	205	0	269	292	18	167	0	477	1134
4:45 - 5:45	4	229	5	0	238	59	69	2	2	132	58	6	207	0	271	326	18	191	0	535	1176
5:00 - 6:00	5	245	8	0	258	63	62	2	1	128	62	3	229	0	294	320	20	184	0	524	1204
5:15 - 6:15	4	217	7	0	228	61	65	1	0	127	60	2	220	0	282	314	26	200	0	540	1177
5:30 - 6:30	2	200	8	0	210	59	53	1	0	113	55	3	208	0	266	285	27	199	0	511	1100
5:45 - 6:45	2	198	8	0	208	58	50	2	0	110	40	2	190	0	232	281	29	184	0	494	1044
6:00 - 7:00	1	173	6	0	180	52	55	1	0	108	28	2	170	0	200	279	28	183	0	490	978
PEAK HOUR																					
5:00 - 6:00	5	245	8	0	258	63	62	2	1	128	62	3	229	0	294	320	20	184	0	524	1204

An aerial photograph showing a road intersection. On the left, there is a large parking lot with several cars parked. A road with three lanes leads from the bottom left towards the center of the intersection. Another road with two lanes leads from the top left towards the center. The intersection has a roundabout on the right side. There is a small area of green grass and some trees in the center. To the right of the intersection, there is a large area of brown ground, possibly a construction site or a dry field. In the top right corner, there is a legend box with the word "Legend".

Legend


Garden City Dr & Corporate Dr

Write a description for your map.

VEHICLES TURNING MOVEMENT COUNT - SUMMARY

**Intersection of: Garden City Drive
and: Parking Access**
Location: Prince George's County, Maryland
Counted by: VCU
Date: May 12, 2016
Thursday
Weather: Cloudy/Cool
Entered by: AW
Star Rating: 5

TIME	TRAFFIC FROM NORTH on: Garden City Drive					TRAFFIC FROM SOUTH on: Garden City Drive					TRAFFIC FROM EAST on:					TRAFFIC FROM WEST on: Parking Access					TOTAL N + S + E + W
	RIGHT	THRU	LEFT	U-TN	TOTAL	RIGHT	THRU	LEFT	U-TN	TOTAL	RIGHT	THRU	LEFT	U-TN	TOTAL	RIGHT	THRU	LEFT	U-TN	TOTAL	
AM																					
6:30 - 6:45	108	49	0	157		53	60	0	113						0	0	0	0	0	270	
6:45 - 7:00	110	32	0	142		69	72	1	142						0	0	0	0	0	284	
7:00 - 7:15	101	39	0	140		35	73	0	108						0	0	0	0	0	248	
7:15 - 7:30	113	54	0	167		74	69	0	143						0	1	0	0	1	311	
7:30 - 7:45	150	50	0	200		105	77	1	183						0	0	0	0	0	383	
7:45 - 8:00	113	46	0	159		87	75	2	164						0	0	0	0	0	323	
8:00 - 8:15	113	62	0	175		88	83	1	172						0	0	0	0	0	347	
8:15 - 8:30	65	40	0	105		98	53	3	154						0	0	0	0	0	259	
8:30 - 8:45	75	57	0	132		76	56	2	134						0	0	0	0	0	266	
8:45 - 9:00	66	41	0	107		90	35	3	128						0	0	0	0	0	235	
9:00 - 9:15	59	45	0	104		63	25	0	88						0	0	0	0	0	192	
9:15 - 9:30	41	44	0	85		53	21	1	75						0	0	0	0	0	160	
3 Hr Totals	1114	559	0	0	1673	0	891	699	14	1604	0	0	0	0	0	1	0	0	0	1	3278
1 Hr Totals																					
6:30 - 7:30	432	174	0	0	606	0	231	274	1	506	0	0	0	0	0	1	0	0	0	1	1113
6:45 - 7:45	474	175	0	0	649	0	283	291	2	576	0	0	0	0	0	1	0	0	0	1	1226
7:00 - 8:00	477	189	0	0	666	0	301	294	3	598	0	0	0	0	0	1	0	0	0	1	1265
7:15 - 8:15	489	212	0	0	701	0	354	304	4	662	0	0	0	0	0	1	0	0	0	1	1364
7:30 - 8:30	441	198	0	0	639	0	378	288	7	673	0	0	0	0	0	0	0	0	0	0	1312
7:45 - 8:45	366	205	0	0	571	0	349	267	8	624	0	0	0	0	0	0	0	0	0	0	1195
8:00 - 9:00	319	200	0	0	519	0	352	227	9	588	0	0	0	0	0	0	0	0	0	0	1107
8:15 - 9:15	265	183	0	0	448	0	327	169	8	504	0	0	0	0	0	0	0	0	0	0	952
8:30 - 9:30	241	187	0	0	428	0	282	137	6	425	0	0	0	0	0	0	0	0	0	0	853
PEAK HOUR																					
7:15 - 8:15	489	212	0	0	701	0	354	304	4	662	0	0	0	0	0	1	0	0	0	1	1364
PM																					
4:00 - 4:15	34	97	0	131		26	8	1	35						0	0	0	0	0	0	166
4:15 - 4:30	38	118	0	156		23	12	2	37						0	0	0	0	0	0	193
4:30 - 4:45	55	106	0	161		24	16	1	41						0	0	0	0	0	0	202
4:45 - 5:00	34	123	0	157		38	21	1	60						0	0	0	0	0	0	217
5:00 - 5:15	56	165	0	221		28	18	2	48						0	0	0	0	0	0	269
5:15 - 5:30	55	156	0	211		37	17	2	56						0	0	0	0	0	0	267
5:30 - 5:45	50	138	0	188		33	14	1	48						0	0	0	0	0	0	236
5:45 - 6:00	57	124	0	181		34	16	0	50						0	0	0	0	0	0	231
6:00 - 6:15	54	126	0	180		30	18	1	49						0	0	0	0	0	0	229
6:15 - 6:30	55	98	0	153		18	16	1	35						0	0	0	0	0	0	188
6:30 - 6:45	46	108	0	154		28	19	2	49						0	0	0	0	0	0	203
6:45 - 7:00	45	101	0	146		32	22	2	56						0	0	0	0	0	0	202
3 Hr Totals	579	1460	0	0	2039	0	351	197	16	564	0	0	0	0	0	0	0	0	0	0	2603
1 Hr Totals																					
4:00 - 5:00	161	444	0	0	605	0	111	57	5	173	0	0	0	0	0	0	0	0	0	0	778
4:15 - 5:15	183	512	0	0	695	0	113	67	6	186	0	0	0	0	0	0	0	0	0	0	881
4:30 - 5:30	200	550	0	0	750	0	127	72	6	205	0	0	0	0	0	0	0	0	0	0	955
4:45 - 5:45	195	582	0	0	777	0	136	70	6	212	0	0	0	0	0	0	0	0	0	0	989
5:00 - 6:00	218	583	0	0	801	0	132	65	5	202	0	0	0	0	0	0	0	0	0	0	1003
5:15 - 6:15	216	544	0	0	760	0	134	65	4	203	0	0	0	0	0	0	0	0	0	0	963
5:30 - 6:30	216	486	0	0	702	0	115	64	3	182	0	0	0	0	0	0	0	0	0	0	884
5:45 - 6:45	212	456	0	0	668	0	110	69	4	183	0	0	0	0	0	0	0	0	0	0	851
6:00 - 7:00	200	433	0	0	633	0	108	75	6	189	0	0	0	0	0	0	0	0	0	0	822
PEAK HOUR																					
5:00 - 6:00	218	583	0	0	801	0	132	65	5	202	0	0	0	0	0	0	0	0	0	0	1003

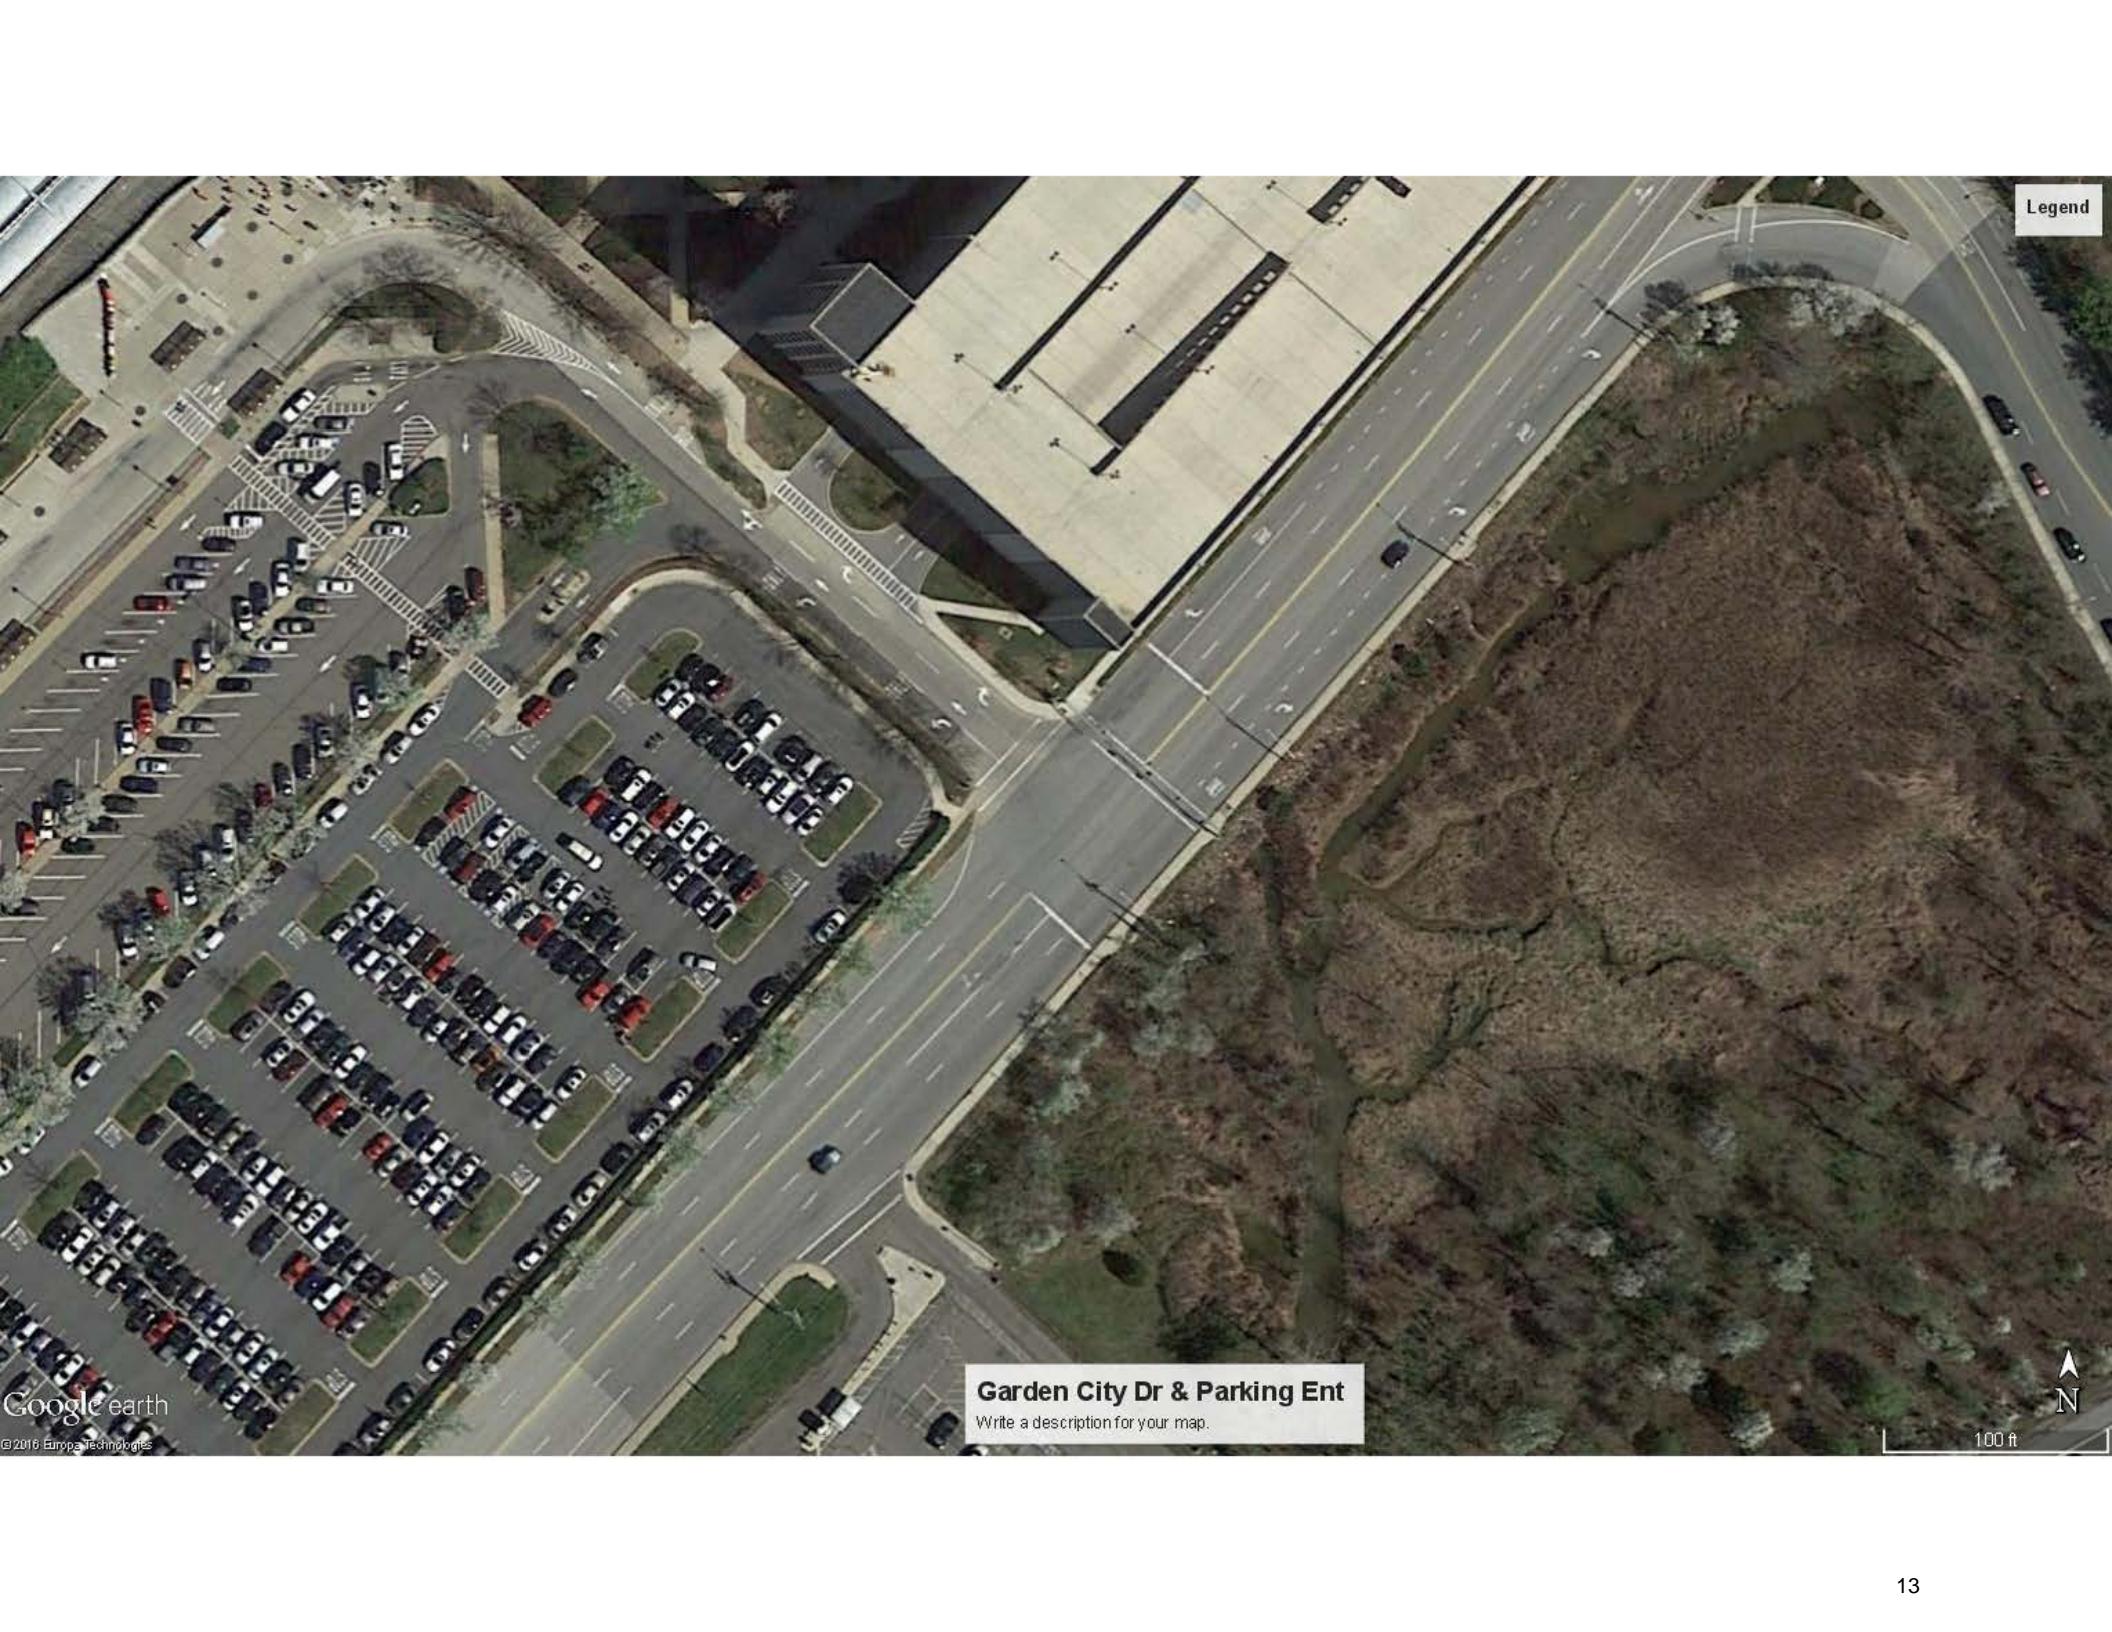

Legend

Garden City Dr & Parking Ent

Write a description for your map.

Google earth

© 2016 Esri Technologies

N

100 ft

VEHICLES TURNING MOVEMENT COUNT - SUMMARY

 Intersection of: Garden City Drive
 and: US 50 WB Off Ramp-Parking Access

Location: Prince George's County, Maryland

Counted by: VCU

Date: May 12, 2016

Thursday

Weather: Cloudy/Cool

Entered by: AW



Star Rating: 5

TIME	TRAFFIC FROM NORTH					TRAFFIC FROM SOUTH					TRAFFIC FROM EAST					TRAFFIC FROM WEST					TOTAL N + S + E + W
	on: Garden City Drive					on: Garden City Drive					on: US 50 WB Off Ramp					on: Parking Access					
	RIGHT	THRU	LEFT	U-TN	TOTAL	RIGHT	THRU	LEFT	U-TN	TOTAL	RIGHT	THRU	LEFT	U-TN	TOTAL	RIGHT	THRU	LEFT	U-TN	TOTAL	
AM																					
6:30 - 6:45	0	44	0	0	44	0	0	0	0	0	117	0	3	0	120	32	0	6	0	38	202
6:45 - 7:00	0	34	0	0	34	0	0	0	0	0	146	0	5	0	151	46	0	10	0	56	241
7:00 - 7:15	0	32	0	0	32	0	0	0	0	0	116	0	1	0	117	55	0	5	0	60	209
7:15 - 7:30	0	45	0	0	45	1	0	0	0	1	156	0	3	0	159	50	0	6	0	56	261
7:30 - 7:45	0	53	0	0	53	0	0	0	0	0	180	0	3	0	183	58	0	14	0	72	308
7:45 - 8:00	0	52	0	0	52	0	0	0	0	0	171	0	1	0	172	64	0	11	0	75	299
8:00 - 8:15	0	65	0	0	65	0	0	0	0	0	180	0	0	0	180	60	0	11	0	71	316
8:15 - 8:30	0	44	0	0	44	0	0	0	0	0	154	0	3	0	157	59	0	12	0	71	272
8:30 - 8:45	0	54	0	0	54	0	0	0	0	0	142	0	0	0	142	58	0	9	0	67	263
8:45 - 9:00	0	42	0	0	42	0	0	0	0	0	120	0	3	0	123	34	0	11	0	45	210
9:00 - 9:15	0	42	0	0	42	0	0	0	0	0	83	0	4	0	87	40	0	13	0	53	182
9:15 - 9:30	0	41	0	0	41	0	0	0	0	0	75	0	0	0	75	28	0	6	0	34	150
3 Hr Totals	0	548	0	0	548	1	0	0	0	1	1640	0	26	0	1666	584	0	114	0	698	2913
1 Hr Totals																					
6:30 - 7:30	0	155	0	0	155	1	0	0	0	1	535	0	12	0	547	183	0	27	0	210	913
6:45 - 7:45	0	164	0	0	164	1	0	0	0	1	598	0	12	0	610	209	0	35	0	244	1019
7:00 - 8:00	0	182	0	0	182	1	0	0	0	1	623	0	8	0	631	227	0	36	0	263	1077
7:15 - 8:15	0	215	0	0	215	1	0	0	0	1	687	0	7	0	694	232	0	42	0	274	1184
7:30 - 8:30	0	214	0	0	214	0	0	0	0	0	685	0	7	0	692	241	0	48	0	289	1195
7:45 - 8:45	0	215	0	0	215	0	0	0	0	0	647	0	4	0	651	241	0	43	0	284	1150
8:00 - 9:00	0	205	0	0	205	0	0	0	0	0	596	0	6	0	602	211	0	43	0	254	1061
8:15 - 9:15	0	182	0	0	182	0	0	0	0	0	499	0	10	0	509	191	0	45	0	236	927
8:30 - 9:30	0	179	0	0	179	0	0	0	0	0	420	0	7	0	427	160	0	39	0	199	805
PEAK HOUR																					
7:30 - 8:30	0	214	0	0	214	0	0	0	0	0	685	0	7	0	692	241	0	48	0	289	1195
PM																					
4:00 - 4:15	0	105	0	0	105	0	0	0	0	0	22	0	1	0	23	64	0	10	0	74	202
4:15 - 4:30	0	139	0	0	139	0	0	0	0	0	33	0	0	0	33	75	0	7	0	82	254
4:30 - 4:45	0	116	0	0	116	0	0	0	0	0	34	0	0	0	34	56	0	8	0	64	214
4:45 - 5:00	0	132	0	0	132	0	0	0	0	0	36	0	2	0	38	79	0	13	0	92	262
5:00 - 5:15	0	173	0	0	173	0	0	0	0	0	33	0	0	0	33	73	0	11	0	84	290
5:15 - 5:30	0	167	0	0	167	0	0	0	1	1	28	0	1	0	29	82	0	17	0	99	296
5:30 - 5:45	0	150	0	0	150	0	0	0	0	0	36	0	0	0	36	70	0	9	0	79	265
5:45 - 6:00	0	137	0	0	137	0	0	0	1	1	31	0	1	0	32	64	0	16	0	80	250
6:00 - 6:15	0	137	0	0	137	0	0	0	0	0	33	0	0	0	33	74	0	13	0	87	257
6:15 - 6:30	0	113	0	0	113	0	0	0	0	0	25	0	0	0	25	59	0	8	0	67	205
6:30 - 6:45	0	117	0	0	117	0	0	0	0	0	33	0	0	0	33	65	0	12	0	77	227
6:45 - 7:00	0	110	0	0	110	0	0	0	0	0	35	0	0	0	35	74	0	17	0	91	236
3 Hr Totals	0	1596	0	0	1596	0	0	0	2	2	379	0	5	0	384	835	0	141	0	976	2958
1 Hr Totals																					
4:00 - 5:00	0	492	0	0	492	0	0	0	0	0	125	0	3	0	128	274	0	38	0	312	932
4:15 - 5:15	0	560	0	0	560	0	0	0	0	0	136	0	2	0	138	283	0	39	0	322	1020
4:30 - 5:30	0	588	0	0	588	0	0	0	1	1	131	0	3	0	134	290	0	49	0	339	1062
4:45 - 5:45	0	622	0	0	622	0	0	0	1	1	133	0	3	0	136	304	0	50	0	354	1113
5:00 - 6:00	0	627	0	0	627	0	0	0	2	2	128	0	2	0	130	289	0	53	0	342	1101
5:15 - 6:15	0	591	0	0	591	0	0	0	2	2	128	0	2	0	130	290	0	55	0	345	1068
5:30 - 6:30	0	537	0	0	537	0	0	0	1	1	125	0	1	0	126	267	0	46	0	313	977
5:45 - 6:45	0	504	0	0	504	0	0	0	1	1	122	0	1	0	123	262	0	49	0	311	939
6:00 - 7:00	0	477	0	0	477	0	0	0	0	0	126	0	0	0	126	272	0	50	0	322	925
PEAK HOUR																					
4:45 - 5:45	0	622	0	0	622	0	0	0	1	1	133	0	3	0	136	304	0	50	0	354	1113

An aerial satellite photograph showing a highway interchange. On the left, there is a large parking lot filled with cars, connected by a network of white lines. A multi-lane highway curves from the bottom left towards the top right. Several cars are visible on the highway. To the right of the highway is another large parking lot, also filled with cars. The surrounding area includes some greenery and a few small buildings. A legend box is located in the top right corner, and a north arrow is in the bottom right corner.

Legend

Garden City Dr & US 50 WB Off Ramp

Write a description for your map.

VEHICLES TURNING MOVEMENT COUNT - SUMMARY


Intersection of: Garden City Drive

Counted by: VCU

Date: May 12, 2016

Thursday

and: US 50 EB/WB on Ramp

Weather: Cloudy/Cool

Location: Prince George's, Maryland

Entered by: RH

Star Rating: 5

TIME	TRAFFIC FROM NORTH					TRAFFIC FROM SOUTH					TRAFFIC FROM EAST					TRAFFIC FROM WEST					TOTAL N + S + E + W
	on: Garden City Drive					on: Garden City Drive					on:					on:					
	RIGHT	THRU	LEFT	U-TN	TOTAL	RIGHT	THRU	LEFT	U-TN	TOTAL	RIGHT	THRU	LEFT	U-TN	TOTAL	RIGHT	THRU	LEFT	U-TN	TOTAL	
AM																					
6:30 - 6:45	9		63	0	72					0										0	72
6:45 - 7:00	14		62	0	76					0										0	76
7:00 - 7:15	15		62	0	77					0										0	77
7:15 - 7:30	11		64	0	75					0										0	75
7:30 - 7:45	17		88	0	105					0										0	105
7:45 - 8:00	15		87	0	102					0										0	102
8:00 - 8:15	16		78	0	94					0										0	94
8:15 - 8:30	17		73	0	90					0										0	90
8:30 - 8:45	18		59	0	77					0										0	77
8:45 - 9:00	19		46	0	65					0										0	65
9:00 - 9:15	16		52	0	68					0										0	68
9:15 - 9:30	11		51	0	62					0										0	62
3 Hr Totals	178	0	785	0	963	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	963
1 Hr Totals																					
6:30 - 7:30	49	0	251	0	300	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	300
6:45 - 7:45	57	0	276	0	333	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	333
7:00 - 8:00	58	0	301	0	359	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	359
7:15 - 8:15	59	0	317	0	376	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	376
7:30 - 8:30	65	0	326	0	391	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	391
7:45 - 8:45	66	0	297	0	363	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	363
8:00 - 9:00	70	0	256	0	326	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	326
8:15 - 9:15	70	0	230	0	300	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	300
8:30 - 9:30	64	0	208	0	272	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	272
PEAK HOUR																					
7:30 - 8:30	65	0	326	0	391	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	391
PM																					
4:00 - 4:15	29		134	0	163					0										0	163
4:15 - 4:30	28		191	0	219					0										0	219
4:30 - 4:45	32		141	0	173					0										0	173
4:45 - 5:00	27		191	0	218					0										0	218
5:00 - 5:15	47		200	0	247					0										0	247
5:15 - 5:30	36		220	0	256					0										0	256
5:30 - 5:45	39		180	0	219					0										0	219
5:45 - 6:00	43		160	0	203					0										0	203
6:00 - 6:15	31		176	0	207					0										0	207
6:15 - 6:30	37		144	0	181					0										0	181
6:30 - 6:45	26		156	0	182					0										0	182
6:45 - 7:00	19		177	0	196					0										0	196
3 Hr Totals	394	0	2070	0	2464	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	2464
1 Hr Totals																					
4:00 - 5:00	116	0	657	0	773	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	773
4:15 - 5:15	134	0	723	0	857	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	857
4:30 - 5:30	142	0	752	0	894	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	894
4:45 - 5:45	149	0	791	0	940	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	940
5:00 - 6:00	165	0	760	0	925	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	925
5:15 - 6:15	149	0	736	0	885	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	885
5:30 - 6:30	150	0	660	0	810	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	810
5:45 - 6:45	137	0	636	0	773	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	773
6:00 - 7:00	113	0	653	0	766	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	766
PEAK HOUR																					
4:45 - 5:45	149	0	791	0	940	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	940



Garden City Dr to US 50 EB & WB Ramps

VEHICLES TURNING MOVEMENT COUNT - SUMMARY

 Intersection of: Garden City Drive
 and: US 50 Eastbound Ramp
 Location: Prince George's County, Maryland

Counted by: VCU

Date: May 19, 2016

Thursday



Weather: Sunny/Warm

Entered by: AW

Star Rating: 4

TIME	TRAFFIC FROM NORTH					TRAFFIC FROM SOUTH					TRAFFIC FROM EAST					TRAFFIC FROM WEST					TOTAL N + S + E + W	
	on: Garden City Drive					on: Garden City Drive					on: US 50 EB On Ramp					on: Metro Supply Facility						
	RIGHT	THRU	LEFT	U-TN	TOTAL	RIGHT	THRU	LEFT	U-TN	TOTAL	RIGHT	THRU	LEFT	U-TN	TOTAL	RIGHT	THRU	LEFT	U-TN	TOTAL		
AM																						
6:30 - 6:45	6	24	33	0	63	55	0	0	0	55						0	9	0	0	0	9	127
6:45 - 7:00	4	19	35	0	58	44	0	0	0	44						0	2	0	0	0	2	104
7:00 - 7:15	3	23	45	0	71	58	0	0	0	58						0	1	0	0	0	1	130
7:15 - 7:30	3	30	51	0	84	76	0	0	0	76						0	2	0	0	0	2	162
7:30 - 7:45	5	25	51	0	81	71	0	0	0	71						0	2	0	0	0	2	154
7:45 - 8:00	5	21	56	0	82	73	0	0	0	73						0	6	0	0	0	6	161
8:00 - 8:15	7	32	40	0	79	57	0	0	0	57						0	4	0	0	0	4	140
8:15 - 8:30	3	22	43	0	68	59	0	0	0	59						0	3	0	0	0	3	130
8:30 - 8:45	4	18	27	0	49	61	0	0	0	61						0	4	0	0	0	4	114
8:45 - 9:00	4	13	33	0	50	74	0	0	0	74						0	4	0	0	0	4	128
9:00 - 9:15	3	19	39	0	61	116	0	1	0	117						0	2	0	0	0	2	180
9:15 - 9:30	2	15	33	0	50	113	0	0	0	113						0	2	0	0	0	2	165
3 Hr Totals	49	261	486	0	796	857	0	1	0	858	0	0	0	0	0	41	0	0	0	41	1695	
1 Hr Totals																						
6:30 - 7:30	16	96	164	0	276	233	0	0	0	233	0	0	0	0	0	14	0	0	0	0	14	523
6:45 - 7:45	15	97	182	0	294	249	0	0	0	249	0	0	0	0	0	7	0	0	0	0	7	550
7:00 - 8:00	16	99	203	0	318	278	0	0	0	278	0	0	0	0	0	11	0	0	0	0	11	607
7:15 - 8:15	20	108	198	0	326	277	0	0	0	277	0	0	0	0	0	14	0	0	0	0	14	617
7:30 - 8:30	20	100	190	0	310	260	0	0	0	260	0	0	0	0	0	15	0	0	0	0	15	585
7:45 - 8:45	19	93	166	0	278	250	0	0	0	250	0	0	0	0	0	17	0	0	0	0	17	545
8:00 - 9:00	18	85	143	0	246	251	0	0	0	251	0	0	0	0	0	15	0	0	0	0	15	512
8:15 - 9:15	14	72	142	0	228	310	0	1	0	311	0	0	0	0	0	13	0	0	0	0	13	552
8:30 - 9:30	13	65	132	0	210	364	0	1	0	365	0	0	0	0	0	12	0	0	0	0	12	587
PEAK HOUR																						
7:15 - 8:15	20	108	198	0	326	277	0	0	0	277	0	0	0	0	0	14	0	0	0	14	617	
PM																						
4:00 - 4:15	3	23	115	0	141	141	0	0	0	141						0	5	0	0	0	5	287
4:15 - 4:30	1	28	126	0	155	104	0	0	0	104						0	3	0	0	0	3	262
4:30 - 4:45	1	33	147	0	181	140	0	0	0	140						0	6	0	0	0	6	327
4:45 - 5:00	2	30	144	0	176	93	0	0	0	93						0	3	0	0	0	3	272
5:00 - 5:15	2	23	154	0	179	156	0	0	0	156						0	5	0	0	0	5	340
5:15 - 5:30	3	45	197	0	245	123	0	0	0	123						0	3	0	0	0	3	371
5:30 - 5:45	1	26	142	0	169	116	0	0	0	116						0	5	0	0	0	5	290
5:45 - 6:00	1	29	181	0	211	96	0	0	0	96						0	2	0	0	0	2	309
6:00 - 6:15	2	23	131	0	156	99	0	0	0	99						0	1	0	0	0	1	256
6:15 - 6:30	0	36	174	0	210	83	0	0	0	83						0	2	0	0	0	2	295
6:30 - 6:45	0	27	184	0	211	74	0	0	0	74						0	0	0	0	0	0	285
6:45 - 7:00	0	32	120	0	152	86	0	0	0	86						0	0	0	0	0	0	238
3 Hr Totals	16	355	1815	0	2186	1311	0	0	0	1311	0	0	0	0	0	35	0	0	0	35	3532	
1 Hr Totals																						
4:00 - 5:00	7	114	532	0	653	478	0	0	0	478	0	0	0	0	0	17	0	0	0	0	17	1148
4:15 - 5:15	6	114	571	0	691	493	0	0	0	493	0	0	0	0	0	17	0	0	0	0	17	1201
4:30 - 5:30	8	131	642	0	781	512	0	0	0	512	0	0	0	0	0	17	0	0	0	0	17	1310
4:45 - 5:45	8	124	637	0	769	488	0	0	0	488	0	0	0	0	0	16	0	0	0	0	16	1273
5:00 - 6:00	7	123	674	0	804	491	0	0	0	491	0	0	0	0	0	15	0	0	0	0	15	1310
5:15 - 6:15	7	123	651	0	781	434	0	0	0	434	0	0	0	0	0	11	0	0	0	0	11	1226
5:30 - 6:30	4	114	628	0	746	394	0	0	0	394	0	0	0	0	0	10	0	0	0	0	10	1150
5:45 - 6:45	3	115	670	0	788	352	0	0	0	352	0	0	0	0	0	5	0	0	0	0	5	1145
6:00 - 7:00	2	118	609	0	729	342	0	0	0	342	0	0	0	0	0	3	0	0	0	0	3	1074
PEAK HOUR																						
5:00 - 6:00	7	123	674	0	804	491	0	0	0	491	0	0	0	0	0	15	0	0	0	15	1310	



Ardwick Ardmore Rd & Parking/US 50 EB On Ramp

Write a description for your map.

Legend

N

100 ft

VEHICLES TURNING MOVEMENT COUNT - SUMMARY

Counted by: VCU

Date: May 19, 2016

Thursday

Intersection of: Pennsy Drive

Weather: Sunny/Warm




and: Ardwick Ardmore Road

Location: Prince George's County, Maryland

Entered by: AW

Star Rating: 5

TIME	TRAFFIC FROM NORTH					TRAFFIC FROM SOUTH					TRAFFIC FROM EAST					TRAFFIC FROM WEST					TOTAL N + S + E + W
	on: Pennsy Drive					on: Pennsy Drive					on: Ardwick Ardmore Road					on: Ardwick Ardmore Road					
	RIGHT	THRU	LEFT	U-TN	TOTAL	RIGHT	THRU	LEFT	U-TN	TOTAL	RIGHT	THRU	LEFT	U-TN	TOTAL	RIGHT	THRU	LEFT	U-TN	TOTAL	
AM																					
6:30 - 6:45	5	36	46	0	87	39	14	19	0	72	18	25	48	0	91	13	15	0	6	34	284
6:45 - 7:00	5	27	56	0	88	50	20	10	0	80	31	31	72	0	134	13	5	1	0	19	321
7:00 - 7:15	7	34	45	0	86	62	26	16	0	104	29	32	72	0	133	8	14	0	0	22	345
7:15 - 7:30	3	30	51	0	84	86	36	25	0	147	43	52	58	0	153	9	25	0	0	34	418
7:30 - 7:45	4	15	37	0	56	55	30	18	0	103	47	50	106	0	203	11	15	0	0	26	388
7:45 - 8:00	8	22	62	0	92	75	65	14	0	154	43	49	98	0	190	8	13	2	1	24	460
8:00 - 8:15	9	17	55	0	81	68	42	15	0	125	48	31	87	0	166	12	21	1	1	35	407
8:15 - 8:30	4	34	58	0	96	69	46	18	0	133	31	38	75	0	144	11	15	0	0	26	399
8:30 - 8:45	4	20	43	0	67	65	48	14	0	127	28	42	95	0	165	7	11	0	1	19	378
8:45 - 9:00	7	19	42	0	68	66	64	13	0	143	38	52	94	0	184	5	12	0	1	18	413
9:00 - 9:15	15	12	40	0	67	52	62	18	0	132	22	82	95	0	199	9	10	1	0	20	418
9:15 - 9:30	14	19	34	0	67	53	34	16	0	103	24	83	74	0	181	8	10	0	0	18	369
3 Hr Totals	85	285	569	0	939	740	487	196	0	1423	402	567	974	0	1943	114	166	5	10	295	4600
1 Hr Totals																					
6:30 - 7:30	20	127	198	0	345	237	96	70	0	403	121	140	250	0	511	43	59	1	6	109	1368
6:45 - 7:45	19	106	189	0	314	253	112	69	0	434	150	165	308	0	623	41	59	1	0	101	1472
7:00 - 8:00	22	101	195	0	318	278	157	73	0	508	162	183	334	0	679	36	67	2	1	106	1611
7:15 - 8:15	24	84	205	0	313	284	173	72	0	529	181	182	349	0	712	40	74	3	2	119	1673
7:30 - 8:30	25	88	212	0	325	267	183	65	0	515	169	168	366	0	703	42	64	3	2	111	1654
7:45 - 8:45	25	93	218	0	336	277	201	61	0	539	150	160	355	0	665	38	60	3	3	104	1644
8:00 - 9:00	24	90	198	0	312	268	200	60	0	528	145	163	351	0	659	35	59	1	3	98	1597
8:15 - 9:15	30	85	183	0	298	252	220	63	0	535	119	214	359	0	692	32	48	1	2	83	1608
8:30 - 9:30	40	70	159	0	269	236	208	61	0	505	112	259	358	0	729	29	43	1	2	75	1578
PEAK HOUR																					
7:15 - 8:15	24	84	205	0	313	284	173	72	0	529	181	182	349	0	712	40	74	3	2	119	1673
PM																					
4:00 - 4:15	55	11	57	0	123	106	24	32	0	162	22	52	66	0	140	3	19	0	2	24	449
4:15 - 4:30	37	15	46	0	98	106	14	17	0	137	16	47	75	0	138	5	24	0	1	30	403
4:30 - 4:45	71	9	60	0	140	119	22	29	0	170	14	34	67	0	115	8	28	0	2	38	463
4:45 - 5:00	34	14	55	0	103	95	22	21	0	138	17	33	63	0	113	9	22	0	2	33	387
5:00 - 5:15	71	20	52	0	143	144	32	31	0	207	19	55	77	0	151	7	17	0	0	24	525
5:15 - 5:30	54	11	50	0	115	156	17	28	0	201	28	39	76	0	143	7	41	0	1	49	508
5:30 - 5:45	65	10	48	0	123	122	22	21	0	165	17	29	84	0	130	5	24	0	1	30	448
5:45 - 6:00	36	9	55	0	100	131	23	22	0	176	19	37	67	0	123	5	24	1	0	30	429
6:00 - 6:15	44	16	49	0	109	119	20	21	0	160	23	38	59	0	120	2	21	0	0	23	412
6:15 - 6:30	36	12	35	0	83	115	14	16	0	145	18	28	77	0	123	3	31	0	1	35	386
6:30 - 6:45	31	9	45	0	85	124	14	14	0	152	20	34	62	0	116	1	27	0	0	28	381
6:45 - 7:00	29	10	33	0	72	101	12	17	0	130	20	37	52	0	109	5	27	0	1	33	344
3 Hr Totals	563	146	585	0	1294	1438	236	269	0	1943	233	463	825	0	1521	60	305	1	11	377	5135
1 Hr Totals																					
4:00 - 5:00	197	49	218	0	464	426	82	99	0	607	69	166	271	0	506	25	93	0	7	125	1702
4:15 - 5:15	213	58	213	0	484	464	90	98	0	652	66	169	282	0	517	29	91	0	5	125	1778
4:30 - 5:30	230	54	217	0	501	514	93	109	0	716	78	161	283	0	522	31	108	0	5	144	1883
4:45 - 5:45	224	55	205	0	484	517	93	101	0	711	81	156	300	0	537	28	104	0	4	136	1868
5:00 - 6:00	226	50	205	0	481	553	94	102	0	749	83	160	304	0	547	24	106	1	2	133	1910
5:15 - 6:15	199	46	202	0	447	528	82	92	0	702	87	143	286	0	516	19	110	1	2	132	1797
5:30 - 6:30	181	47	187	0	415	487	79	80	0	646	77	132	287	0	496	15	100	1	2	118	1675
5:45 - 6:45	147	46	184	0	377	489	71	73	0	633	80	137	265	0	482	11	103	1	1	116	1608
6:00 - 7:00	140	47	162	0	349	459	60	68	0	587	81	137	250	0	468	11	106	0	2	119	1523
PEAK HOUR																					
5:00 - 6:00	226	50	205	0	481	553	94	102	0	749	83	160	304	0	547	24	106	1	2	133	1910

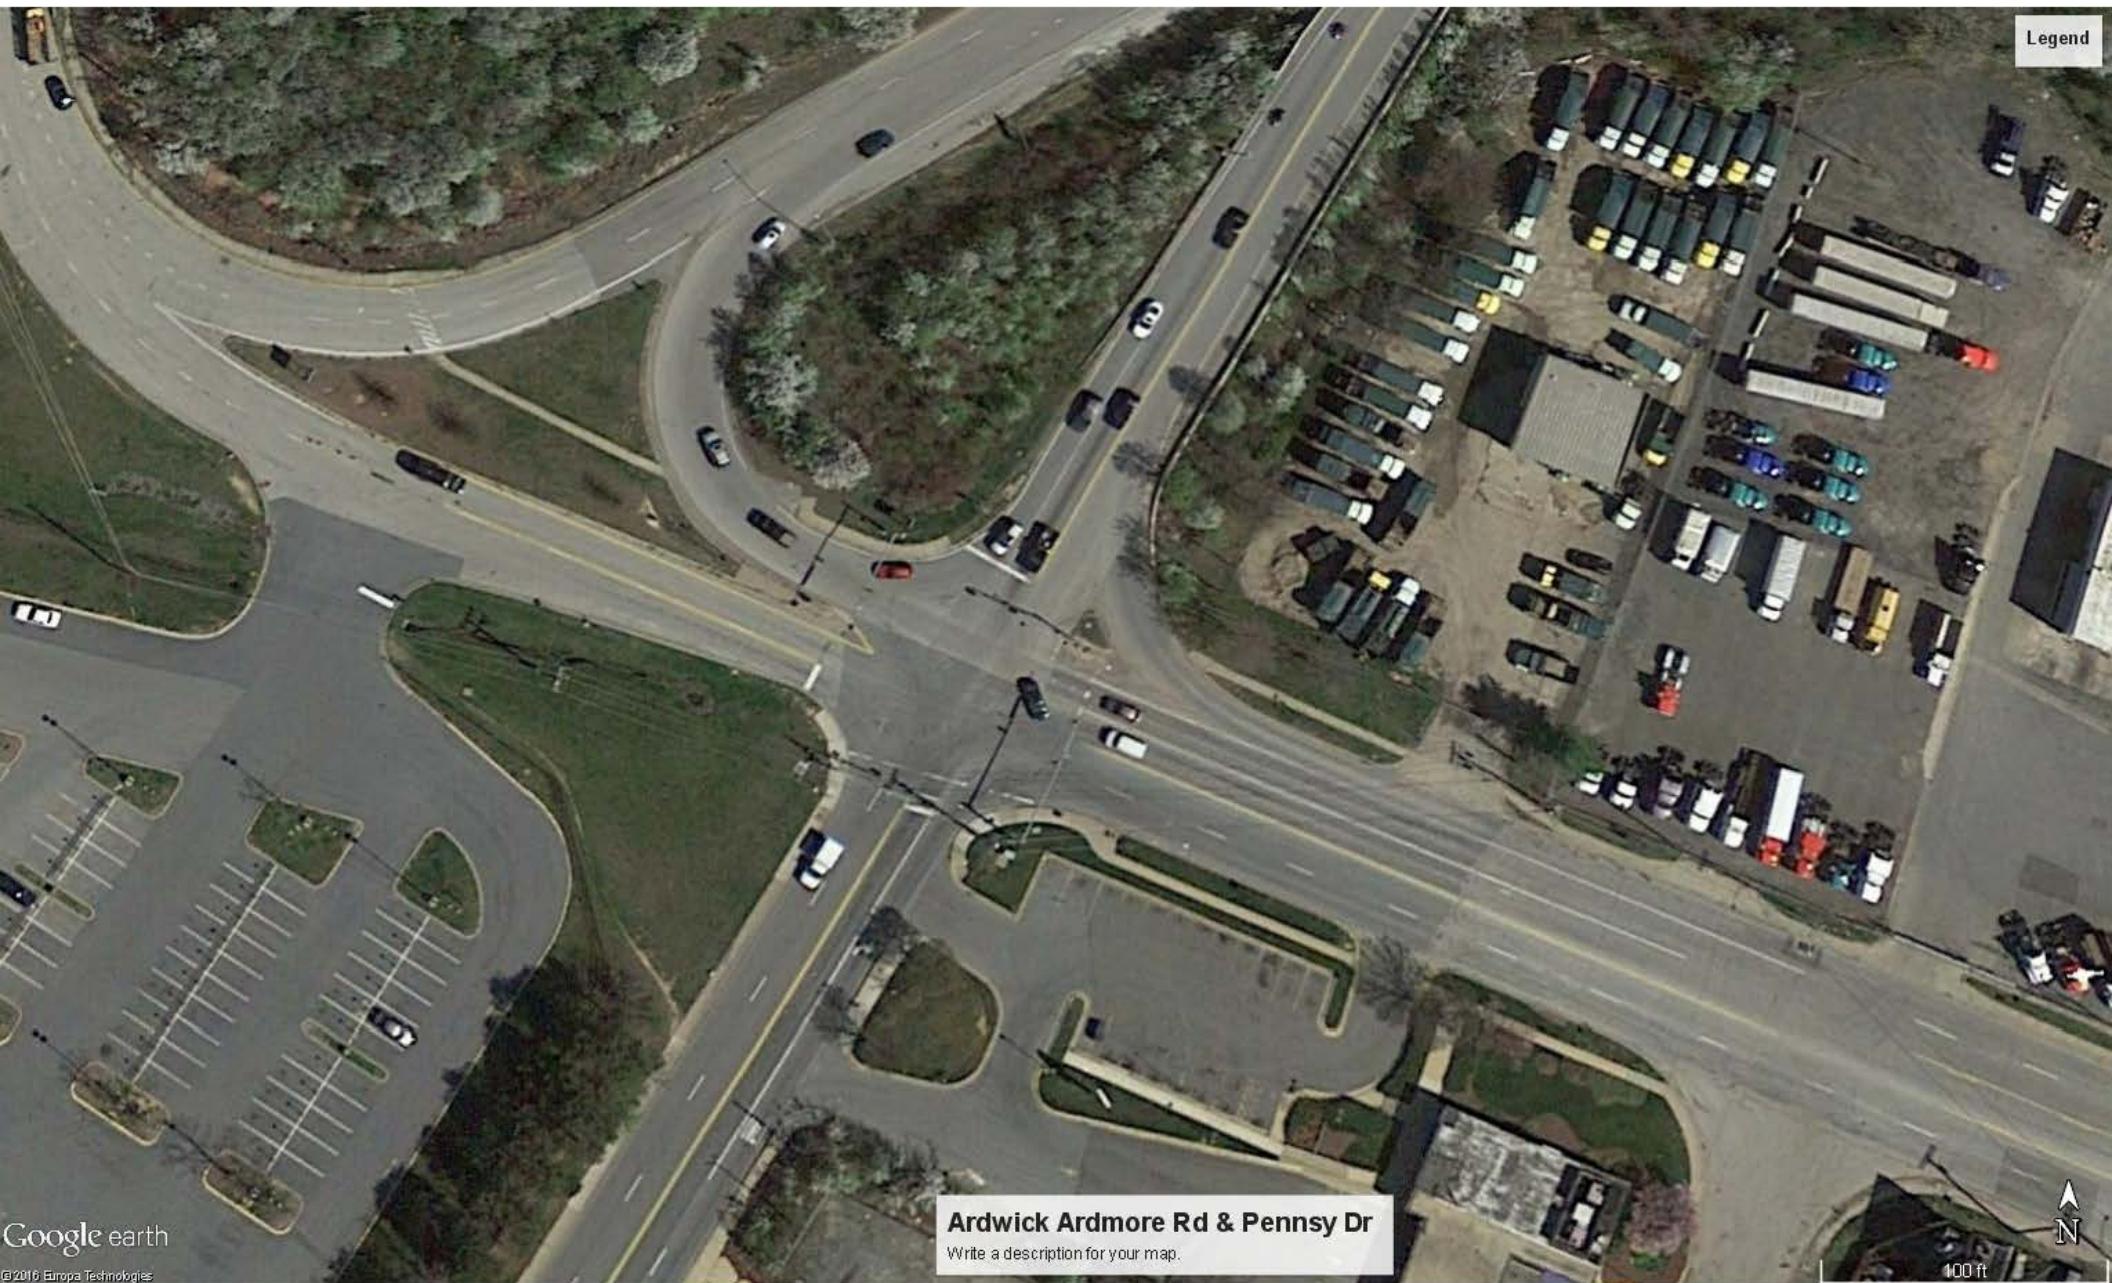

Google earth

©2016 Europa Technologies

Legend

N

100 ft

TOTALS TURNING MOVEMENT COUNT - SUMMARY

Intersection of: Corporate Drive

and: Pennsy Drive

Location: Prince George's County, Maryland

Counted by: VCU

Date: May 19, 2016

Thursday


Weather: Sunny/Warm



Entered by: AW

Star Rating: 5

TIME	TRAFFIC FROM NORTH					TRAFFIC FROM SOUTH					TRAFFIC FROM EAST					TRAFFIC FROM WEST					TOTAL N + S + E + W
	on: Corporate Drive					on: Corporate Drive					on: Pennsy Drive					on: Pennsy Drive					
	RIGHT	THRU	LEFT	U-TN	TOTAL	RIGHT	THRU	LEFT	U-TN	TOTAL	RIGHT	THRU	LEFT	U-TN	TOTAL	RIGHT	THRU	LEFT	U-TN	TOTAL	
AM																					
6:30 - 6:45	17	0	6	0	23	11	24	63	0	98	1	9	0	0	10	0	6	27	0	33	164
6:45 - 7:00	22	0	15	0	37	14	25	57	0	96	3	7	0	0	10	0	11	38	0	49	192
7:00 - 7:15	19	0	11	0	30	22	22	56	0	100	3	12	0	0	15	0	14	40	0	54	199
7:15 - 7:30	20	0	13	0	33	24	32	47	0	103	6	9	0	0	15	0	14	67	0	81	232
7:30 - 7:45	21	0	15	0	36	20	29	32	0	81	5	14	0	0	19	0	28	52	0	80	216
7:45 - 8:00	24	0	37	0	61	26	44	59	0	129	5	9	0	0	14	0	32	84	0	116	320
8:00 - 8:15	24	0	30	0	54	39	32	48	0	119	5	17	0	0	22	0	35	56	0	91	286
8:15 - 8:30	21	0	22	0	43	36	39	54	0	129	7	11	0	0	18	0	44	42	0	86	276
8:30 - 8:45	15	0	37	0	52	50	23	45	0	118	10	8	0	0	18	0	44	38	0	82	270
8:45 - 9:00	19	0	56	0	75	50	17	35	0	102	9	16	0	0	25	0	63	44	0	107	309
9:00 - 9:15	16	0	49	1	66	63	19	34	0	116	10	15	0	0	25	0	57	41	0	98	305
9:15 - 9:30	16	0	30	0	46	43	17	39	0	99	9	18	0	0	27	0	38	29	0	67	239
3 Hr Totals	234	0	321	1	556	398	323	569	0	1290	73	145	0	0	218	0	386	558	0	944	3008
1 Hr Totals																					
6:30 - 7:30	78	0	45	0	123	71	103	223	0	397	13	37	0	0	50	0	45	172	0	217	787
6:45 - 7:45	82	0	54	0	136	80	108	192	0	380	17	42	0	0	59	0	67	197	0	264	839
7:00 - 8:00	84	0	76	0	160	92	127	194	0	413	19	44	0	0	63	0	88	243	0	331	967
7:15 - 8:15	89	0	95	0	184	109	137	186	0	432	21	49	0	0	70	0	109	259	0	368	1054
7:30 - 8:30	90	0	104	0	194	121	144	193	0	458	22	51	0	0	73	0	139	234	0	373	1098
7:45 - 8:45	84	0	126	0	210	151	138	206	0	495	27	45	0	0	72	0	155	220	0	375	1152
8:00 - 9:00	79	0	145	0	224	175	111	182	0	468	31	52	0	0	83	0	186	180	0	366	1141
8:15 - 9:15	71	0	164	1	236	199	98	168	0	465	36	50	0	0	86	0	208	165	0	373	1160
8:30 - 9:30	66	0	172	1	239	206	76	153	0	435	38	57	0	0	95	0	202	152	0	354	1123
PEAK HOUR																					
8:15 - 9:15	71	0	164	1	236	199	98	168	0	465	36	50	0	0	86	0	208	165	0	373	1160
PM																					
4:00 - 4:15	18	0	7	0	25	6	8	34	0	48	11	66	0	0	77	0	17	38	0	55	205
4:15 - 4:30	23	0	4	0	27	2	6	34	0	42	15	49	0	0	64	0	8	25	0	33	166
4:30 - 4:45	23	0	1	0	24	5	4	30	0	39	28	89	0	0	117	0	11	31	0	42	222
4:45 - 5:00	21	0	5	0	26	7	8	34	0	49	20	55	0	0	75	0	7	33	0	40	190
5:00 - 5:15	25	0	1	0	26	1	8	23	0	32	52	96	0	0	148	0	11	39	1	51	257
5:15 - 5:30	25	0	2	0	27	5	6	39	0	50	45	62	0	0	107	0	8	41	0	49	233
5:30 - 5:45	15	0	3	0	18	1	13	27	0	41	36	80	0	0	116	0	12	23	0	35	210
5:45 - 6:00	19	0	8	0	27	0	8	39	0	47	25	49	0	0	74	0	8	40	0	48	196
6:00 - 6:15	23	0	1	0	24	5	5	25	0	35	11	51	0	0	62	0	9	33	1	43	164
6:15 - 6:30	22	0	3	0	25	1	15	28	0	44	8	38	0	0	46	0	12	23	0	35	150
6:30 - 6:45	15	0	6	0	21	1	6	32	0	39	13	31	0	0	44	0	9	26	0	35	139
6:45 - 7:00	20	0	1	0	21	5	5	27	0	37	11	26	0	0	37	0	4	25	1	30	125
3 Hr Totals	249	0	42	0	291	39	92	372	0	503	275	692	0	0	967	0	116	377	3	496	2257
1 Hr Totals																					
4:00 - 5:00	85	0	17	0	102	20	26	132	0	178	74	259	0	0	333	0	43	127	0	170	783
4:15 - 5:15	92	0	11	0	103	15	26	121	0	162	115	289	0	0	404	0	37	128	1	166	835
4:30 - 5:30	94	0	9	0	103	18	26	126	0	170	145	302	0	0	447	0	37	144	1	182	902
4:45 - 5:45	86	0	11	0	97	14	35	123	0	172	153	293	0	0	446	0	38	136	1	175	890
5:00 - 6:00	84	0	14	0	98	7	35	128	0	170	158	287	0	0	445	0	39	143	1	183	896
5:15 - 6:15	82	0	14	0	96	11	32	130	0	173	117	242	0	0	359	0	37	137	1	175	803
5:30 - 6:30	79	0	15	0	94	7	41	119	0	167	80	218	0	0	298	0	41	119	1	161	720
5:45 - 6:45	79	0	18	0	97	7	34	124	0	165	57	169	0	0	226	0	38	122	1	161	649
6:00 - 7:00	80	0	11	0	91	12	31	112	0	155	43	146	0	0	189	0	34	107	2	143	578
PEAK HOUR																					
4:30 - 5:30	94	0	9	0	103	18	26	126	0	170	145	302	0	0	447	0	37	144	1	182	902

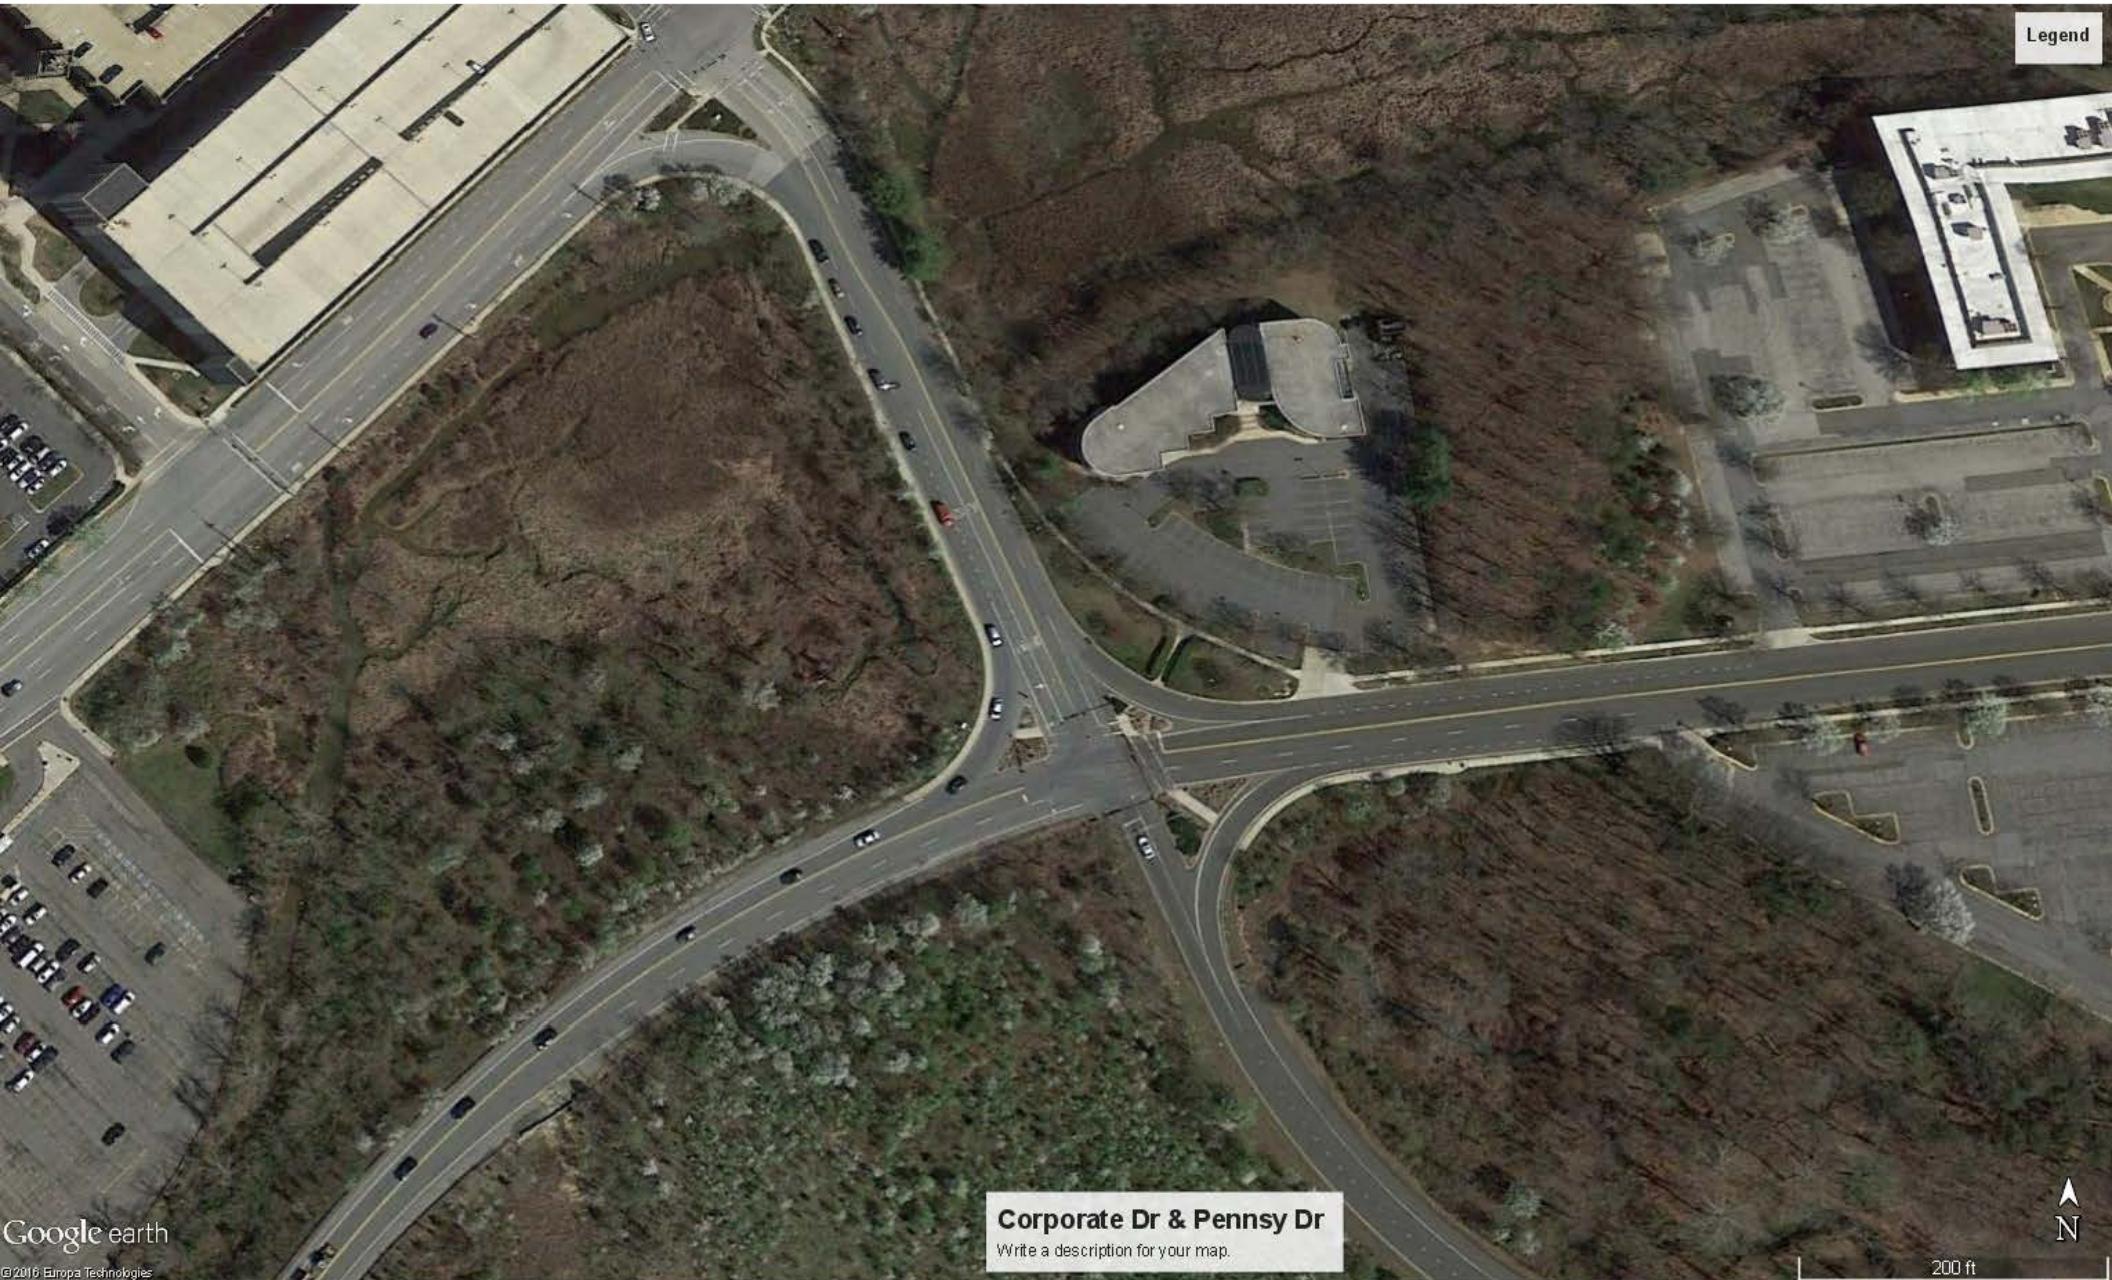

Corporate Dr & Pennsy Dr

Write a description for your map.

TOTALS TURNING MOVEMENT COUNT - SUMMARY

Counted by: VCU



Intersection of: I-495 Southbound Off Ramp

Date: May 19, 2016

Thursday

and: US 50 EB On Ramp - Pennsy Drive


Weather: Sunny/Warm

Location: Prince George's County, Maryland

Entered by: SN

Star Rating: 5

TIME	TRAFFIC FROM NORTH					TRAFFIC FROM SOUTH					TRAFFIC FROM EAST					TRAFFIC FROM WEST					TOTAL N + S + E + W				
	on: I-495 Southbound Off Ramp					on:					on: US 50 EB On Ramp					on: Pennsy Drive									
	RIGHT	THRU	LEFT	U-TN	TOTAL		RIGHT	THRU	LEFT	U-TN	TOTAL		RIGHT	THRU	LEFT	U-TN	TOTAL		RIGHT	THRU	LEFT	U-TN	TOTAL		
AM																									
6:30 - 6:45	78	0	102	0	180						0													0	180
6:45 - 7:00	80	0	105	0	185						0													0	185
7:00 - 7:15	73	0	99	0	172						0													0	172
7:15 - 7:30	73	0	103	0	176						0													0	176
7:30 - 7:45	71	0	88	0	159						0													0	159
7:45 - 8:00	69	0	132	0	201						0													0	201
8:00 - 8:15	56	0	123	0	179						0													0	179
8:15 - 8:30	73	0	127	0	200						0													0	200
8:30 - 8:45	62	0	126	0	188						0													0	188
8:45 - 9:00	63	0	105	0	168						0													0	168
9:00 - 9:15	73	0	120	0	193						0													0	193
9:15 - 9:30	82	0	103	0	185						0													0	185
3 Hr Totals	853	0	1333	0	2186	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	2186	
1 Hr Totals																									
6:30 - 7:30	304	0	409	0	713	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	713	
6:45 - 7:45	297	0	395	0	692	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	692	
7:00 - 8:00	286	0	422	0	708	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	708	
7:15 - 8:15	269	0	446	0	715	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	715	
7:30 - 8:30	269	0	470	0	739	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	739	
7:45 - 8:45	260	0	508	0	768	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	768	
8:00 - 9:00	254	0	481	0	735	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	735	
8:15 - 9:15	271	0	478	0	749	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	749	
8:30 - 9:30	280	0	454	0	734	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	734	
PEAK HOUR																									
7:45 - 8:45	260	0	508	0	768	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	768	
PM																									
4:00 - 4:15	59	0	55	0	114						0													0	114
4:15 - 4:30	58	0	48	0	106						0													0	106
4:30 - 4:45	62	0	50	0	112						0													0	112
4:45 - 5:00	46	0	51	0	97						0													0	97
5:00 - 5:15	52	0	32	0	84						0													0	84
5:15 - 5:30	47	0	54	0	101						0													0	101
5:30 - 5:45	56	0	45	0	101						0													0	101
5:45 - 6:00	59	0	53	0	112						0													0	112
6:00 - 6:15	53	0	48	0	101						0													0	101
6:15 - 6:30	48	0	48	0	96						0													0	96
6:30 - 6:45	46	0	49	0	95						0													0	95
6:45 - 7:00	59	0	41	0	100						0													0	100
3 Hr Totals	645	0	574	0	1219	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1219	
1 Hr Totals																									
4:00 - 5:00	225	0	204	0	429	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	429	
4:15 - 5:15	218	0	181	0	399	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	399	
4:30 - 5:30	207	0	187	0	394	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	394	
4:45 - 5:45	201	0	182	0	383	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	383	
5:00 - 6:00	214	0	184	0	398	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	398	
5:15 - 6:15	215	0	200	0	415	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	415	
5:30 - 6:30	216	0	194	0	410	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	410	
5:45 - 6:45	206	0	198	0	404	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	404	
6:00 - 7:00	206	0	186	0	392	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	392	
PEAK HOUR																									
4:00 - 5:00	225	0	204	0	429	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	429	

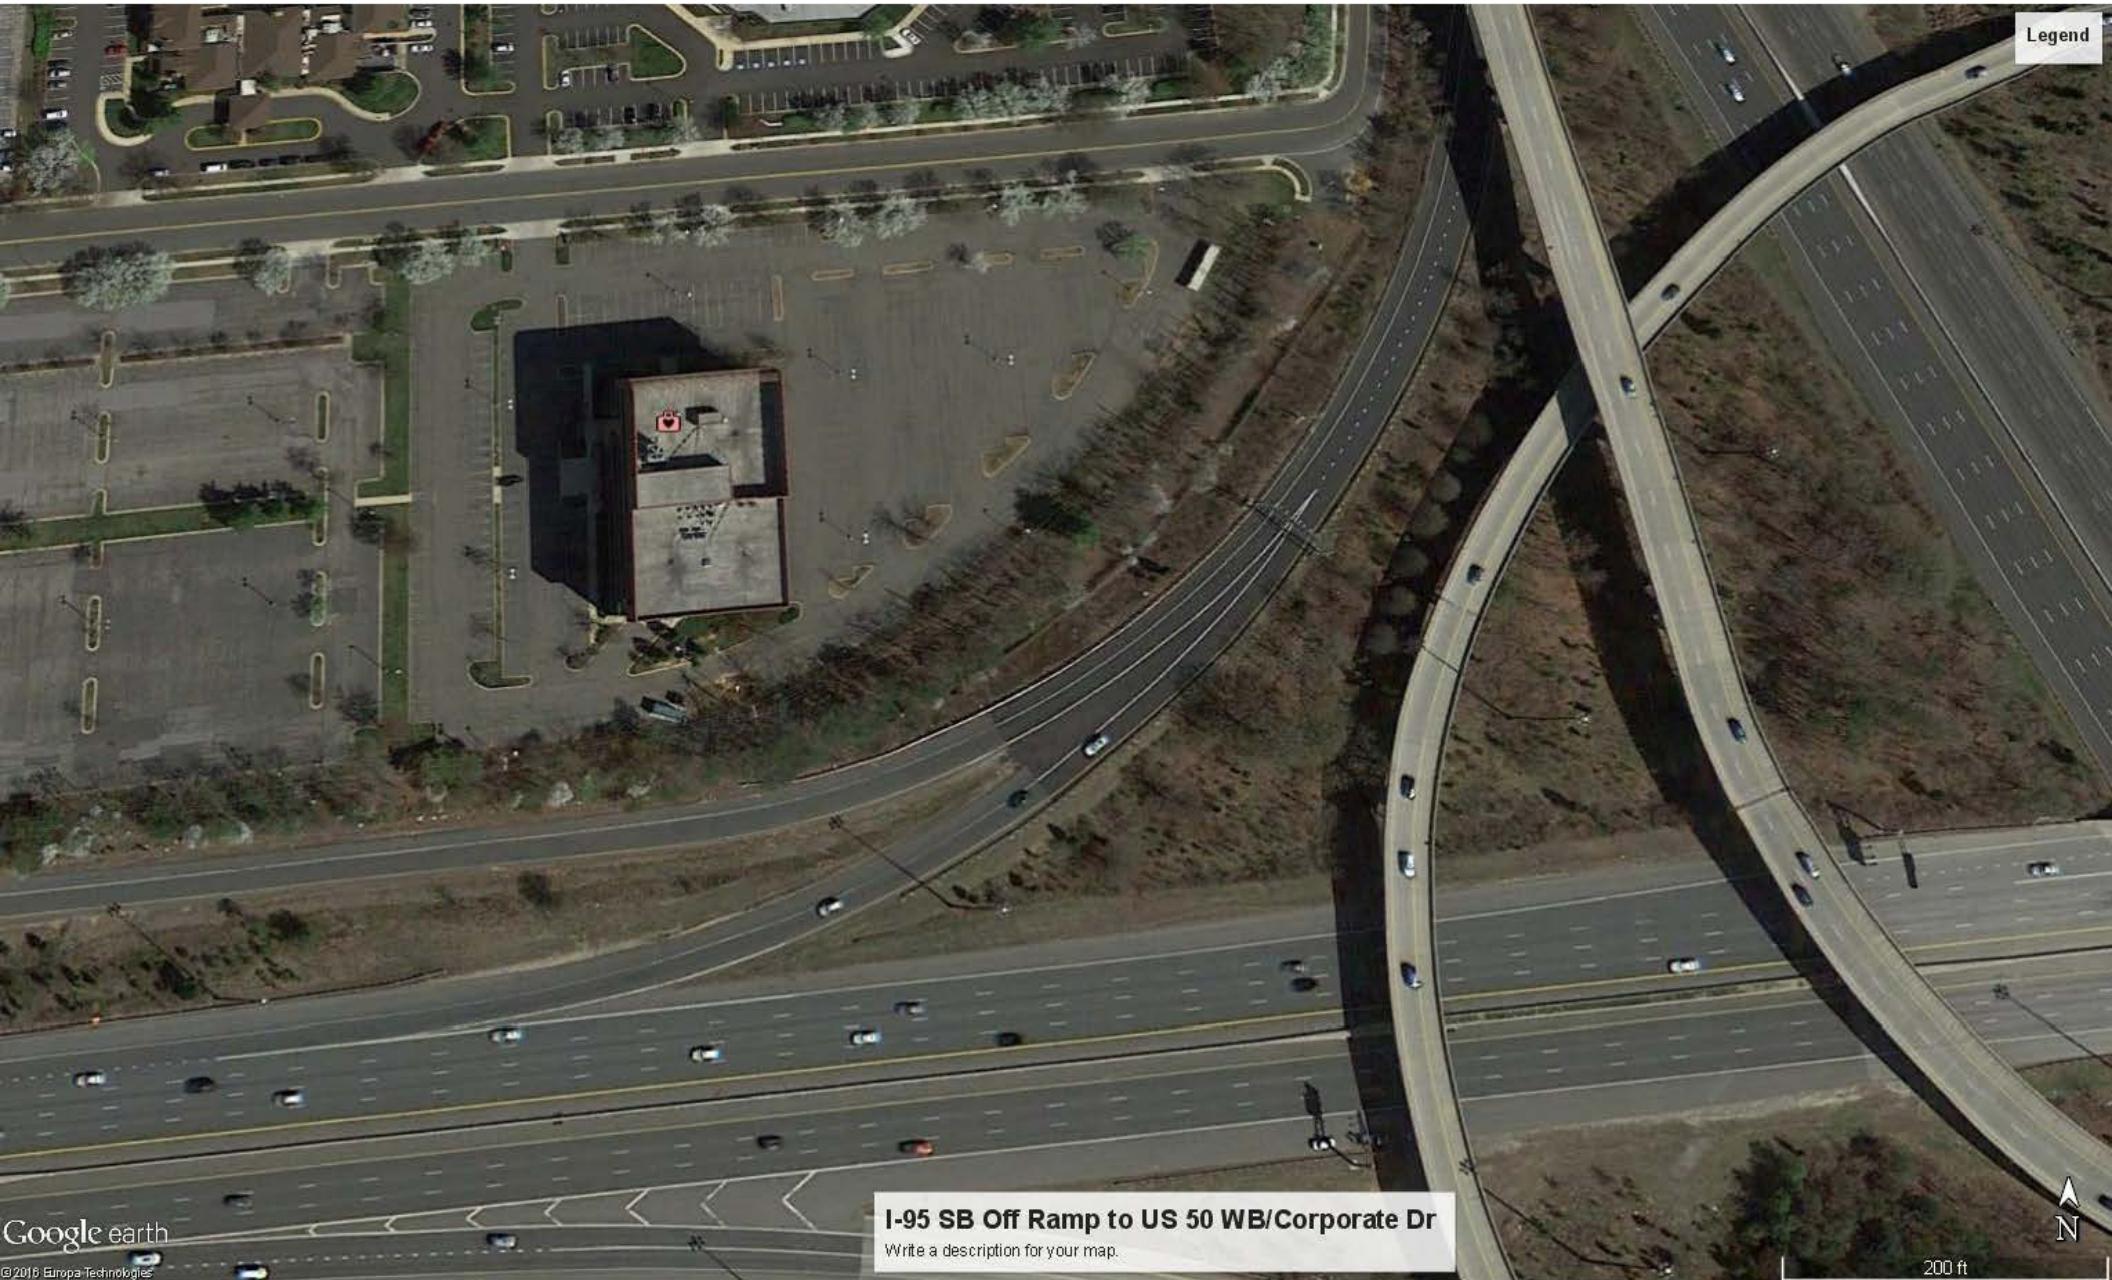

VEHICLES TURNING MOVEMENT COUNT - SUMMARY

 Intersection of: Annapolis Road
 and: 85th Avenue

Location: Prince George's County, Maryland

Counted by: VCU

Date: May 19, 2016

Thursday



Weather: Sunny/Warm

Entered by: AW

Star Rating: 4

TIME	TRAFFIC FROM NORTH					TRAFFIC FROM SOUTH					TRAFFIC FROM EAST					TRAFFIC FROM WEST					TOTAL N + S + E + W
	on: 85th Avenue					on: 85th Avenue					on: Annapolis Road					on: Annapolis Road					
	RIGHT	THRU	LEFT	U-TN	TOTAL	RIGHT	THRU	LEFT	U-TN	TOTAL	RIGHT	THRU	LEFT	U-TN	TOTAL	RIGHT	THRU	LEFT	U-TN	TOTAL	
AM																					
6:30 - 6:45	7	19	73	0	99	54	6	10	0	70	46	249	77	2	374	2	176	2	0	180	723
6:45 - 7:00	12	23	48	0	83	63	8	11	0	82	31	331	65	2	429	5	167	10	1	183	777
7:00 - 7:15	15	18	53	0	86	45	9	17	0	71	41	307	77	1	426	12	166	8	0	186	769
7:15 - 7:30	21	25	64	0	110	56	11	17	0	84	53	320	83	2	458	7	164	10	0	181	833
7:30 - 7:45	22	30	83	0	135	65	12	16	0	93	32	344	70	1	447	9	219	9	2	239	914
7:45 - 8:00	20	32	77	0	129	53	11	13	0	77	47	378	96	3	524	9	210	9	1	229	959
8:00 - 8:15	25	22	76	0	123	56	12	10	0	78	48	330	74	4	456	5	193	12	3	213	870
8:15 - 8:30	15	13	76	0	104	53	6	19	0	78	37	331	77	4	449	7	194	9	1	211	842
8:30 - 8:45	15	12	88	0	115	36	7	13	0	56	33	292	86	1	412	3	211	3	2	219	802
8:45 - 9:00	17	19	68	0	104	44	6	16	0	66	39	288	67	3	397	8	186	4	4	202	769
9:00 - 9:15	11	19	75	0	105	34	10	23	0	67	35	251	58	3	347	10	153	6	2	171	690
9:15 - 9:30	6	12	68	0	86	33	5	15	0	53	46	280	61	4	391	4	186	10	2	202	732
3 Hr Totals	186	244	849	0	1279	592	103	180	0	875	488	3701	891	30	5110	81	2225	92	18	2416	9680
1 Hr Totals																					
6:30 - 7:30	55	85	238	0	378	218	34	55	0	307	171	1207	302	7	1687	26	673	30	1	730	3102
6:45 - 7:45	70	96	248	0	414	229	40	61	0	330	157	1302	295	6	1760	33	716	37	3	789	3293
7:00 - 8:00	78	105	277	0	460	219	43	63	0	325	173	1349	326	7	1855	37	759	36	3	835	3475
7:15 - 8:15	88	109	300	0	497	230	46	56	0	332	180	1372	323	10	1885	30	786	40	6	862	3576
7:30 - 8:30	82	97	312	0	491	227	41	58	0	326	164	1383	317	12	1876	30	816	39	7	892	3585
7:45 - 8:45	75	79	317	0	471	198	36	55	0	289	165	1331	333	12	1841	24	808	33	7	872	3473
8:00 - 9:00	72	66	308	0	446	189	31	58	0	278	157	1241	304	12	1714	23	784	28	10	845	3283
8:15 - 9:15	58	63	307	0	428	167	29	71	0	267	144	1162	288	11	1605	28	744	22	9	803	3103
8:30 - 9:30	49	62	299	0	410	147	28	67	0	242	153	1111	272	11	1547	25	736	23	10	794	2993
PEAK HOUR																					
7:30 - 8:30	82	97	312	0	491	227	41	58	0	326	164	1383	317	12	1876	30	816	39	7	892	3585
PM																					
4:00 - 4:15	10	32	94	0	136	77	23	23	0	123	49	267	49	2	367	15	415	16	5	451	1077
4:15 - 4:30	10	15	79	0	104	85	14	34	0	133	65	269	65	5	404	13	425	17	6	461	1102
4:30 - 4:45	15	16	76	0	107	102	18	29	0	149	58	268	68	5	399	20	388	20	4	432	1087
4:45 - 5:00	12	22	92	0	126	113	14	29	0	156	67	288	61	6	422	7	428	21	3	459	1163
5:00 - 5:15	14	22	76	0	112	93	30	32	0	155	72	289	81	3	445	10	430	22	4	466	1178
5:15 - 5:30	11	26	92	0	129	115	19	30	0	164	61	308	69	8	446	13	378	18	4	413	1152
5:30 - 5:45	10	19	91	0	120	110	25	28	0	163	84	307	63	7	461	8	415	29	3	455	1199
5:45 - 6:00	16	24	76	0	116	111	24	26	0	161	78	306	73	8	465	13	401	24	3	441	1183
6:00 - 6:15	14	34	93	0	141	97	23	39	0	159	64	305	58	7	434	11	344	21	6	382	1116
6:15 - 6:30	17	31	85	0	133	106	19	35	0	160	81	326	69	5	481	10	383	14	9	416	1190
6:30 - 6:45	9	30	107	0	146	92	22	30	0	144	84	303	70	4	461	8	325	16	6	355	1106
6:45 - 7:00	21	21	91	0	133	79	16	23	0	118	78	303	62	10	453	8	385	16	9	418	1122
3 Hr Totals	159	292	1052	0	1503	1180	247	358	0	1785	841	3539	788	70	5238	136	4717	234	62	5149	13675
1 Hr Totals																					
4:00 - 5:00	47	85	341	0	473	377	69	115	0	561	239	1092	243	18	1592	55	1656	74	18	1803	4429
4:15 - 5:15	51	75	323	0	449	393	76	124	0	593	262	1114	275	19	1670	50	1671	80	17	1818	4530
4:30 - 5:30	52	86	336	0	474	423	81	120	0	624	258	1153	279	22	1712	50	1624	81	15	1770	4580
4:45 - 5:45	47	89	351	0	487	431	88	119	0	638	284	1192	274	24	1774	38	1651	90	14	1793	4692
5:00 - 6:00	51	91	335	0	477	429	98	116	0	643	295	1210	286	26	1817	44	1624	93	14	1775	4712
5:15 - 6:15	51	103	352	0	506	433	91	123	0	647	287	1226	263	30	1806	45	1538	92	16	1691	4650
5:30 - 6:30	57	108	345	0	510	424	91	128	0	643	307	1244	263	27	1841	42	1543	88	21	1694	4688
5:45 - 6:45	56	119	361	0	536	406	88	130	0	624	307	1240	270	24	1841	42	1453	75	24	1594	4595
6:00 - 7:00	61	116	376	0	553	374	80	127	0	581	307	1237	259	26	1829	37	1437	67	30	1571	4534
PEAK HOUR																					
5:00 - 6:00	51	91	335	0	477	429	98	116	0	643	295	1210	286	26	1817	44	1624	93	14	1775	4712



Google earth

©2016 Europa Technologies

MD 450 & 85th Ave

Write a description for your map.

N

100 ft

TOTALS TURNING MOVEMENT COUNT - SUMMARY

 Intersection of: Annapolis Road
 and: Harkins Road

Location: Prince George's County, Maryland

Counted by: VCU

Date: May 19, 2016

Weather: Sunny/Warm

Thursday



Entered by: AW

Star Rating: 5

TIME	TRAFFIC FROM NORTH					TRAFFIC FROM SOUTH					TRAFFIC FROM EAST					TRAFFIC FROM WEST					TOTAL N + S + E + W
	on: Finns Lane					on: Harkins Road					on: Annapolis Road					on: Annapolis Road					
	RIGHT	THRU	LEFT	U-TN	TOTAL	RIGHT	THRU	LEFT	U-TN	TOTAL	RIGHT	THRU	LEFT	U-TN	TOTAL	RIGHT	THRU	LEFT	U-TN	TOTAL	
AM																					
6:30 - 6:45	19	0	12	0	31	5	6	5	0	16	7	195	10	2	214	13	100	13	0	126	387
6:45 - 7:00	23	13	10	0	46	4	7	7	0	18	6	232	8	4	250	19	113	10	0	142	456
7:00 - 7:15	29	6	22	0	57	6	3	11	0	20	6	243	11	4	264	13	109	12	1	135	476
7:15 - 7:30	30	8	17	0	55	2	9	9	0	20	6	262	4	6	278	14	138	23	0	175	528
7:30 - 7:45	38	8	14	0	60	6	5	10	0	21	5	266	10	2	283	14	163	36	1	214	578
7:45 - 8:00	25	6	22	0	53	4	9	9	0	22	4	267	14	4	289	16	210	27	0	253	617
8:00 - 8:15	27	4	22	0	53	6	4	7	0	17	10	234	9	4	257	10	184	23	1	218	545
8:15 - 8:30	24	7	15	0	46	3	5	9	0	17	8	235	11	7	261	10	165	26	1	202	526
8:30 - 8:45	20	4	16	0	40	4	1	4	0	9	12	206	9	5	232	11	162	26	0	199	480
8:45 - 9:00	29	1	16	0	46	5	3	12	0	20	12	188	7	8	215	16	144	9	0	169	450
9:00 - 9:15	16	4	11	0	31	1	4	8	0	13	4	194	6	6	210	9	152	15	0	176	430
9:15 - 9:30	20	4	6	0	30	7	3	4	0	14	8	184	6	2	200	8	159	13	2	182	426
3 Hr Totals	300	65	183	0	548	53	59	95	0	207	88	2706	105	54	2953	153	1799	233	6	2191	5899
1 Hr Totals																					
6:30 - 7:30	101	27	61	0	189	17	25	32	0	74	25	932	33	16	1006	59	460	58	1	578	1847
6:45 - 7:45	120	35	63	0	218	18	24	37	0	79	23	1003	33	16	1075	60	523	81	2	666	2038
7:00 - 8:00	122	28	75	0	225	18	26	39	0	83	21	1038	39	16	1114	57	620	98	2	777	2199
7:15 - 8:15	120	26	75	0	221	18	27	35	0	80	25	1029	37	16	1107	54	695	109	2	860	2268
7:30 - 8:30	114	25	73	0	212	19	23	35	0	77	27	1002	44	17	1090	50	722	112	3	887	2266
7:45 - 8:45	96	21	75	0	192	17	19	29	0	65	34	942	43	20	1039	47	721	102	2	872	2168
8:00 - 9:00	100	16	69	0	185	18	13	32	0	63	42	863	36	24	965	47	655	84	2	788	2001
8:15 - 9:15	89	16	58	0	163	13	13	33	0	59	36	823	33	26	918	46	623	76	1	746	1886
8:30 - 9:30	85	13	49	0	147	17	11	28	0	56	36	772	28	21	857	44	617	63	2	726	1786
PEAK HOUR																					
7:15 - 8:15	120	26	75	0	221	18	27	35	0	80	25	1029	37	16	1107	54	695	109	2	860	2268
PM																					
4:00 - 4:15	24	6	8	0	38	8	3	23	0	34	16	176	11	6	209	9	306	33	1	349	630
4:15 - 4:30	24	4	11	0	39	8	8	18	0	34	6	209	6	2	223	9	316	29	4	358	654
4:30 - 4:45	23	6	17	0	46	11	9	21	0	41	10	176	14	4	204	14	308	28	1	351	642
4:45 - 5:00	21	14	11	0	46	6	9	27	0	42	14	182	14	12	222	12	301	42	2	357	667
5:00 - 5:15	31	10	13	0	54	12	11	21	0	44	10	203	15	5	233	13	347	32	3	395	726
5:15 - 5:30	22	10	19	0	51	11	11	26	1	49	8	171	16	11	206	15	326	39	3	383	689
5:30 - 5:45	30	5	20	0	55	10	14	25	0	49	15	192	16	5	228	17	335	37	3	392	724
5:45 - 6:00	23	11	14	0	48	10	18	25	0	53	15	186	12	9	222	10	355	43	3	411	734
6:00 - 6:15	25	7	15	0	47	6	9	18	0	33	15	237	14	9	275	11	293	38	3	345	700
6:15 - 6:30	14	10	12	0	36	11	8	17	0	36	21	214	16	9	260	10	306	35	0	351	683
6:30 - 6:45	16	10	23	0	49	11	10	16	2	39	14	197	15	5	231	6	278	32	1	317	636
6:45 - 7:00	21	4	16	0	41	8	4	16	0	28	17	214	12	10	253	12	299	32	2	345	667
3 Hr Totals	274	97	179	0	550	112	114	253	3	482	161	2357	161	87	2766	138	3770	420	26	4354	8152
1 Hr Totals																					
4:00 - 5:00	92	30	47	0	169	33	29	89	0	151	46	743	45	24	858	44	1231	132	8	1415	2593
4:15 - 5:15	99	34	52	0	185	37	37	87	0	161	40	770	49	23	882	48	1272	131	10	1461	2689
4:30 - 5:30	97	40	60	0	197	40	40	95	1	176	42	732	59	32	865	54	1282	141	9	1486	2724
4:45 - 5:45	104	39	63	0	206	39	45	99	1	184	47	748	61	33	889	57	1309	150	11	1527	2806
5:00 - 6:00	106	36	66	0	208	43	54	97	1	195	48	752	59	30	889	55	1363	151	12	1581	2873
5:15 - 6:15	100	33	68	0	201	37	52	94	1	184	53	786	58	34	931	53	1309	157	12	1531	2847
5:30 - 6:30	92	33	61	0	186	37	49	85	0	171	66	829	58	32	985	48	1289	153	9	1499	2841
5:45 - 6:45	78	38	64	0	180	38	45	76	2	161	65	834	57	32	988	37	1232	148	7	1424	2753
6:00 - 7:00	76	31	66	0	173	36	31	67	2	136	67	862	57	33	1019	39	1176	137	6	1358	2686
PEAK HOUR																					
5:00 - 6:00	106	36	66	0	208	43	54	97	1	195	48	752	59	30	889	55	1363	151	12	1581	2873



Google earth

© 2016 Europa Technologies

MD 450 & Finns Ln/Harkins Rd

Write a description for your map.

N

TOTALS TURNING MOVEMENT COUNT - SUMMARY

Counted by: VCU

Intersection of: Harkins Road

and: Ellin Road

Location: Prince George's County, Maryland

Date: May 19, 2016

Weather: Sunny/Warm


Thursday



Entered by: SN

Star Rating: 4

TIME	TRAFFIC FROM NORTH					TRAFFIC FROM SOUTH					TRAFFIC FROM EAST					TRAFFIC FROM WEST					TOTAL N + S + E + W
	on: Harkins Road					on: Parking Access					on: Ellin Road					on: Ellin Road					
	RIGHT	THRU	LEFT	U-TN	TOTAL	RIGHT	THRU	LEFT	U-TN	TOTAL	RIGHT	THRU	LEFT	U-TN	TOTAL	RIGHT	THRU	LEFT	U-TN	TOTAL	
AM																					
6:30 - 6:45	25	6	6	0	37	1	0	3	0	4	12	53	30	0	95	11	45	77	0	133	269
6:45 - 7:00	29	7	3	0	39	2	0	0	0	2	26	50	43	0	119	5	56	95	0	156	316
7:00 - 7:15	18	5	5	0	28	0	0	0	0	0	24	53	25	1	103	10	45	87	0	142	273
7:15 - 7:30	21	10	14	0	45	1	1	0	0	2	24	43	23	0	90	11	36	76	2	125	262
7:30 - 7:45	21	8	12	0	41	2	0	1	0	3	21	37	21	0	79	15	31	67	2	115	238
7:45 - 8:00	12	16	8	0	36	0	1	0	0	1	15	43	19	0	77	11	41	58	0	110	224
8:00 - 8:15	16	4	5	0	25	0	0	1	0	1	12	41	17	0	70	16	41	44	1	102	198
8:15 - 8:30	16	7	4	0	27	0	0	0	0	0	13	44	5	0	62	5	41	35	0	81	172
8:30 - 8:45	13	6	7	0	26	0	0	0	0	0	6	44	5	0	55	8	40	20	0	68	149
8:45 - 9:00	15	1	5	1	22	2	1	0	0	3	12	40	11	0	63	4	44	16	0	64	152
9:00 - 9:15	14	1	9	0	24	2	1	2	0	5	9	31	4	0	44	2	34	24	0	60	133
9:15 - 9:30	25	1	5	0	31	0	1	0	0	1	6	31	2	0	39	0	28	18	0	46	117
3 Hr Totals	225	72	83	1	381	10	5	9	0	24	180	510	205	1	896	98	482	617	5	1202	2503
1 Hr Totals																					
6:30 - 7:30	93	28	28	0	149	4	1	3	0	8	86	199	121	1	407	37	182	335	2	556	1120
6:45 - 7:45	89	30	34	0	153	5	1	1	0	7	95	183	112	1	391	41	168	325	4	538	1089
7:00 - 8:00	72	39	39	0	150	3	2	1	0	6	84	176	88	1	349	47	153	288	4	492	997
7:15 - 8:15	70	38	39	0	147	3	2	2	0	7	72	164	80	0	316	53	149	245	5	452	922
7:30 - 8:30	65	35	29	0	129	2	1	4	0	7	61	165	62	0	288	47	154	204	3	408	832
7:45 - 8:45	57	33	24	0	114	0	1	3	0	4	46	172	46	0	264	40	163	157	1	361	743
8:00 - 9:00	60	18	21	1	100	2	1	3	0	6	43	169	38	0	250	33	166	115	1	315	671
8:15 - 9:15	58	15	25	1	99	4	2	4	0	10	40	159	25	0	224	19	159	95	0	273	606
8:30 - 9:30	67	9	26	1	103	4	3	2	0	9	33	146	22	0	201	14	146	78	0	238	551
PEAK HOUR																					
6:30 - 7:30	93	28	28	0	149	4	1	3	0	8	86	199	121	1	407	37	182	335	2	556	1120
PM																					
4:00 - 4:15	74	2	27	0	103	25	6	9	0	40	9	78	0	1	88	2	72	30	1	105	336
4:15 - 4:30	78	0	23	0	101	42	9	10	0	61	12	71	1	0	84	1	75	29	0	105	351
4:30 - 4:45	83	3	26	0	112	37	11	16	0	64	10	71	1	2	84	0	86	27	0	113	373
4:45 - 5:00	56	0	22	0	78	36	13	8	0	57	13	75	1	0	89	1	77	25	2	105	329
5:00 - 5:15	68	0	18	0	86	23	5	10	0	38	8	67	0	1	76	1	71	15	1	88	288
5:15 - 5:30	55	0	19	1	75	26	4	3	0	33	9	63	0	0	72	0	81	28	1	110	290
5:30 - 5:45	37	0	20	0	57	28	3	4	0	35	8	58	0	0	66	2	68	21	0	91	249
5:45 - 6:00	39	1	16	0	56	12	4	3	0	19	7	51	0	2	60	0	53	13	0	66	201
6:00 - 6:15	32	0	12	0	44	6	3	7	0	16	11	44	0	0	55	0	67	21	3	91	206
6:15 - 6:30	26	0	10	0	36	8	3	6	0	17	14	54	0	0	68	1	57	10	0	68	189
6:30 - 6:45	20	0	4	0	24	11	2	1	0	14	4	44	0	0	48	1	55	13	1	70	156
6:45 - 7:00	13	0	8	0	21	9	1	0	0	10	8	50	1	2	61	0	56	14	0	70	162
3 Hr Totals	581	6	205	1	793	263	64	77	0	404	113	726	4	8	851	9	818	246	9	1082	3130
1 Hr Totals																					
4:00 - 5:00	291	5	98	0	394	140	39	43	0	222	44	295	3	3	345	4	310	111	3	428	1389
4:15 - 5:15	285	3	89	0	377	138	38	44	0	220	43	284	3	3	333	3	309	96	3	411	1341
4:30 - 5:30	262	3	85	1	351	122	33	37	0	192	40	276	2	3	321	2	315	95	4	416	1280
4:45 - 5:45	216	0	79	1	296	113	25	25	0	163	38	263	1	1	303	4	297	89	4	394	1156
5:00 - 6:00	199	1	73	1	274	89	16	20	0	125	32	239	0	3	274	3	273	77	2	355	1028
5:15 - 6:15	163	1	67	1	232	72	14	17	0	103	35	216	0	2	253	2	269	83	4	358	946
5:30 - 6:30	134	1	58	0	193	54	13	20	0	87	40	207	0	2	249	3	245	65	3	316	845
5:45 - 6:45	117	1	42	0	160	37	12	17	0	66	36	193	0	2	231	2	232	57	4	295	752
6:00 - 7:00	91	0	34	0	125	34	9	14	0	57	37	192	1	2	232	2	235	58	4	299	713
PEAK HOUR																					
4:00 - 5:00	291	5	98	0	394	140	39	43	0	222	44	295	3	3	345	4	310	111	3	428	1389

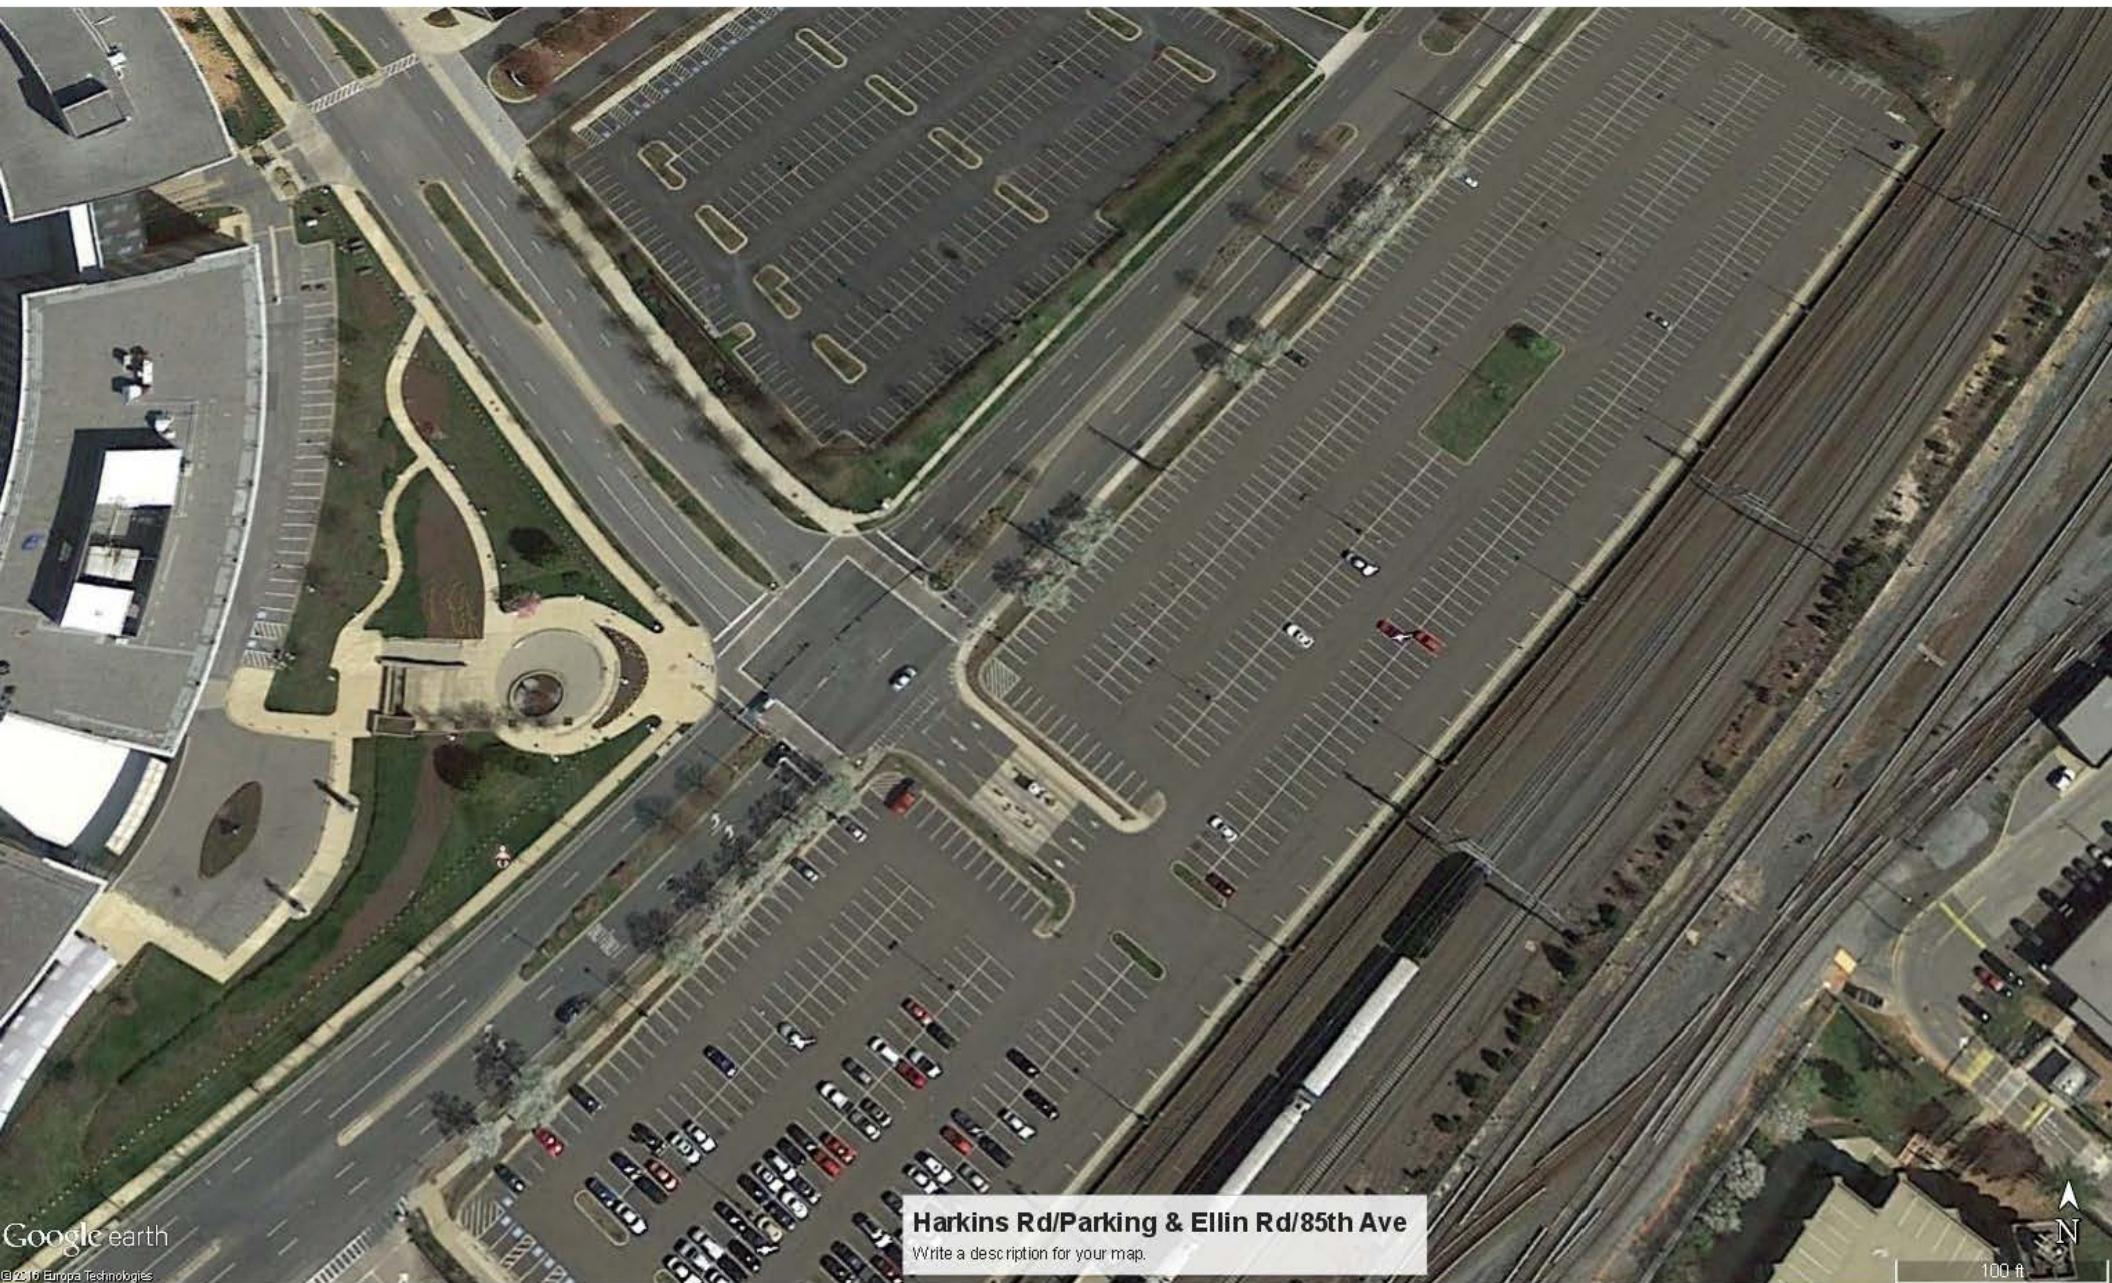

Harkins Rd/Parking & Ellin Rd/85th Ave

Write a description for your map.

Google earth

©2016 Europa Technologies

N

100 ft

TOTALS TURNING MOVEMENT COUNT - SUMMARY

Counted by: VCU

Intersection of: MD 410

and: Ellin Road

Location: Prince George's County, Maryland

Date: May 19, 2016

Thursday



Weather: Sunny/Warm

Entered by: AW

Star Rating: 4

TIME	TRAFFIC FROM NORTH					TRAFFIC FROM SOUTH					TRAFFIC FROM EAST					TRAFFIC FROM WEST					TOTAL N + S + E + W
	on: MD 410					on: MD 410					on: Ellin Road					on:					
	RIGHT	THRU	LEFT	U-TN	TOTAL	RIGHT	THRU	LEFT	U-TN	TOTAL	RIGHT	THRU	LEFT	U-TN	TOTAL	RIGHT	THRU	LEFT	U-TN	TOTAL	
AM																					
6:30 - 6:45	0	228	12	0	240	57	226	0	0	283	11	0	29	0	40	0	0	0	0	0	563
6:45 - 7:00	0	220	12	0	232	59	276	0	0	335	16	0	25	0	41	0	0	0	0	0	608
7:00 - 7:15	0	231	22	1	254	76	269	0	1	346	9	0	45	0	54	0	0	0	0	0	654
7:15 - 7:30	0	250	12	1	263	93	315	0	0	408	23	0	40	0	63	0	0	0	0	0	734
7:30 - 7:45	0	263	14	0	277	89	354	0	0	443	15	0	48	0	63	0	0	0	0	0	783
7:45 - 8:00	0	268	11	0	279	110	434	0	1	545	11	0	41	0	52	0	0	0	0	0	876
8:00 - 8:15	0	212	12	0	224	95	370	0	0	465	9	0	43	0	52	0	0	0	0	0	741
8:15 - 8:30	0	244	5	1	250	87	326	0	0	413	12	0	36	0	48	0	0	0	0	0	711
8:30 - 8:45	0	204	11	0	215	88	289	0	0	377	9	0	45	0	54	0	0	0	0	0	646
8:45 - 9:00	0	196	9	0	205	86	264	0	0	350	8	0	35	0	43	0	0	0	0	0	598
9:00 - 9:15	0	230	8	0	238	91	264	0	0	355	7	0	49	0	56	0	0	0	0	0	649
9:15 - 9:30	0	197	8	0	205	55	253	0	0	308	9	0	47	0	56	0	0	0	0	0	569
3 Hr Totals	0	2743	136	3	2882	986	3640	0	2	4628	139	0	483	0	622	0	0	0	0	0	8132
1 Hr Totals																					
6:30 - 7:30	0	929	58	2	989	285	1086	0	1	1372	59	0	139	0	198	0	0	0	0	0	2559
6:45 - 7:45	0	964	60	2	1026	317	1214	0	1	1532	63	0	158	0	221	0	0	0	0	0	2779
7:00 - 8:00	0	1012	59	2	1073	368	1372	0	2	1742	58	0	174	0	232	0	0	0	0	0	3047
7:15 - 8:15	0	993	49	1	1043	387	1473	0	1	1861	58	0	172	0	230	0	0	0	0	0	3134
7:30 - 8:30	0	987	42	1	1030	381	1484	0	1	1866	47	0	168	0	215	0	0	0	0	0	3111
7:45 - 8:45	0	928	39	1	968	380	1419	0	1	1800	41	0	165	0	206	0	0	0	0	0	2974
8:00 - 9:00	0	856	37	1	894	356	1249	0	0	1605	38	0	159	0	197	0	0	0	0	0	2696
8:15 - 9:15	0	874	33	1	908	352	1143	0	0	1495	36	0	165	0	201	0	0	0	0	0	2604
8:30 - 9:30	0	827	36	0	863	320	1070	0	0	1390	33	0	176	0	209	0	0	0	0	0	2462
PEAK HOUR																					
7:15 - 8:15	0	993	49	1	1043	387	1473	0	1	1861	58	0	172	0	230	0	0	0	0	0	3134
PM																					
4:00 - 4:15	0	307	9	0	316	54	257	0	0	311	14	0	89	0	103	0	0	0	0	0	730
4:15 - 4:30	0	287	11	0	298	45	237	0	0	282	4	0	113	0	117	0	0	0	0	0	697
4:30 - 4:45	0	320	8	1	329	62	243	0	0	305	12	0	119	0	131	0	0	0	0	0	765
4:45 - 5:00	0	315	9	0	324	57	214	0	0	271	12	0	122	0	134	0	0	0	0	0	729
5:00 - 5:15	0	303	18	2	323	73	293	0	1	367	13	0	126	0	139	0	0	0	0	0	829
5:15 - 5:30	0	346	12	0	358	65	244	0	1	310	24	0	112	0	136	0	0	0	0	0	804
5:30 - 5:45	0	318	15	1	334	78	290	0	1	369	21	0	116	0	137	0	0	0	0	0	840
5:45 - 6:00	0	321	11	1	333	65	282	0	0	347	10	0	118	0	128	0	0	0	0	0	808
6:00 - 6:15	0	339	23	1	363	49	296	0	0	345	14	0	91	0	105	0	0	0	0	0	813
6:15 - 6:30	0	265	7	2	274	53	246	0	0	299	13	0	93	0	106	0	0	0	0	0	679
6:30 - 6:45	0	265	15	1	281	51	225	0	0	276	7	0	70	0	77	0	0	0	0	0	634
6:45 - 7:00	0	217	12	2	231	38	221	0	1	260	7	0	67	0	74	0	0	0	0	0	565
3 Hr Totals	0	3603	150	11	3764	690	3048	0	4	3742	151	0	1236	0	1387	0	0	0	0	0	8893
1 Hr Totals																					
4:00 - 5:00	0	1229	37	1	1267	218	951	0	0	1169	42	0	443	0	485	0	0	0	0	0	2921
4:15 - 5:15	0	1225	46	3	1274	237	987	0	1	1225	41	0	480	0	521	0	0	0	0	0	3020
4:30 - 5:30	0	1284	47	3	1334	257	994	0	2	1253	61	0	479	0	540	0	0	0	0	0	3127
4:45 - 5:45	0	1282	54	3	1339	273	1041	0	3	1317	70	0	476	0	546	0	0	0	0	0	3202
5:00 - 6:00	0	1288	56	4	1348	281	1109	0	3	1393	68	0	472	0	540	0	0	0	0	0	3281
5:15 - 6:15	0	1324	61	3	1388	257	1112	0	2	1371	69	0	437	0	506	0	0	0	0	0	3265
5:30 - 6:30	0	1243	56	5	1304	245	1114	0	1	1360	58	0	418	0	476	0	0	0	0	0	3140
5:45 - 6:45	0	1190	56	5	1251	218	1049	0	0	1267	44	0	372	0	416	0	0	0	0	0	2934
6:00 - 7:00	0	1086	57	6	1149	191	988	0	1	1180	41	0	321	0	362	0	0	0	0	0	2691
PEAK HOUR																					
5:00 - 6:00	0	1288	56	4	1348	281	1109	0	3	1393	68	0	472	0	540	0	0	0	0	0	3281



MD 410 & Ellin Rd

Write a description for your map.

200 ft

TOTALS TURNING MOVEMENT COUNT - SUMMARY

Counted by: VCU

Intersection of: Garden City Drive
and: Parking Access

Date: June 9, 2016

Thursday




Location: Prince George's County, Maryland

Weather: Sunny/Warm

Entered by: RH

Star Rating: 5

TIME	TRAFFIC FROM NORTH					TRAFFIC FROM SOUTH					TRAFFIC FROM EAST					TRAFFIC FROM WEST					TOTAL N + S + E + W	
	on: Garden City Drive					on: Garden City Drive					on: Parking Access					on:						
	RIGHT	THRU	LEFT	U-TN	TOTAL	RIGHT	THRU	LEFT	U-TN	TOTAL	RIGHT	THRU	LEFT	U-TN	TOTAL	RIGHT	THRU	LEFT	U-TN	TOTAL		
AM																						
6:30 - 6:45	42	7		49	9	113			122	0	1		1								0	172
6:45 - 7:00	25	7		32	10	142			152	0	0		0								0	184
7:00 - 7:15	31	8		39	9	108			117	0	0		0								0	156
7:15 - 7:30	45	9		54	10	143			153	0	0		0								0	207
7:30 - 7:45	40	10		50	9	183			192	0	0		0								0	242
7:45 - 8:00	34	12		46	12	164			176	0	0		0								0	222
8:00 - 8:15	56	6		62	11	172			183	0	0		0								0	245
8:15 - 8:30	27	13		40	5	154			159	0	1		1								0	200
8:30 - 8:45	46	11		57	8	134			142	0	2		2								0	201
8:45 - 9:00	32	9		41	6	128			134	0	1		1								0	176
9:00 - 9:15	40	5		45	5	88			93	0	0		0								0	138
9:15 - 9:30	39	5		44	5	75			80	0	0		0								0	124
3 Hr Totals	0	457	102	0	559	99	1604	0	0	1703	0	0	5	0	5	0	0	0	0	0	2267	
1 Hr Totals																						
6:30 - 7:30	0	143	31	0	174	38	506	0	0	544	0	0	1	0	1	0	0	0	0	0	719	
6:45 - 7:45	0	141	34	0	175	38	576	0	0	614	0	0	0	0	0	0	0	0	0	0	789	
7:00 - 8:00	0	150	39	0	189	40	598	0	0	638	0	0	0	0	0	0	0	0	0	0	827	
7:15 - 8:15	0	175	37	0	212	42	662	0	0	704	0	0	0	0	0	0	0	0	0	0	916	
7:30 - 8:30	0	157	41	0	198	37	673	0	0	710	0	0	1	0	1	0	0	0	0	0	909	
7:45 - 8:45	0	163	42	0	205	36	624	0	0	660	0	0	3	0	3	0	0	0	0	0	868	
8:00 - 9:00	0	161	39	0	200	30	588	0	0	618	0	0	4	0	4	0	0	0	0	0	822	
8:15 - 9:15	0	145	38	0	183	24	504	0	0	528	0	0	4	0	4	0	0	0	0	0	715	
8:30 - 9:30	0	157	30	0	187	24	425	0	0	449	0	0	3	0	3	0	0	0	0	0	639	
PEAK HOUR																						
7:15 - 8:15	0	175	37	0	212	42	662	0	0	704	0	0	0	0	0	0	0	0	0	0	916	
PM																						
4:00 - 4:15	97	0		97	0	34			34	1	3		4								0	135
4:15 - 4:30	116	2		118	0	34			34	3	6		9								0	161
4:30 - 4:45	106	0		106	1	40			41	1	8		9								0	156
4:45 - 5:00	123	0		123	1	54			55	6	9		15								0	193
5:00 - 5:15	164	1		165	0	42			42	6	7		13								0	220
5:15 - 5:30	155	1		156	0	50			50	6	15		21								0	227
5:30 - 5:45	138	0		138	0	45			45	3	14		17								0	200
5:45 - 6:00	124	0		124	0	48			48	2	10		12								0	184
6:00 - 6:15	124	2		126	0	46			46	3	16		19								0	191
6:15 - 6:30	97	1		98	0	27			27	8	17		25								0	150
6:30 - 6:45	108	0		108	0	47			47	2	15		17								0	172
6:45 - 7:00	101	0		101	1	54			55	2	7		9								0	165
3 Hr Totals	0	1453	7	0	1460	3	521	0	0	524	43	0	127	0	170	0	0	0	0	0	0	2154
1 Hr Totals																						
4:00 - 5:00	0	442	2	0	444	2	162	0	0	164	11	0	26	0	37	0	0	0	0	0	0	645
4:15 - 5:15	0	509	3	0	512	2	170	0	0	172	16	0	30	0	46	0	0	0	0	0	0	730
4:30 - 5:30	0	548	2	0	550	2	186	0	0	188	19	0	39	0	58	0	0	0	0	0	0	796
4:45 - 5:45	0	580	2	0	582	1	191	0	0	192	21	0	45	0	66	0	0	0	0	0	0	840
5:00 - 6:00	0	581	2	0	583	0	185	0	0	185	17	0	46	0	63	0	0	0	0	0	0	831
5:15 - 6:15	0	541	3	0	544	0	189	0	0	189	14	0	55	0	69	0	0	0	0	0	0	802
5:30 - 6:30	0	483	3	0	486	0	166	0	0	166	16	0	57	0	73	0	0	0	0	0	0	725
5:45 - 6:45	0	453	3	0	456	0	168	0	0	168	15	0	58	0	73	0	0	0	0	0	0	697
6:00 - 7:00	0	430	3	0	433	1	174	0	0	175	15	0	55	0	70	0	0	0	0	0	0	678
PEAK HOUR																						
4:45 - 5:45	0	580	2	0	582	1	191	0	0	192	21	0	45	0	66	0	0	0	0	0	0	840

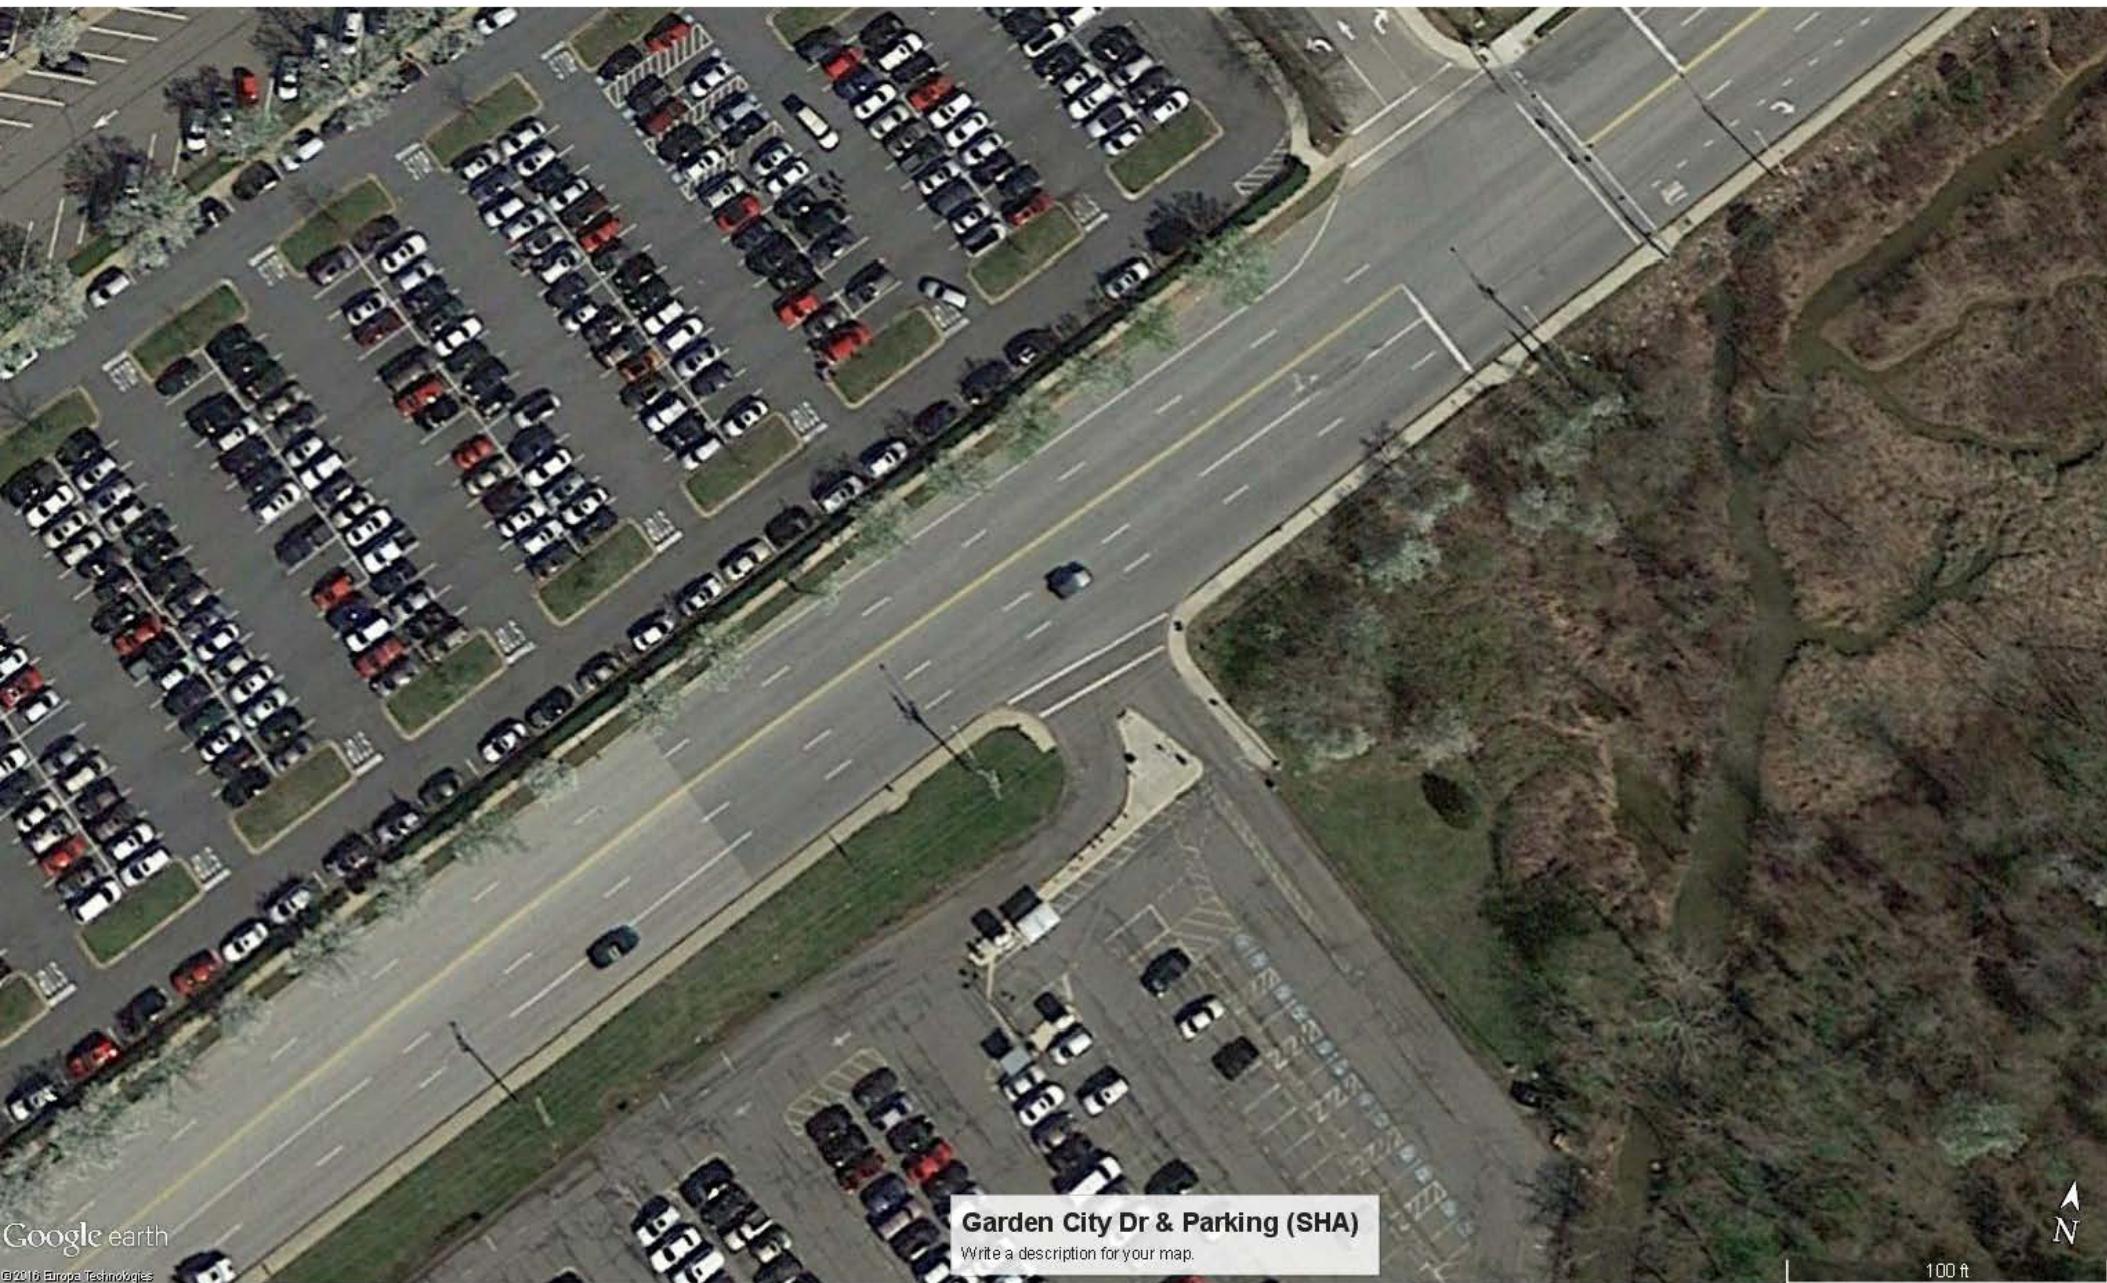

Garden City Dr & Parking (SHA)

Write a description for your map.

100 ft

VEHICLES TURNING MOVEMENT COUNT - SUMMARY


Intersection of: Garden City Drive

Counted by: VCU

and: Parking Lot

Date: May 12, 2016

Thursday


Location: Prince George's, Maryland

Weather: Cloudy/Cool

Entered by: AW

Star Rating: 5

TIME	TRAFFIC FROM NORTH					TRAFFIC FROM SOUTH					TRAFFIC FROM EAST					TRAFFIC FROM WEST					TOTAL N + S + E + W
	on: Garden City Drive					on: Garden City Drive					on:					on: Parking Lot					
	RIGHT	THRU	LEFT	U-TN	TOTAL	RIGHT	THRU	LEFT	U-TN	TOTAL	RIGHT	THRU	LEFT	U-TN	TOTAL	RIGHT	THRU	LEFT	U-TN	TOTAL	
AM																					
6:30 - 6:45	6	72	0	78						0					0	0	0	0	0	78	
6:45 - 7:00	12	76	0	88						0					0	1	0	0	1	89	
7:00 - 7:15	5	77	0	82						0					0	0	0	0	0	82	
7:15 - 7:30	25	74	0	99						0					0	1	1	0	2	101	
7:30 - 7:45	19	105	0	124						0					0	0	0	0	0	124	
7:45 - 8:00	17	102	0	119						0					0	0	0	0	0	119	
8:00 - 8:15	34	94	0	128						0					0	1	0	1	2	130	
8:15 - 8:30	20	89	0	109						0					0	0	1	0	1	110	
8:30 - 8:45	35	77	0	112						0					0	0	0	0	0	112	
8:45 - 9:00	20	65	0	85						0					0	1	0	0	1	86	
9:00 - 9:15	17	68	0	85						0					0	0	0	0	0	85	
9:15 - 9:30	9	62	0	71						0					0	1	0	0	1	72	
3 Hr Totals	219	961	0	0	1180	0	0	0	0	0	0	0	0	0	5	0	2	1	8	1188	
1 Hr Totals																					
6:30 - 7:30	48	299	0	0	347	0	0	0	0	0	0	0	0	0	2	0	1	0	3	350	
6:45 - 7:45	61	332	0	0	393	0	0	0	0	0	0	0	0	0	2	0	1	0	3	396	
7:00 - 8:00	66	358	0	0	424	0	0	0	0	0	0	0	0	0	1	0	1	0	2	426	
7:15 - 8:15	95	375	0	0	470	0	0	0	0	0	0	0	0	0	2	0	1	1	4	474	
7:30 - 8:30	90	390	0	0	480	0	0	0	0	0	0	0	0	0	1	0	1	1	3	483	
7:45 - 8:45	106	362	0	0	468	0	0	0	0	0	0	0	0	0	1	0	1	1	3	471	
8:00 - 9:00	109	325	0	0	434	0	0	0	0	0	0	0	0	0	2	0	1	1	4	438	
8:15 - 9:15	92	299	0	0	391	0	0	0	0	0	0	0	0	0	1	0	1	0	2	393	
8:30 - 9:30	81	272	0	0	353	0	0	0	0	0	0	0	0	0	2	0	0	0	2	355	
PEAK HOUR																					
7:30 - 8:30	90	390	0	0	480	0	0	0	0	0	0	0	0	0	1	0	1	1	3	483	
PM																					
4:00 - 4:15	0	163	0	0	163					0					0	5	0	0	5	168	
4:15 - 4:30	0	219	0	0	219					0					0	5	0	0	5	224	
4:30 - 4:45	0	173	0	0	173					0					0	4	0	0	4	177	
4:45 - 5:00	0	217	0	0	217					0					0	17	1	0	18	235	
5:00 - 5:15	1	245	0	0	246					0					0	10	2	0	12	258	
5:15 - 5:30	0	256	0	0	256					0					0	16	0	0	16	272	
5:30 - 5:45	1	219	0	0	220					0					0	22	0	0	22	242	
5:45 - 6:00	0	203	0	0	203					0					0	19	0	0	19	222	
6:00 - 6:15	0	206	0	0	206					0					0	9	1	0	10	216	
6:15 - 6:30	1	180	0	0	181					0					0	18	1	0	19	200	
6:30 - 6:45	0	180	0	0	180					0					0	18	2	0	20	200	
6:45 - 7:00	1	196	0	0	197					0					0	13	0	0	13	210	
3 Hr Totals	4	2457	0	0	2461	0	0	0	0	0	0	0	0	0	156	0	7	0	163	2624	
1 Hr Totals																					
4:00 - 5:00	0	772	0	0	772	0	0	0	0	0	0	0	0	0	31	0	1	0	32	804	
4:15 - 5:15	1	854	0	0	855	0	0	0	0	0	0	0	0	0	36	0	3	0	39	894	
4:30 - 5:30	1	891	0	0	892	0	0	0	0	0	0	0	0	0	47	0	3	0	50	942	
4:45 - 5:45	2	937	0	0	939	0	0	0	0	0	0	0	0	0	65	0	3	0	68	1007	
5:00 - 6:00	2	923	0	0	925	0	0	0	0	0	0	0	0	0	67	0	2	0	69	994	
5:15 - 6:15	1	884	0	0	885	0	0	0	0	0	0	0	0	0	66	0	1	0	67	952	
5:30 - 6:30	2	808	0	0	810	0	0	0	0	0	0	0	0	0	68	0	2	0	70	880	
5:45 - 6:45	1	769	0	0	770	0	0	0	0	0	0	0	0	0	64	0	4	0	68	838	
6:00 - 7:00	2	762	0	0	764	0	0	0	0	0	0	0	0	0	58	0	4	0	62	826	
PEAK HOUR																					
4:45 - 5:45	2	937	0	0	939	0	0	0	0	0	0	0	0	0	65	0	3	0	68	1007	

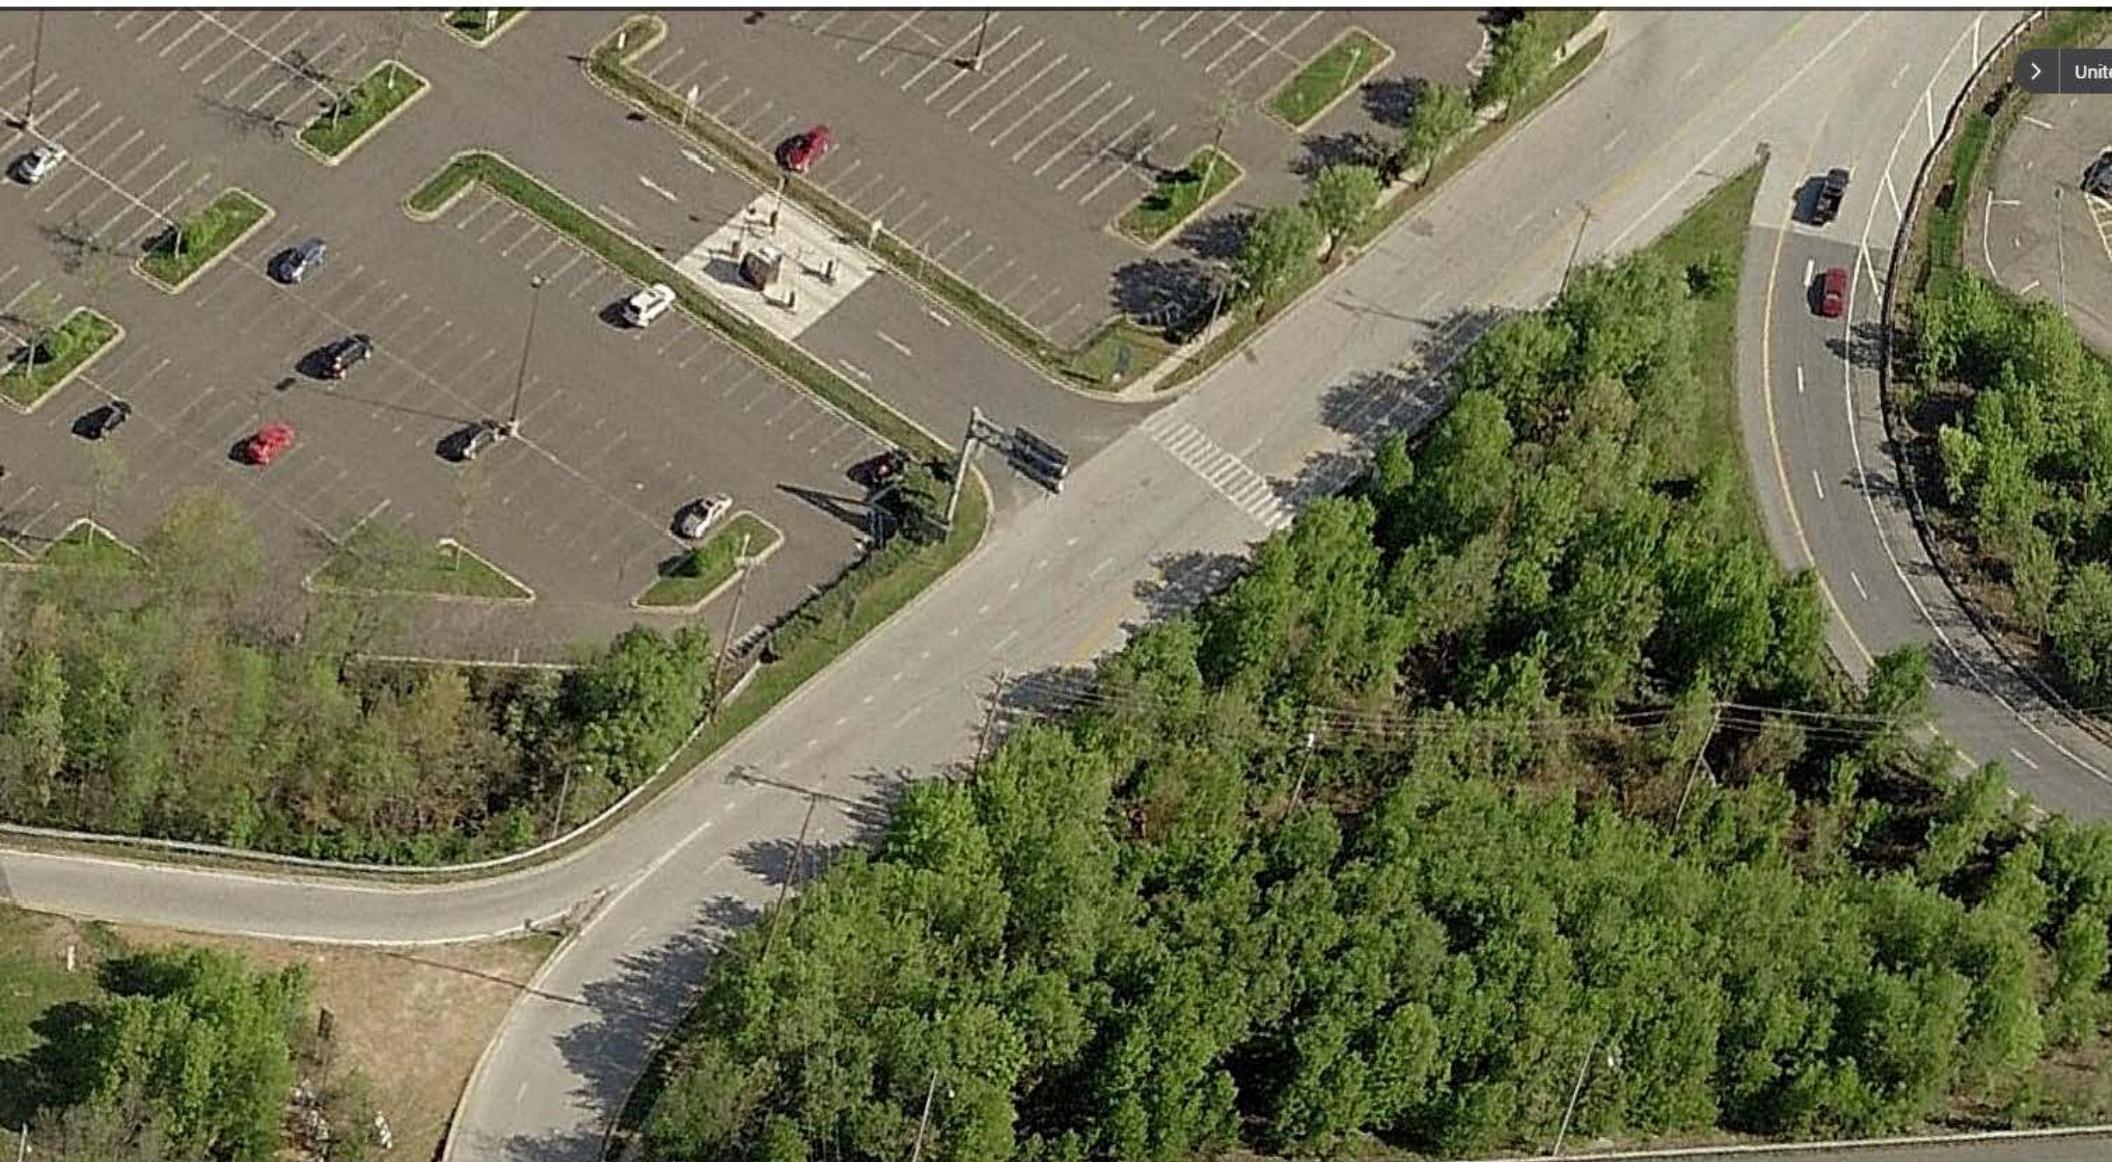


Garden City Dr & Parking Access

APPENDIX B

Intersection Capacity

Analysis Worksheets



CRITICAL LANE VOLUME (CLV) METHODOLOGY

for Prince Georges County

E/W Road: Corporate Drive


N/S Road: Garden City Drive

Conditions: Existing Traffic

Date of Count: 5/12/2016

Day of Week: Thursday

Analyst: Richard Huang

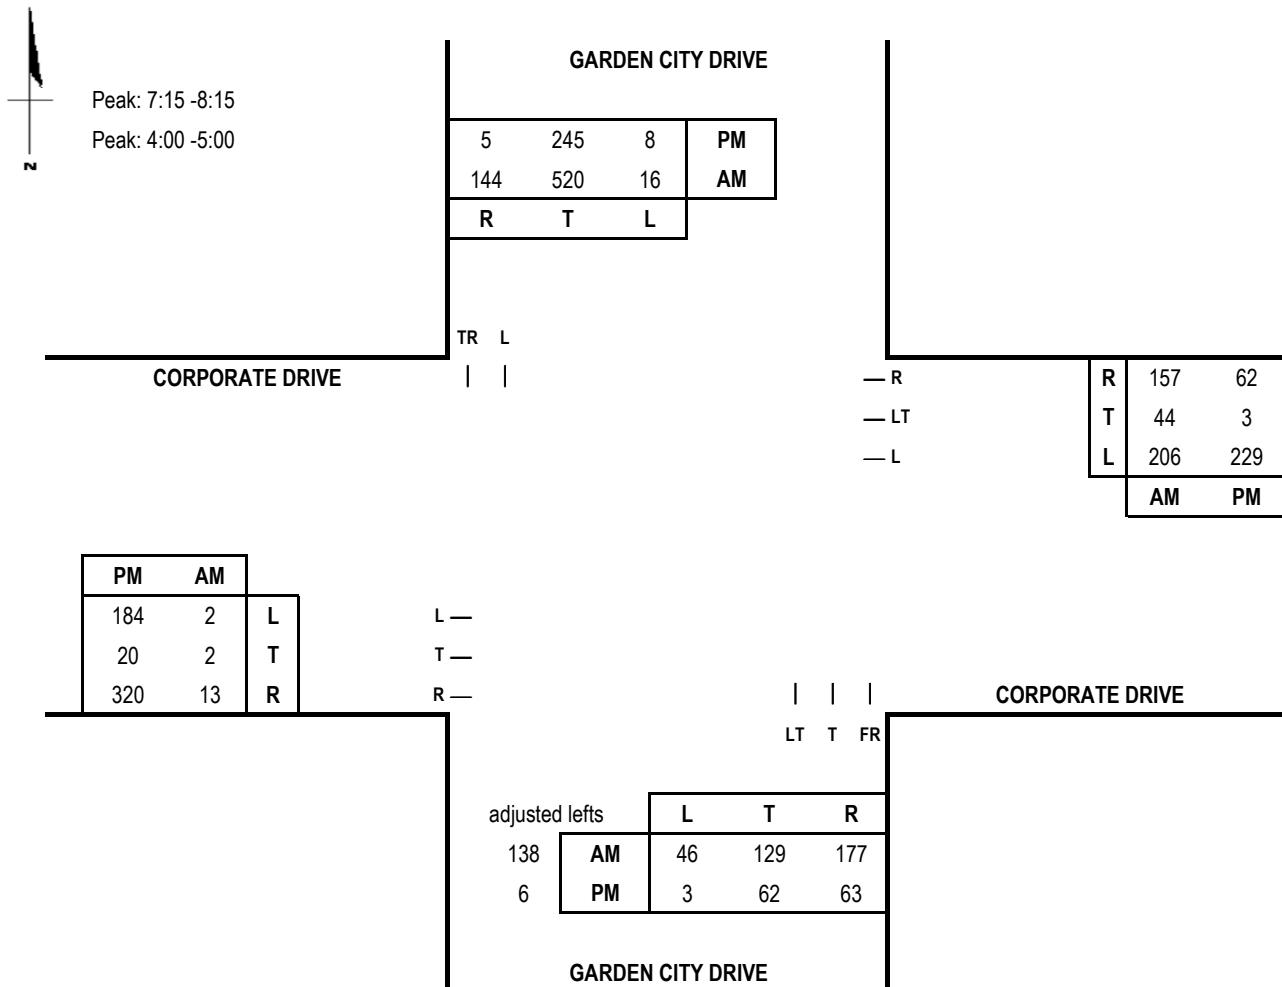

Capacity Analysis - East/West Split

Morning Peak Hour						
Dir	Thru Volumes			+ Opposing Lefts		AM CLV
	VOL	x LUF	= Total	VOL	x LUF	
EB	2	1.00	2			2
WB	250	0.60	150			150
NB	267	0.55	147	16	1.00	16
SB	664	1.00	664	46	1.00	46
CLV TOTAL =				862		
Level of Service (LOS) =				A		

Scenario ID - EXIST2

AM V/C = 0.54

Evening Peak Hour						
Dir	Thru Volumes			+ Opposing Lefts		PM CLV
	VOL	x LUF	= Total	VOL	x LUF	
EB	317	1.00	317			317
WB	232	0.60	139			139
NB	68	0.55	37	8	1.00	8
SB	250	1.00	250	3	1.00	3
CLV TOTAL =				709		
Level of Service (LOS) =				A		
						PM V/C = 0.44

CRITICAL LANE VOLUME (CLV) METHODOLOGY

for Prince Georges County

E/W Road: Corporate Drive


N/S Road: Garden City Drive

Conditions: Background Traffic

Date of Count: 5/12/2016

Day of Week: Thursday

Analyst: Richard Huang

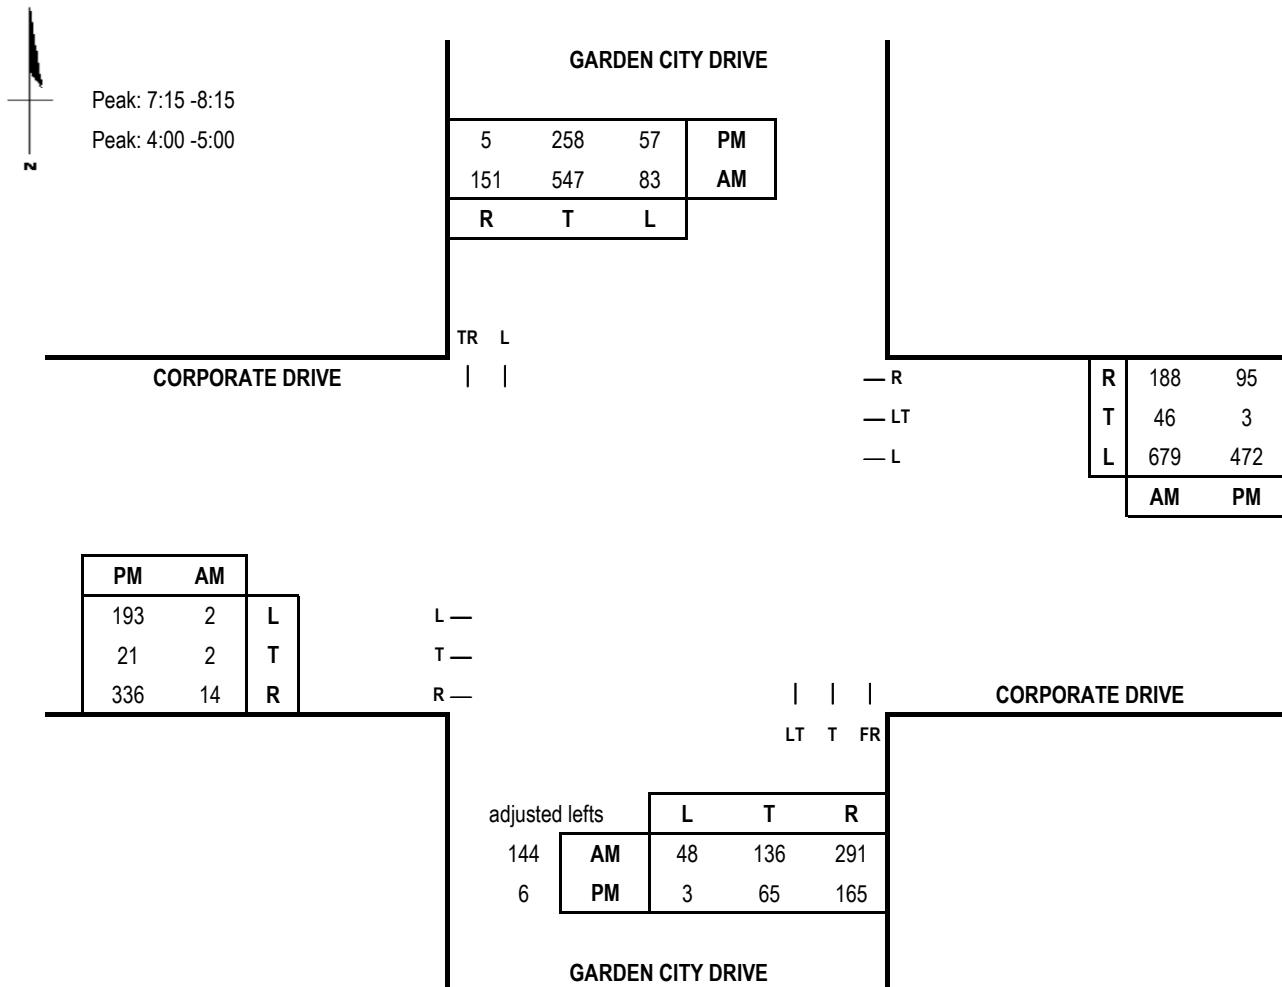

Capacity Analysis - East/West Split

Morning Peak Hour						
Dir	Thru Volumes			+ Opposing Lefts		AM CLV
	VOL	x LUF	= Total	VOL	x LUF	
EB	2	1.00	2			2
WB	725	0.60	435			435
NB	280	0.55	154	83	1.00	83
SB	698	1.00	698	48	1.00	48
CLV TOTAL =				1,183		
Level of Service (LOS) =				C		

Scenario ID - BACK2

AM V/C = 0.74

Evening Peak Hour						
Dir	Thru Volumes			+ Opposing Lefts		PM CLV
	VOL	x LUF	= Total	VOL	x LUF	
EB	333	1.00	333			333
WB	475	0.60	285			285
NB	71	0.55	39	57	1.00	57
SB	263	1.00	263	3	1.00	3
CLV TOTAL =				884		
Level of Service (LOS) =				A		
						PM V/C = 0.55

CRITICAL LANE VOLUME (CLV) METHODOLOGY

for Prince Georges County

E/W Road: Corporate Drive


N/S Road: Garden City Drive

Conditions: Total Traffic

Date of Count: 5/12/2016

Day of Week: Thursday

Analyst: Richard Huang

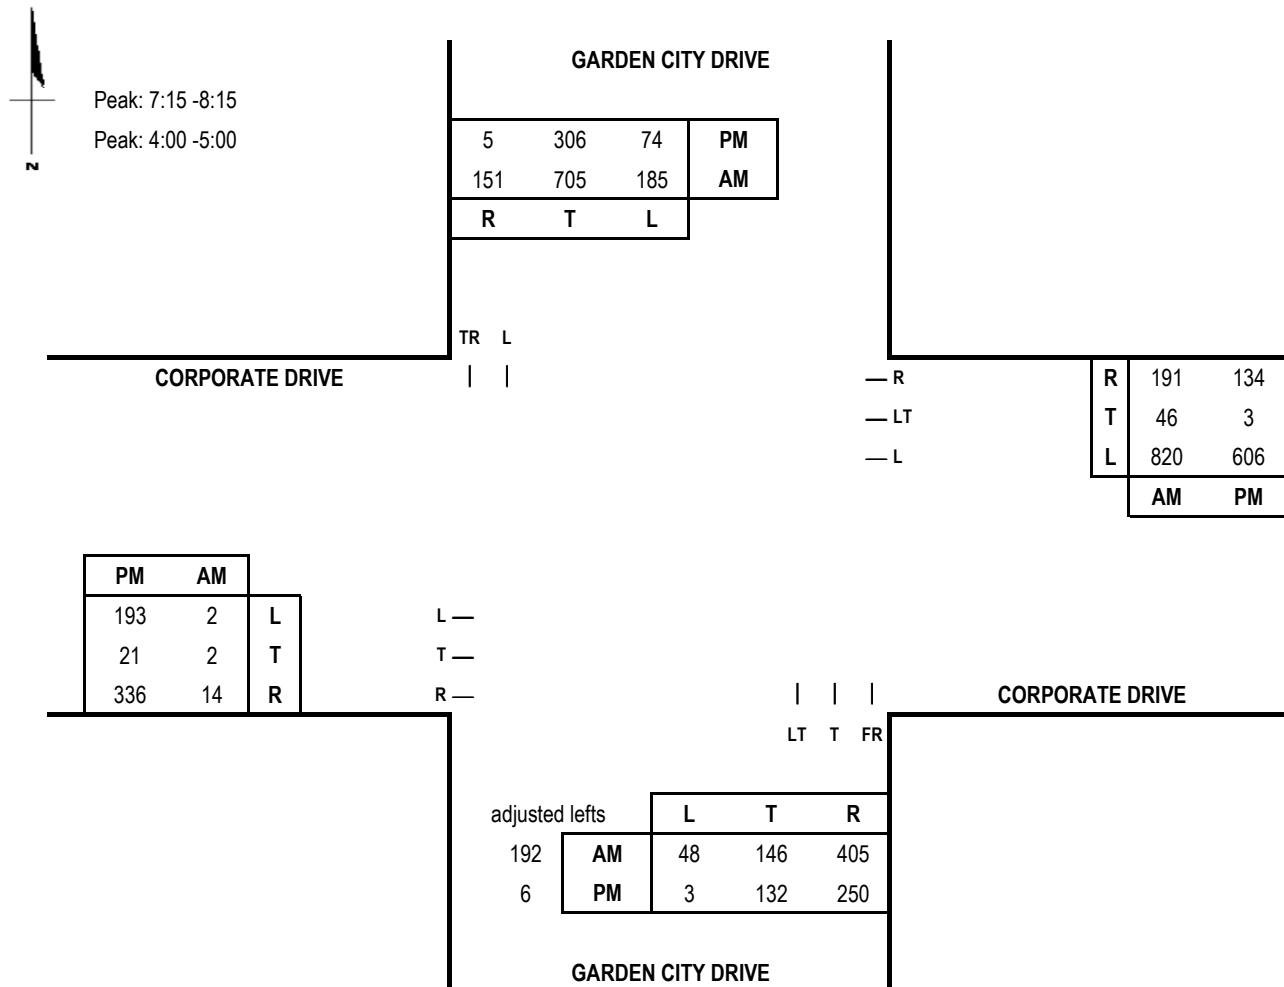

Capacity Analysis - East/West Split

Morning Peak Hour						
Dir	Thru Volumes			+ Opposing Lefts		AM CLV
	VOL	x LUF	= Total	VOL	x LUF	
EB	2	1.00	2			2
WB	866	0.60	520			520
NB	338	0.55	186	185	1.00	185
SB	856	1.00	856	48	1.00	48
CLV TOTAL =				1,426		
Level of Service (LOS) =				D		

Scenario ID - TOT2

AM V/C = 0.89

Evening Peak Hour						
Dir	Thru Volumes			+ Opposing Lefts		PM CLV
	VOL	x LUF	= Total	VOL	x LUF	
EB	333	1.00	333			333
WB	609	0.60	365			365
NB	138	0.55	76	74	1.00	74
SB	311	1.00	311	3	1.00	3
CLV TOTAL =				1,012		
Level of Service (LOS) =				B		
						PM V/C = 0.63

CRITICAL LANE VOLUME (CLV) METHODOLOGY

for Prince Georges County


E/W Road: Corporate Drive

Date of Count: 5/12/2016

N/S Road: Garden City Drive

Day of Week: Thursday

Conditions: Total w/SB 2 Lanes

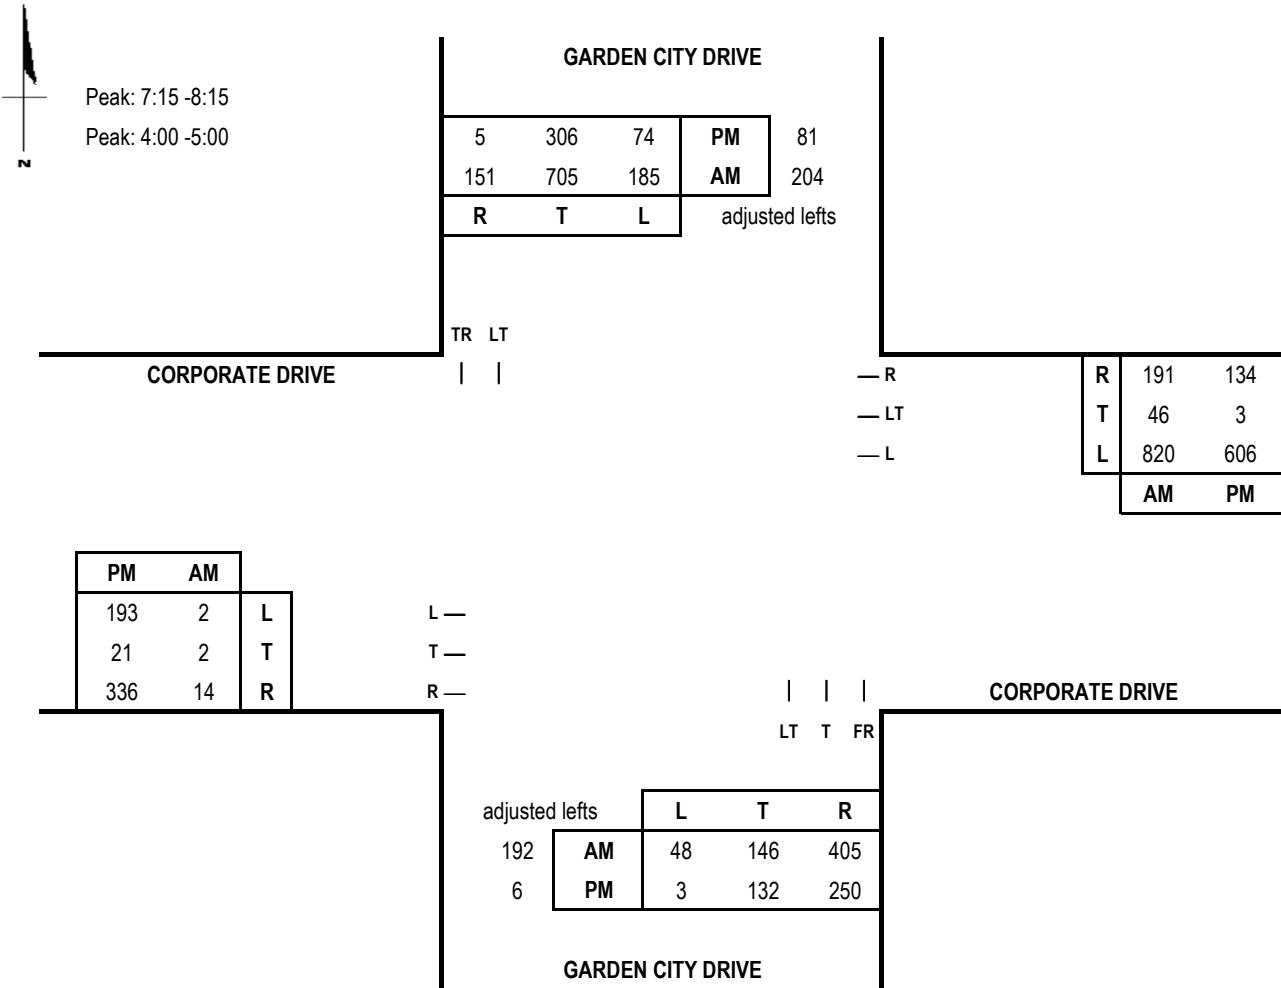

Capacity Analysis - East/West Split

Morning Peak Hour						
Dir	Thru Volumes			+ Opposing Lefts		AM CLV
	VOL	x LUF	= Total	VOL	x LUF	
EB	2	1.00	2			2
WB	866	0.60	520			520
NB	338	0.55	186	185	1.00	185
SB	1060	0.55	583	48	1.00	48
CLV TOTAL=				1,153		
Level of Service (LOS)=				C		
AM V/C =0.72						

Evening Peak Hour						
Dir	Thru Volumes			+ Opposing Lefts		PM CLV
	VOL	x LUF	= Total	VOL	x LUF	
EB	333	1.00	333			333
WB	609	0.60	365			365
NB	138	0.55	76	74	1.00	74
SB	392	0.55	216	3	1.00	3
CLV TOTAL=				917		
Level of Service (LOS)=				A		
PM V/C =0.57						

CRITICAL LANE VOLUME (CLV) METHODOLOGY

for Prince Georges County

E/W Road Name: Parking Access

Date of Count: 5/12/2016

N/S Road Name: Garden City Drive

Day of Count: Thursday

Conditions: Existing Traffic

Analyst: Richard Huang



AM Peak: 07:30-8:30

PM Peak: 04:00-5:00

GARDEN CITY DRIVE


218	583	PM
489	212	AM

R T

R T T

| | |

PARKING ACCESS



| | |
L T T

	L	T
AM	308	354
PM	70	132

GARDEN CITY DRIVE

Capacity Analysis

Morning Peak Hour						
Dir	Thru Volumes		+ Opposing Lefts		AM CLV	
	VOL	x LUF	= Total	VOL	x LUF = Total	
EB	0	0.00	0			0
NB	354	0.55	195			797
SB	489	1.00	489	308	1.00 308	
CLV TOTAL =				797		
Level of Service (LOS) =				A		

Scenario ID - EXIST3

CLV V/C = 0.5

Evening Peak Hour						
Dir	Thru Volumes		+ Opposing Lefts		PM CLV	
	VOL	x LUF	= Total	VOL	x LUF = Total	
EB	0	0.00	0			0
NB	132	0.55	73			391
SB	583	0.55	321	70	1.00 70	
CLV TOTAL =				391		
Level of Service (LOS) =				A		
CLV V/C = 0.24						

CRITICAL LANE VOLUME (CLV) METHODOLOGY

for Prince Georges County

E/W Road Name: Parking Access
N/S Road Name: Garden City Drive
Conditions: Background Traffic

Date of Count: 5/12/2016
Day of Count: Thursday
Analyst: Richard Huang




AM Peak: 07:30-8:30
PM Peak: 04:00-5:00

GARDEN CITY DRIVE

229	844	PM
514	685	AM
R	T	

R T T
| | |

PARKING ACCESS



| | |
L T T

AM	L	T
PM	324	477
	74	238

GARDEN CITY DRIVE

Capacity Analysis

Morning Peak Hour						
Dir	Thru Volumes		+ Opposing Lefts		AM CLV	
	VOL	x LUF	= Total	VOL	x LUF = Total	
EB	0	0.00	0			0
NB	477	0.55	262			838
SB	514	1.00	514	324	1.00 324	
CLV TOTAL =				838		
Level of Service (LOS) =				A		

Scenario ID - BACK3

CLV V/C = 0.52

Evening Peak Hour						
Dir	Thru Volumes		+ Opposing Lefts		PM CLV	
	VOL	x LUF	= Total	VOL	x LUF = Total	
EB	0	0.00	0			0
NB	238	0.55	131			538
SB	844	0.55	464	74	1.00 74	
CLV TOTAL =				538		
Level of Service (LOS) =				A		
CLV V/C =				0.34		

CRITICAL LANE VOLUME (CLV) METHODOLOGY

for Prince Georges County



E/W Road Name: Parking Access

Date of Count: 5/12/2016

N/S Road Name: Garden City Drive

Day of Count: Thursday

Conditions: Total Traffic

Analyst: Richard Huang



AM Peak: 07:30-8:30

PM Peak: 04:00-5:00

GARDEN CITY DRIVE

324	931	PM
742	756	AM
R	T	

R T T
| | |

PARKING ACCESS

PM	AM
47	12
29	7

L ——
R ——

| | |
L T T

		L	T
AM	447	588	
PM	122	342	

GARDEN CITY DRIVE

Capacity Analysis

Morning Peak Hour						
Dir	Thru Volumes			+ Opposing Lefts		AM CLV
	VOL	x LUF	= Total	VOL	x LUF	
EB	12	1.00	12			12
NB	588	0.55	323			1177
SB	730	1.00	730	447	1.00	447
CLV TOTAL =				1,189		
Level of Service (LOS) =						
CLV V/C = 0.74						

Evening Peak Hour						
Dir	Thru Volumes			+ Opposing Lefts		PM CLV
	VOL	x LUF	= Total	VOL	x LUF	
EB	47	1.00	47			47
NB	342	0.55	188			634
SB	931	0.55	512	122	1.00	122
CLV TOTAL =				681		
Level of Service (LOS) =						
CLV V/C = 0.43						

CRITICAL LANE VOLUME (CLV) METHODOLOGY

for Prince Georges County

E/W Road Name: Parking Access

Date of Count: 5/12/2016

N/S Road Name: Garden City Drive

Day of Count: Thursday

Conditions: Total Traffic

Analyst: Richard Huang



AM Peak: 07:30-8:30

PM Peak: 04:00-5:00

GARDEN CITY DRIVE

324	931	PM
742	756	AM
R	T	

**PARKING ACCESS**

Visim Lane Use

PM	AM	L
47	12	L
29	7	R

L ——
R ——



AM	L	T
447	588	
PM	122	342

GARDEN CITY DRIVE**Capacity Analysis**

Morning Peak Hour						
Dir	Thru Volumes			+ Opposing Lefts		AM CLV
	VOL	x LUF	= Total	VOL	x LUF	
EB	12	1.00	12			12
NB	588	0.55	323			1092
SB	1498	0.55	824	447	0.60	268
CLV TOTAL=				1,104		


Level of Service (LOS) = **B**
CLV V/C = 0.69

Evening Peak Hour						
Dir	Thru Volumes			+ Opposing Lefts		PM CLV
	VOL	x LUF	= Total	VOL	x LUF	
EB	47	1.00	47			47
NB	342	0.55	188			763
SB	1255	0.55	690	122	0.60	73
CLV TOTAL=				810		

Level of Service (LOS) = **A**
CLV V/C = 0.51

CRITICAL LANE VOLUME (CLV) METHODOLOGY

for Prince Georges County

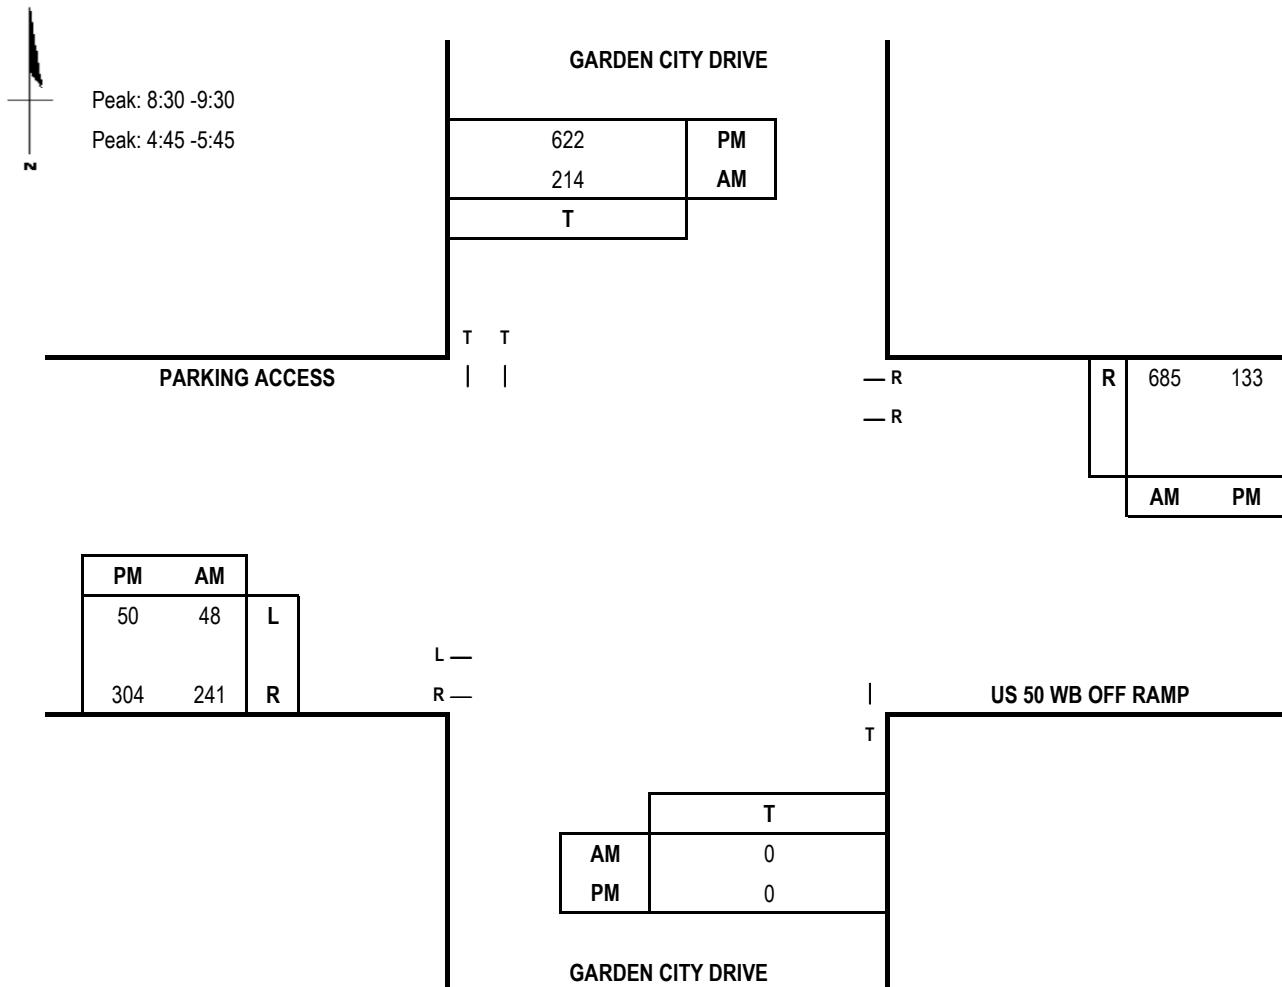E/W Road: US 50 WB Off Ramp/Parking Access**Date of Count:** 5/12/2016**N/S Road:** Garden City Drive**Day of Week:** Thursday**Conditions:** Existing Traffic**Analyst:** Richard Huang**Capacity Analysis - East/West Split**

Morning Peak Hour						
Dir	Thru Volumes			+ Opposing Lefts		AM CLV
	VOL	x LUF	= Total	VOL	x LUF	
EB	241	1.00	241			241
WB	685	0.55	377			377
NB	0	1.00	0	0	0.00	0
SB	214	0.55	118	0	0.00	0
CLV TOTAL =				736		
Level of Service (LOS) =				A		


Scenario ID - EXIST4

AM V/C = 0.46

Evening Peak Hour						
Dir	Thru Volumes			+ Opposing Lefts		PM CLV
	VOL	x LUF	= Total	VOL	x LUF	
EB	304	1.00	304			304
WB	133	0.55	73			73
NB	0	1.00	0	0	0.00	0
SB	622	0.55	342	0	0.00	0
CLV TOTAL =				719		
Level of Service (LOS) =				A		
PM V/C = 0.45						

CRITICAL LANE VOLUME (CLV) METHODOLOGY

for Prince Georges County

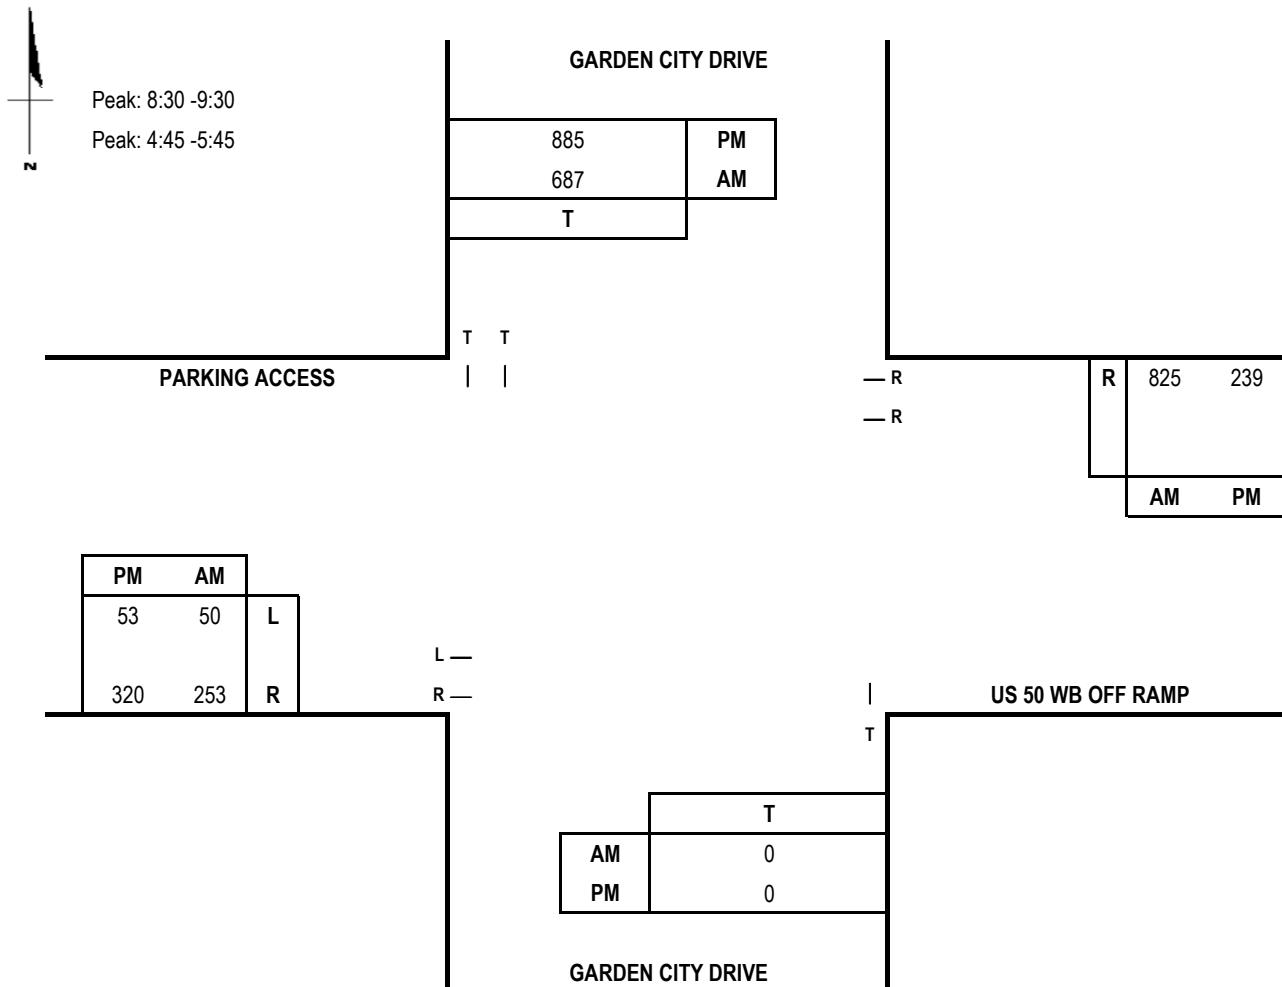E/W Road: US 50 WB Off Ramp/Parking Access**Date of Count:** 5/12/2016**N/S Road:** Garden City Drive**Day of Week:** Thursday**Conditions:** Background Traffic**Analyst:** Richard Huang**Capacity Analysis - East/West Split**

Morning Peak Hour						
Dir	Thru Volumes			+ Opposing Lefts		AM CLV
	VOL	x LUF	= Total	VOL	x LUF	
EB	253	1.00	253			253
WB	825	0.55	454			454
NB	0	1.00	0	0	0.00	0
SB	687	0.55	378	0	0.00	0
CLV TOTAL =				1,085		
Level of Service (LOS) =				B		

Scenario ID - BACK4

AM V/C = 0.68

CLV TOTAL = 938

Level of Service (LOS) = A

PM V/C = 0.59

Evening Peak Hour						
Dir	Thru Volumes			+ Opposing Lefts		PM CLV
	VOL	x LUF	= Total	VOL	x LUF	
EB	320	1.00	320			320
WB	239	0.55	131			131
NB	0	1.00	0	0	0.00	0
SB	885	0.55	487	0	0.00	0
CLV TOTAL =				938		
Level of Service (LOS) =				A		

CRITICAL LANE VOLUME (CLV) METHODOLOGY

for Prince Georges County

E/W Road: US 50 WB Off Ramp/Parking Access


Date of Count: 5/12/2016

N/S Road: Garden City Drive

Day of Week: Thursday

Conditions: Total Traffic

Analyst: Richard Huang

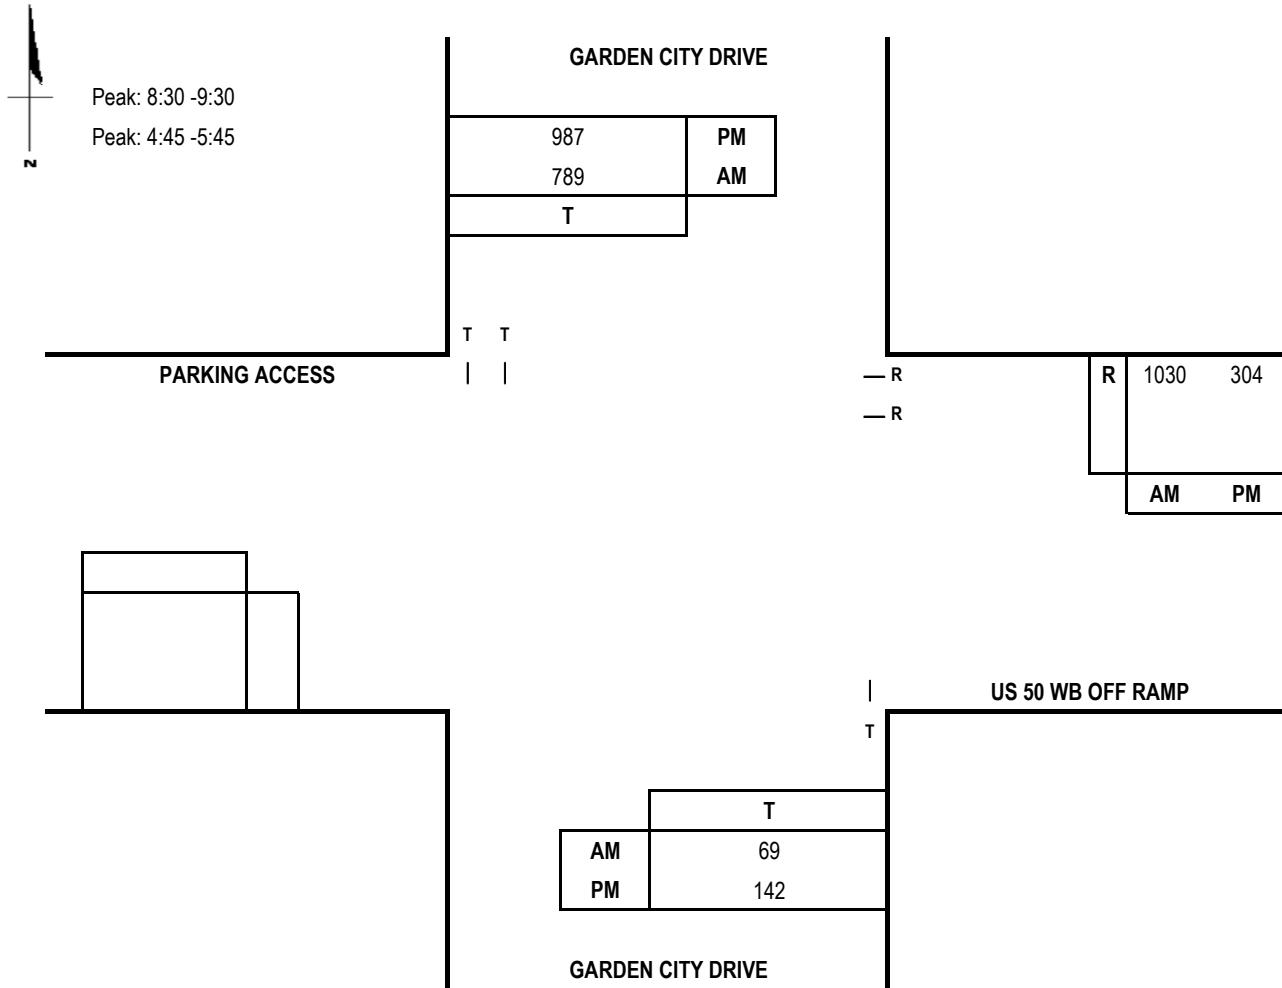

Capacity Analysis - East/West Split

Morning Peak Hour							
Dir	Thru Volumes		+ Opposing Lefts		AM CLV		
	VOL	x LUF	= Total	VOL	x LUF	= Total	
EB	0	0.00	0			0	
WB	1030	0.55	567			567	
NB	69	1.00	69	0	0.00	0	434
SB	789	0.55	434	0	0.00	0	

CLV TOTAL= 1,001

Level of Service (LOS)= B

AM V/C = 0.63

Evening Peak Hour							
Dir	Thru Volumes		+ Opposing Lefts		PM CLV		
	VOL	x LUF	= Total	VOL	x LUF	= Total	
EB	0	0.00	0			0	
WB	304	0.55	167			167	
NB	142	1.00	142	0	0.00	0	543
SB	987	0.55	543	0	0.00	0	

CLV TOTAL= 710

Level of Service (LOS)= A

PM V/C = 0.44

CRITICAL LANE VOLUME (CLV) METHODOLOGY

for Prince Georges County


E/W Road: US 50 EB On Ramp/Parking Access Date of Count: 5/19/2016

N/S Road: Ardwick Ardmore Rd

Day of Count: Thursday

Conditions: Existing Traffic

Analyst: Richard Huang

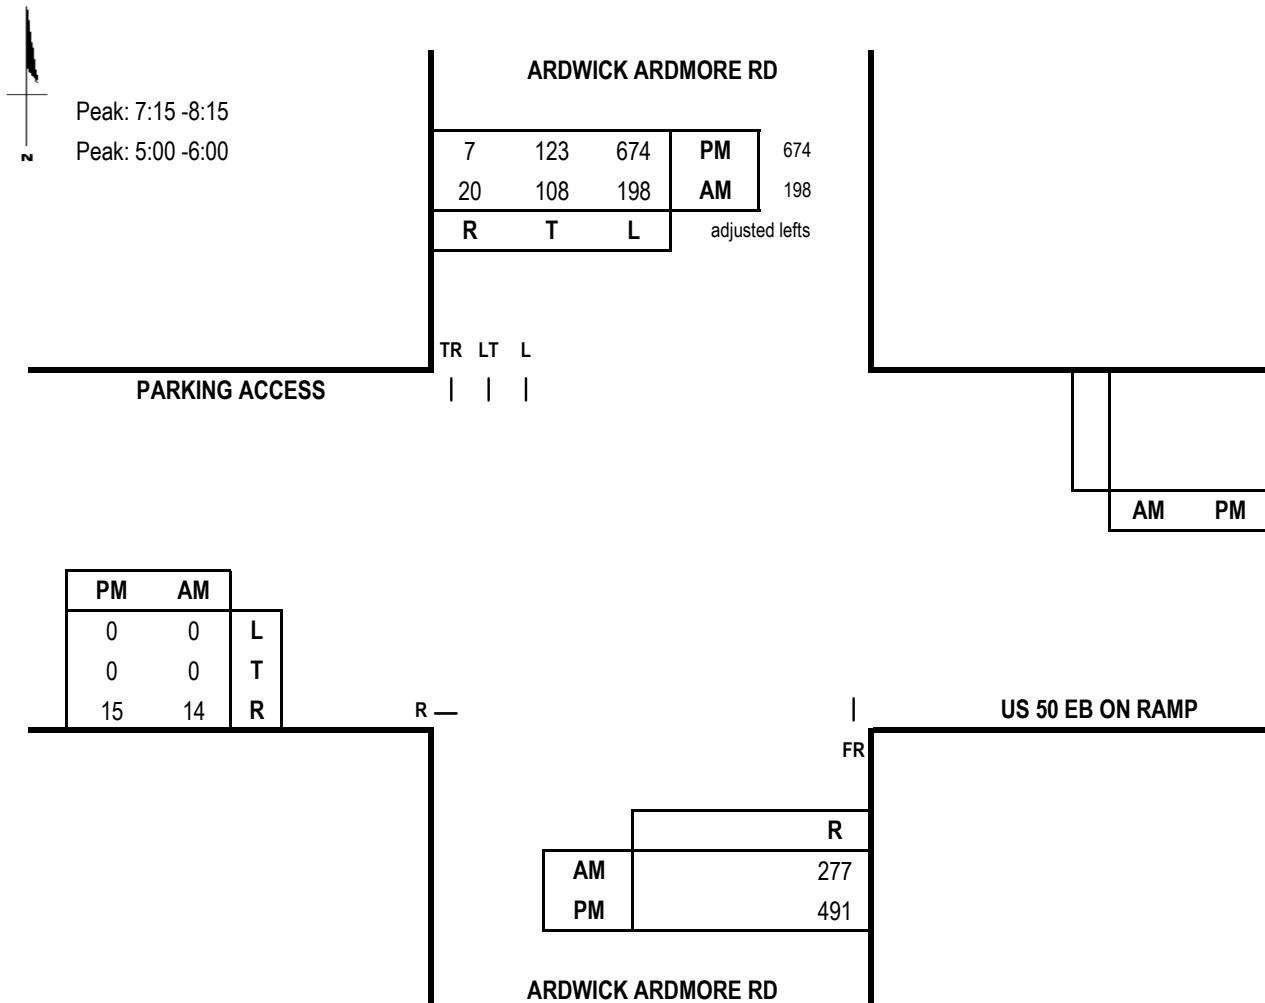

Capacity Analysis

Morning Peak Hour						
Dir	Thru Volumes			+ Opposing Lefts		AM CLV
	VOL	x LUF	= Total	VOL	x LUF	
NB	0	0.00	0	198	0.60	119
SB	326	0.55	179	0	0.00	0
EB	14	1.00	14	0	0.00	0
WB	0	0.00	0	0	0.00	0
CLV TOTAL=				193		
Level of Service (LOS)=				A		

Scenario ID - EXIST6

AM V/C = 0.12

PM V/C = 0.29

Evening Peak Hour						
Dir	Thru Volumes			+ Opposing Lefts		PM CLV
	VOL	x LUF	= Total	VOL	x LUF	
NB	0	0.00	0	674	0.60	404
SB	804	0.55	442	0	0.00	0
EB	15	1.00	15	0	0.00	0
WB	0	0.00	0	0	0.00	0
CLV TOTAL=				457		
Level of Service (LOS)=				A		

CRITICAL LANE VOLUME (CLV) METHODOLOGY

for Prince Georges County


E/W Road: US 50 EB On Ramp/Parking Access Date of Count: 5/19/2016

N/S Road: Ardwick Ardmore Rd

Conditions: Background Traffic

Day of Count: Thursday

Analyst: Richard Huang

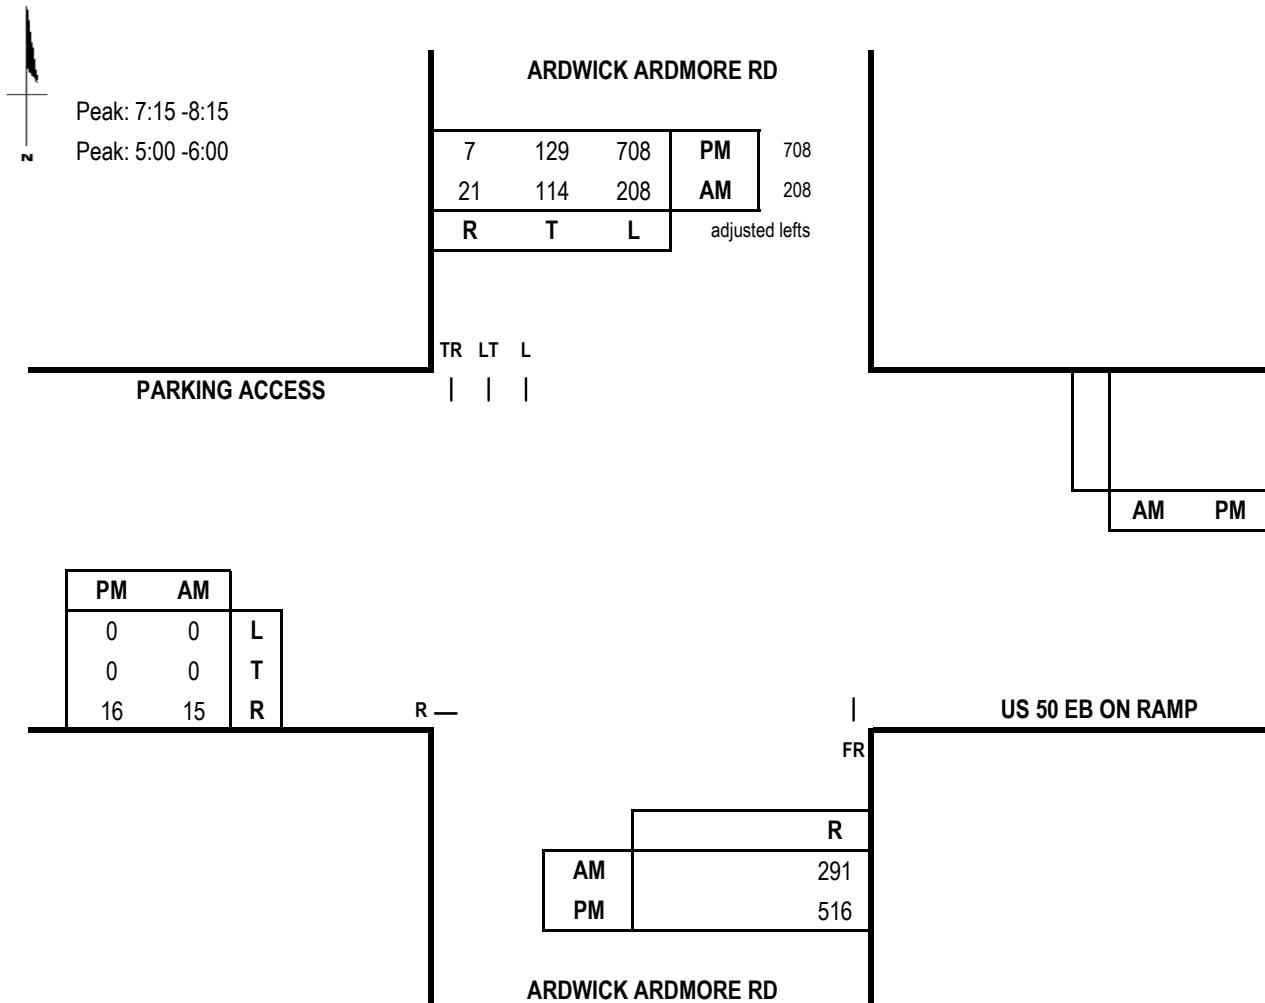

Capacity Analysis

Morning Peak Hour						
Dir	Thru Volumes			+ Opposing Lefts		AM CLV
	VOL	x LUF	= Total	VOL	x LUF	
NB	0	0.00	0	208	0.60	125
SB	343	0.55	189	0	0.00	0
EB	15	1.00	15	0	0.00	0
WB	0	0.00	0	0	0.00	0
CLV TOTAL=				204		
Level of Service (LOS)=				A		

Scenario ID - BACK6

AM V/C = 0.13

Evening Peak Hour						
Dir	Thru Volumes			+ Opposing Lefts		PM CLV
	VOL	x LUF	= Total	VOL	x LUF	
NB	0	0.00	0	708	0.60	425
SB	844	0.55	464	0	0.00	0
EB	16	1.00	16	0	0.00	0
WB	0	0.00	0	0	0.00	0
CLV TOTAL=				480		
Level of Service (LOS)=				A		

PM V/C = 0.3

CRITICAL LANE VOLUME (CLV) METHODOLOGY

for Prince Georges County


E/W Road: US 50 EB On Ramp/Parking Access Date of Count: 5/19/2016

N/S Road: Ardwick Ardmore Rd

Conditions: Total Traffic

Day of Count: Thursday

Analyst: Richard Huang

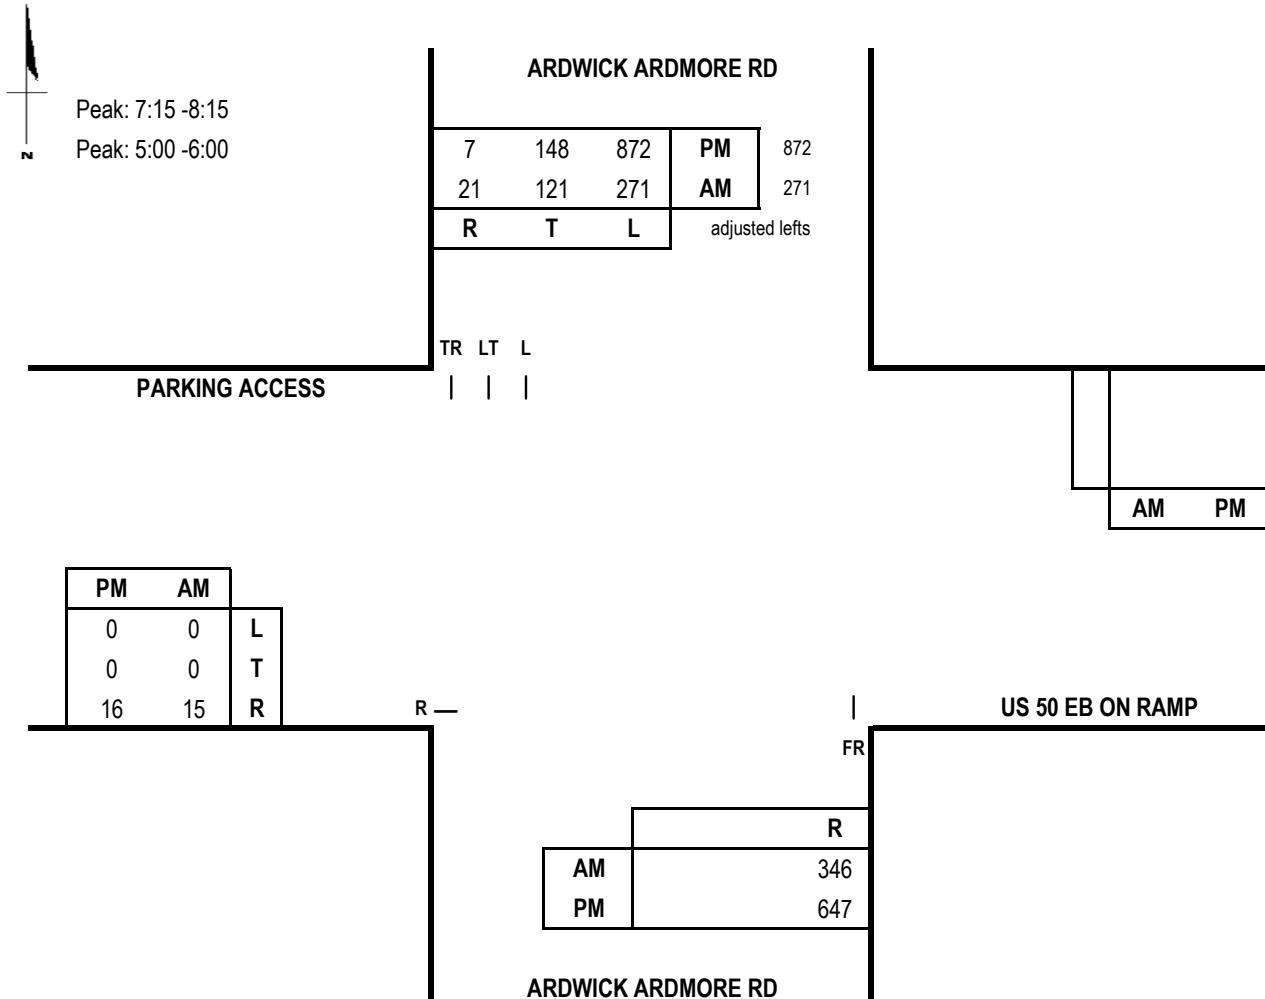

Capacity Analysis

Morning Peak Hour						
Dir	Thru Volumes			+ Opposing Lefts		AM CLV
	VOL	x LUF	= Total	VOL	x LUF	
NB	0	0.00	0	271	0.60	163
SB	413	0.55	227	0	0.00	0
EB	15	1.00	15	0	0.00	0
WB	0	0.00	0	0	0.00	0
CLV TOTAL =				242		
Level of Service (LOS) =				A		

Scenario ID - TOT6

AM V/C = 0.15

Evening Peak Hour						
Dir	Thru Volumes			+ Opposing Lefts		PM CLV
	VOL	x LUF	= Total	VOL	x LUF	
NB	0	0.00	0	872	0.60	523
SB	1027	0.55	565	0	0.00	0
EB	16	1.00	16	0	0.00	0
WB	0	0.00	0	0	0.00	0
CLV TOTAL =				581		
Level of Service (LOS) =				A		

PM V/C = 0.36

CRITICAL LANE VOLUME (CLV) METHODOLOGY

for Prince Georges County

E/W Road: Ardwick Ardmore Road


Date of Count: 5/19/2016

N/S Road: Pennsy Drive

Day of Count: Thursday

Conditions: Existing Traffic

Analyst: Richard Huang

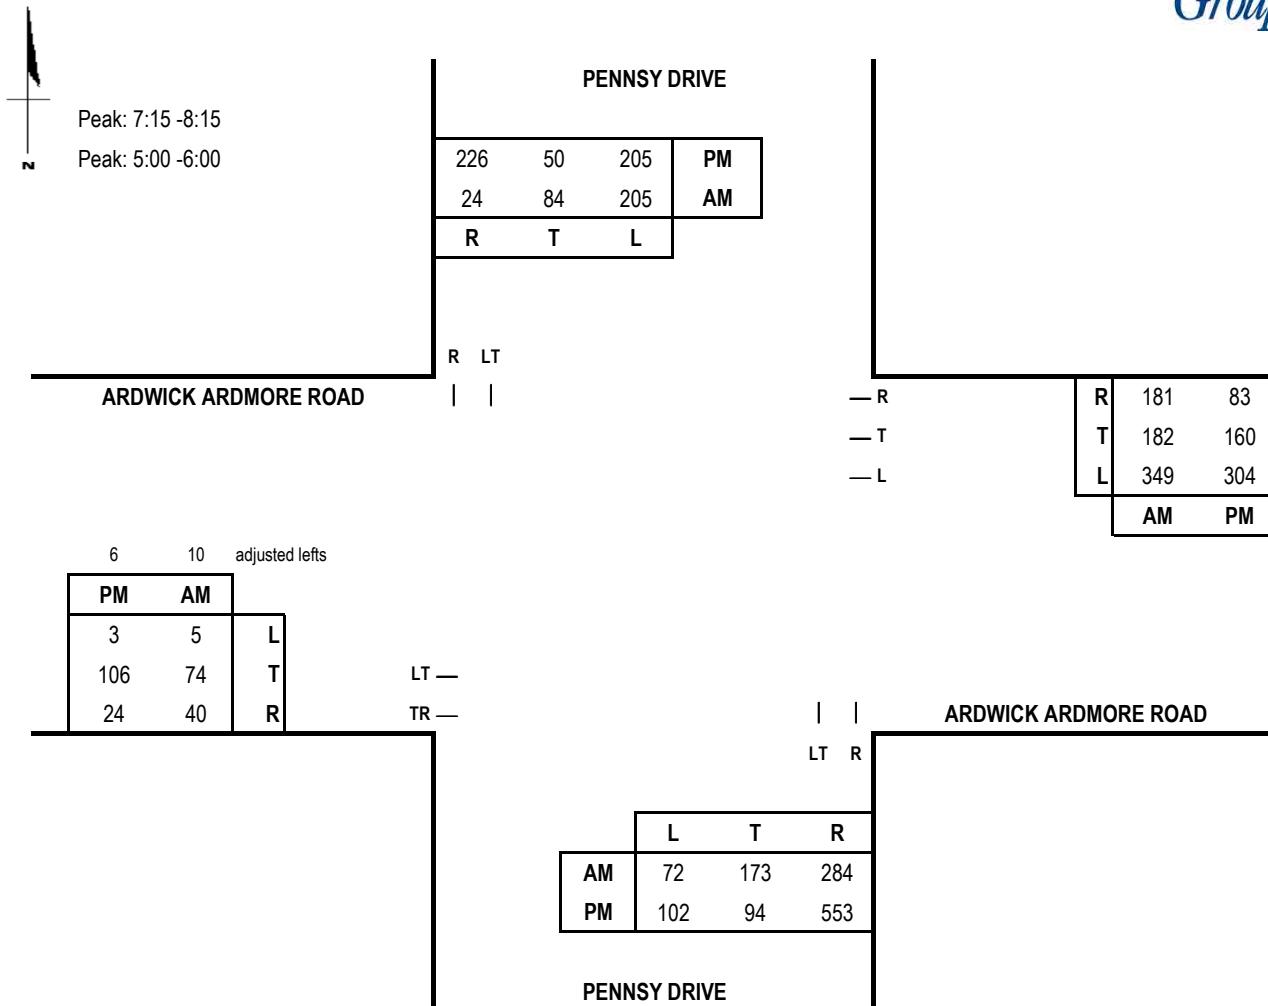

Capacity Analysis - North/South Split

Morning Peak Hour						
Dir	Thru Volumes			+ Opposing Lefts		AM CLV
	VOL	x LUF	= Total	VOL	x LUF	
NB	245	1.00	245			245
SB	289	1.00	289			289
EB	124	0.55	68	349	1.00	349
WB	182	1.00	182	5	1.00	5
CLV TOTAL =				951		
Level of Service (LOS) =				A		

Scenario ID - EXIST7

AM V/C = 0.59

Evening Peak Hour						
Dir	Thru Volumes			+ Opposing Lefts		PM CLV
	VOL	x LUF	= Total	VOL	x LUF	
NB	249	1.00	249			249
SB	255	1.00	255			255
EB	136	0.55	75	304	1.00	304
WB	160	1.00	160	3	1.00	3
CLV TOTAL =				883		
Level of Service (LOS) =				A		
PM V/C = 0.55						

CRITICAL LANE VOLUME (CLV) METHODOLOGY

for Prince Georges County

E/W Road: Ardwick Ardmore Road


Date of Count: 5/19/2016

N/S Road: Pennsy Drive

Day of Count: Thursday

Conditions: Background Traffic

Analyst: Richard Huang

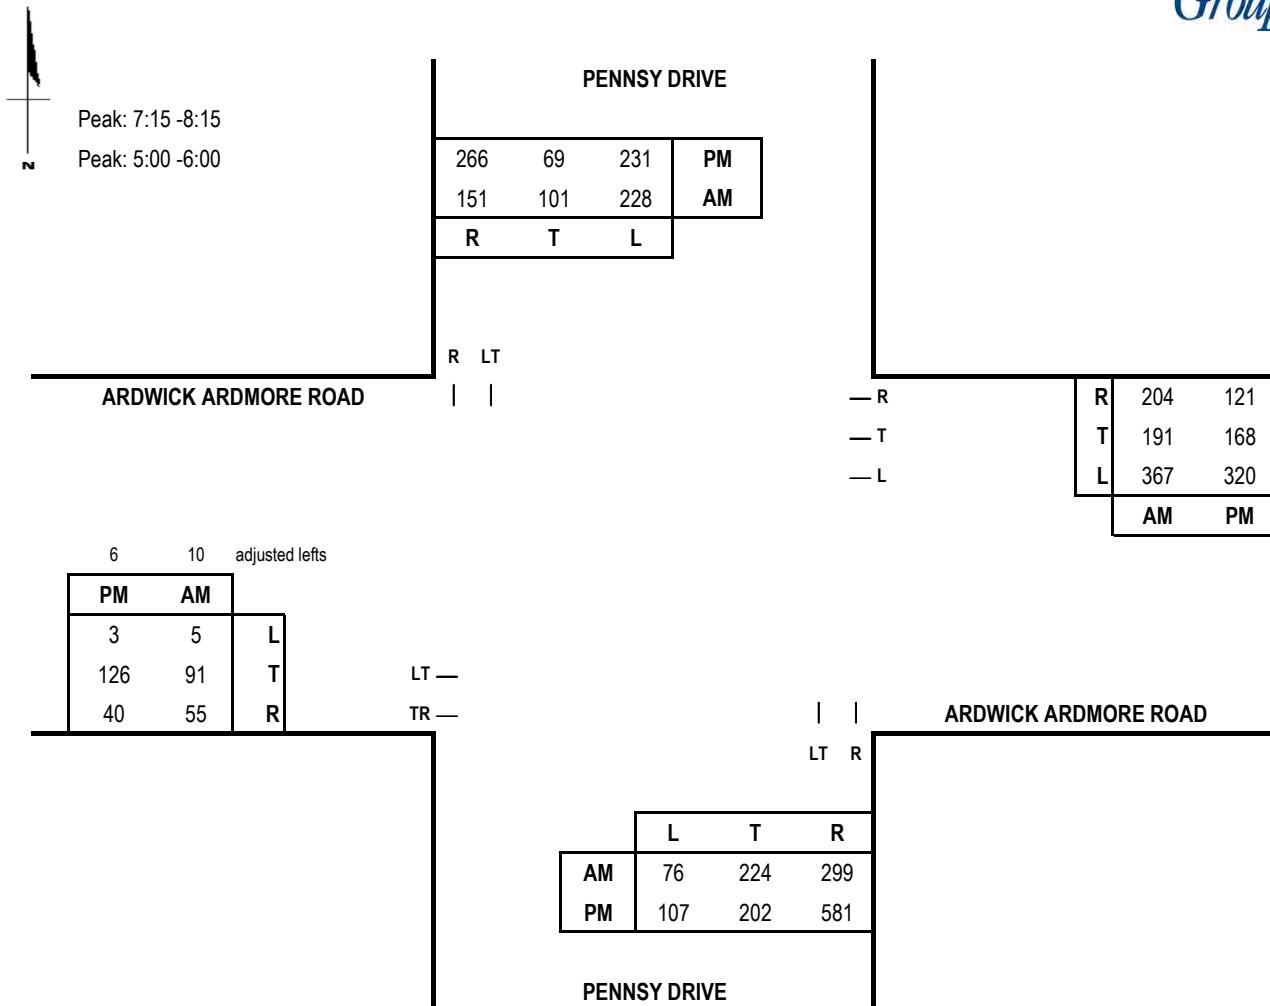

Capacity Analysis - North/South Split

Morning Peak Hour						
Dir	Thru Volumes			+ Opposing Lefts		AM CLV
	VOL	x LUF	= Total	VOL	x LUF	
NB	300	1.00	300			300
SB	329	1.00	329			329
EB	156	0.55	86	367	1.00	367
WB	191	1.00	191	5	1.00	5
CLV TOTAL =				1,082		
Level of Service (LOS) =				B		

Scenario ID - BACK7

AM V/C = 0.68

Evening Peak Hour						
Dir	Thru Volumes			+ Opposing Lefts		PM CLV
	VOL	x LUF	= Total	VOL	x LUF	
NB	309	1.00	309			309
SB	300	1.00	300			300
EB	172	0.55	95	320	1.00	320
WB	168	1.00	168	3	1.00	3
CLV TOTAL =				1,024		
Level of Service (LOS) =				B		
						PM V/C = 0.64

CRITICAL LANE VOLUME (CLV) METHODOLOGY

for Prince Georges County

E/W Road: Ardwick Ardmore Road


Date of Count: 5/19/2016

N/S Road: Pennsy Drive

Day of Count: Thursday

Conditions: Total Traffic

Analyst: Richard Huang

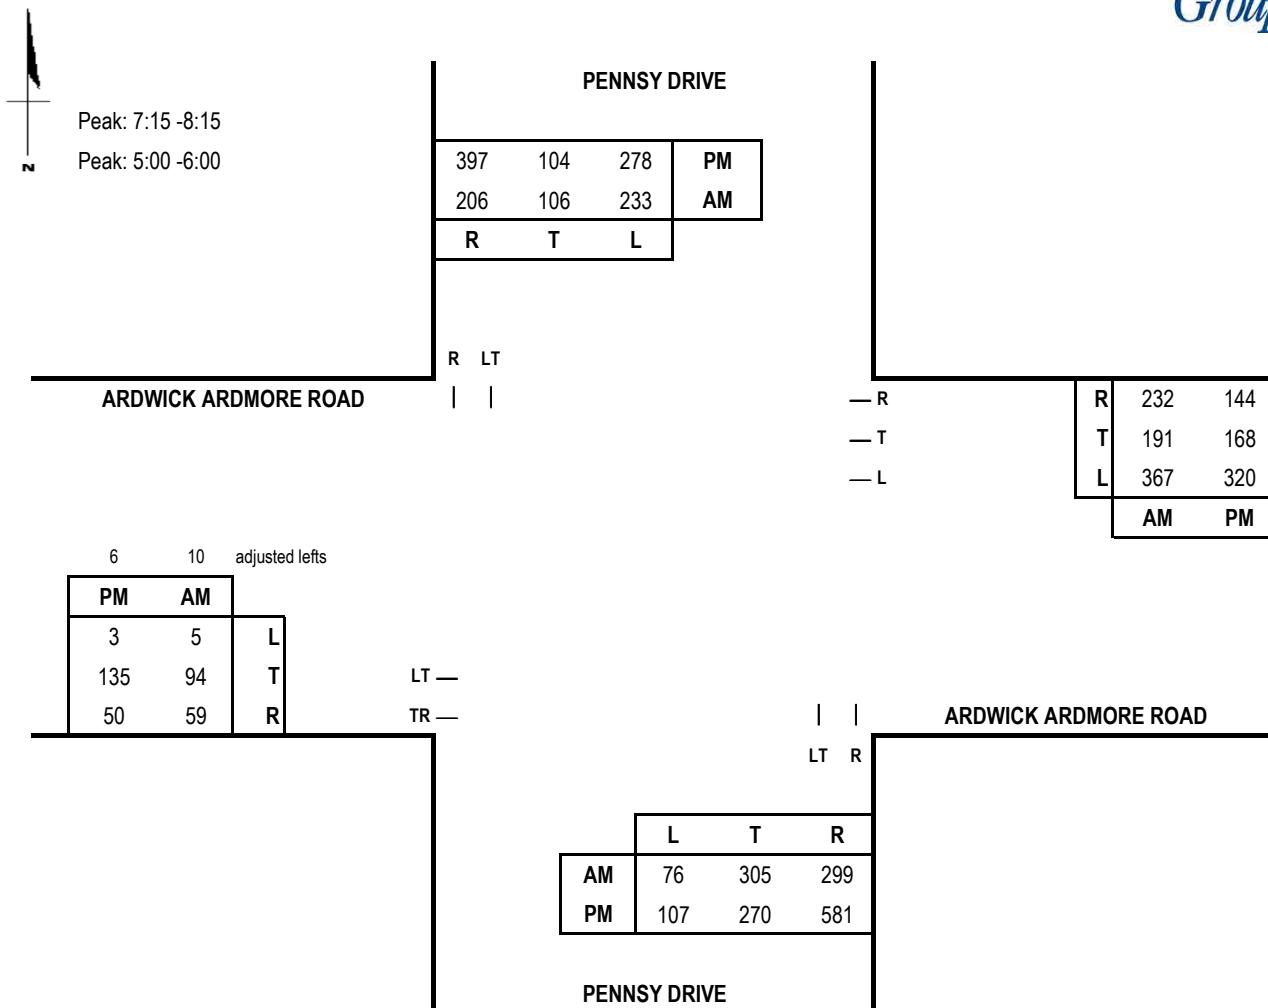

Capacity Analysis - North/South Split

Morning Peak Hour						
Dir	Thru Volumes			+ Opposing Lefts		AM CLV
	VOL	x LUF	= Total	VOL	x LUF	
NB	381	1.00	381			381
SB	339	1.00	339			339
EB	163	0.55	90	367	1.00	367
WB	191	1.00	191	5	1.00	5
CLV TOTAL =				1,177		
Level of Service (LOS) =				C		

Scenario ID - TOT7

AM V/C = 0.74

Evening Peak Hour						
Dir	Thru Volumes			+ Opposing Lefts		PM CLV
	VOL	x LUF	= Total	VOL	x LUF	
NB	377	1.00	377			377
SB	394	1.00	394			394
EB	191	0.55	105	320	1.00	320
WB	168	1.00	168	3	1.00	3
CLV TOTAL =				1,196		
Level of Service (LOS) =				C		
						PM V/C = 0.75

CRITICAL LANE VOLUME (CLV) METHODOLOGY

for Prince Georges County

E/W Road: Pennsy Drive


N/S Road: Corporate Drive

Conditions: Existing Traffic

Date of Count: 5/19/2016

Day of Count: Thursday

Analyst: Richard Huang

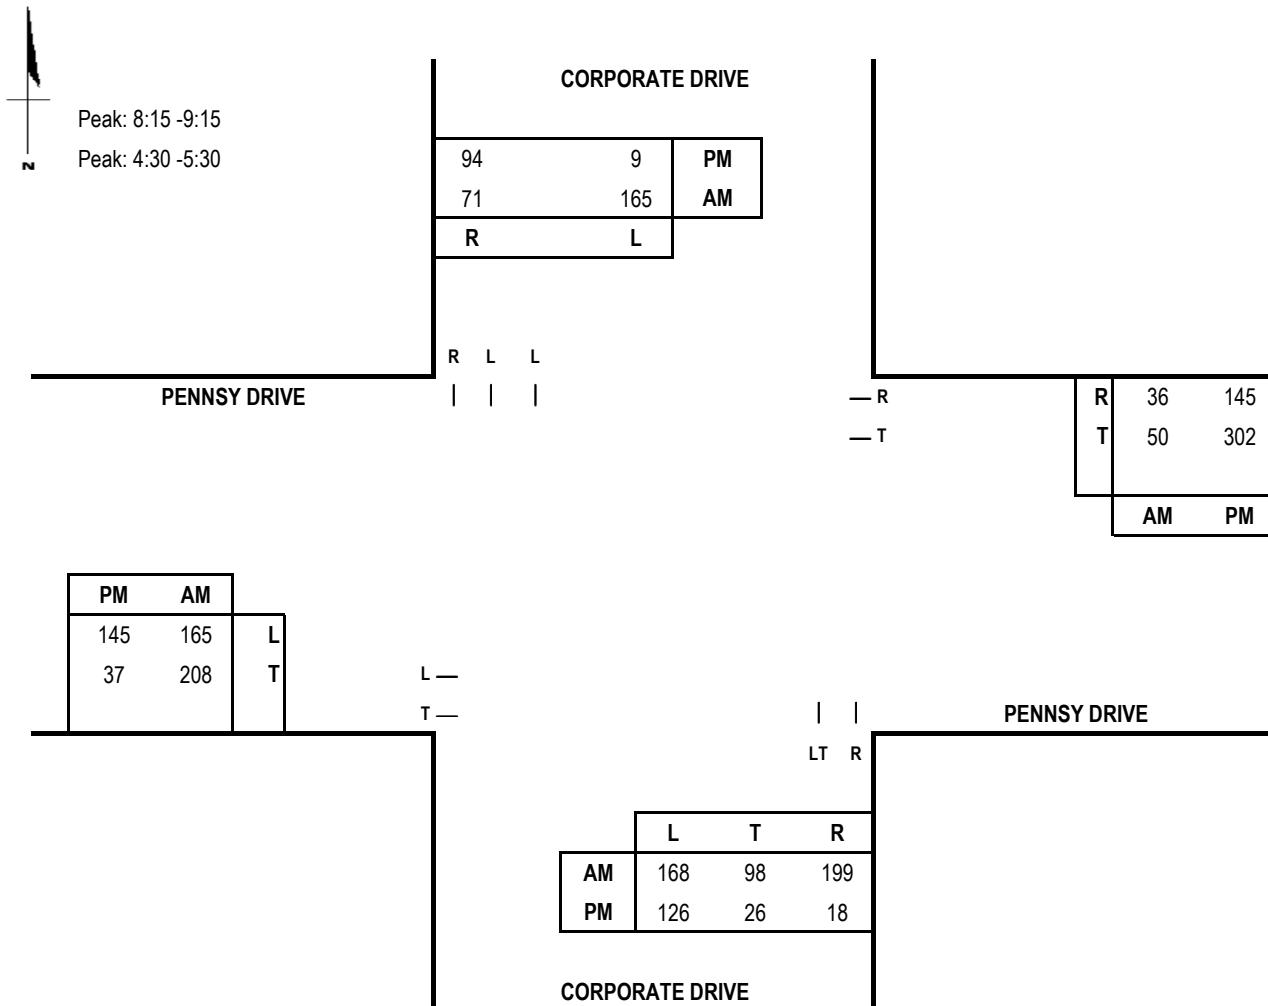

Capacity Analysis - North/South Split

Morning Peak Hour							
Dir	Thru Volumes			+ Opposing Lefts		AM CLV	
	VOL	x LUF	= Total	VOL	x LUF		
NB	266	1.00	266			266	
SB	165	0.60	99			99	
EB	208	1.00	208	0	0.00	0	215
WB	50	1.00	50	165	1.00	165	
CLV TOTAL =				580			
Level of Service (LOS) =				A			

Scenario ID - EXIST8

AM V/C = 0.36

Evening Peak Hour							
Dir	Thru Volumes			+ Opposing Lefts		PM CLV	
	VOL	x LUF	= Total	VOL	x LUF		
NB	152	1.00	152			152	
SB	9	0.60	5			5	
EB	37	1.00	37	0	0.00	0	447
WB	302	1.00	302	145	1.00	145	
CLV TOTAL =				604			
Level of Service (LOS) =				A			
						PM V/C = 0.38	

CRITICAL LANE VOLUME (CLV) METHODOLOGY

for Prince Georges County

E/W Road: Pennsy Drive


N/S Road: Corporate Drive

Conditions: Background Traffic

Date of Count: 5/19/2016

Day of Count: Thursday

Analyst: Richard Huang

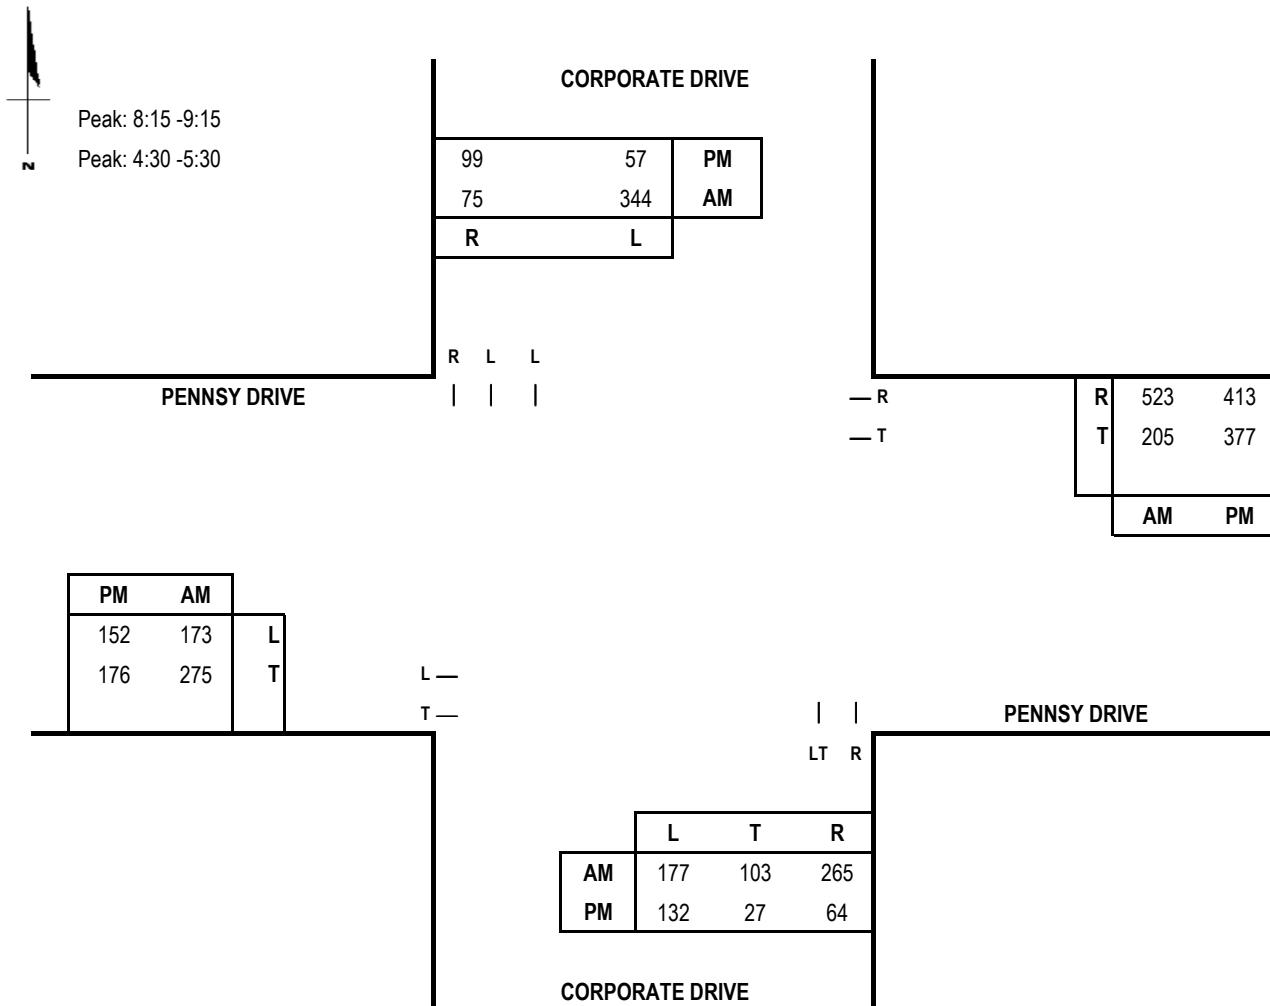

Capacity Analysis - North/South Split

Morning Peak Hour							
Dir	Thru Volumes			+ Opposing Lefts		AM CLV	
	VOL	x LUF	= Total	VOL	x LUF		
NB	280	1.00	280			280	
SB	344	0.60	206			206	
EB	275	1.00	275	0	0.00	0	490
WB	317	1.00	317	173	1.00	173	
CLV TOTAL =				976			
Level of Service (LOS) =				A			

Scenario ID - BACK8

AM V/C = 0.61

Evening Peak Hour							
Dir	Thru Volumes			+ Opposing Lefts		PM CLV	
	VOL	x LUF	= Total	VOL	x LUF		
NB	159	1.00	159			159	
SB	57	0.60	34			34	
EB	176	1.00	176	0	0.00	0	531
WB	379	1.00	379	152	1.00	152	
CLV TOTAL =				724			
Level of Service (LOS) =				A			
						PM V/C = 0.45	

CRITICAL LANE VOLUME (CLV) METHODOLOGY

for Prince Georges County

E/W Road: Pennsy Drive


N/S Road: Corporate Drive

Conditions: Total Traffic

Date of Count: 5/19/2016

Day of Count: Thursday

Analyst: Richard Huang

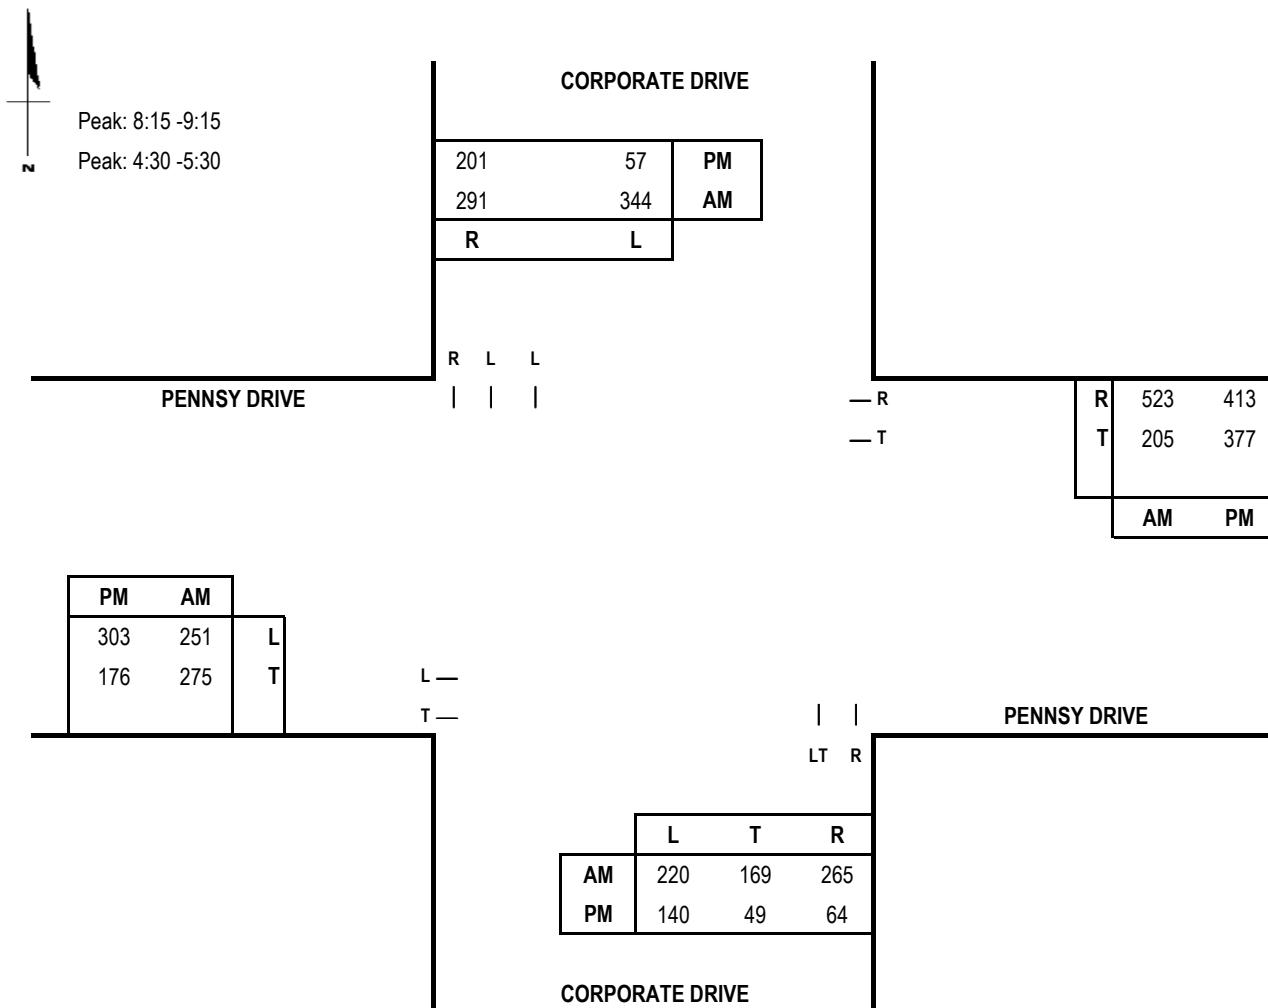

Capacity Analysis - North/South Split

Morning Peak Hour							
Dir	Thru Volumes		+ Opposing Lefts		AM CLV		
	VOL	x LUF	= Total	VOL	x LUF	= Total	
NB	389	1.00	389			389	
SB	344	0.60	206			206	
EB	275	1.00	275	0	0.00	0	568
WB	317	1.00	317	251	1.00	251	
CLV TOTAL =				1,163			
Level of Service (LOS) =				C			

Scenario ID - TOT8

AM V/C =0.73

Evening Peak Hour							
Dir	Thru Volumes		+ Opposing Lefts		PM CLV		
	VOL	x LUF	= Total	VOL	x LUF	= Total	
NB	189	1.00	189			189	
SB	57	0.60	34			34	
EB	176	1.00	176	0	0.00	0	682
WB	379	1.00	379	303	1.00	303	
CLV TOTAL =				905			
Level of Service (LOS) =				A			
PM V/C =0.57							

CRITICAL LANE VOLUME (CLV) METHODOLOGY

for Prince Georges County

E/W Road: Annapolis Road


N/S Road: 85Th Avenue

Conditions: Existing Traffic

Date of Count: 5/19/2016

Day of Count: Thursday

Analyst: Richard Huang

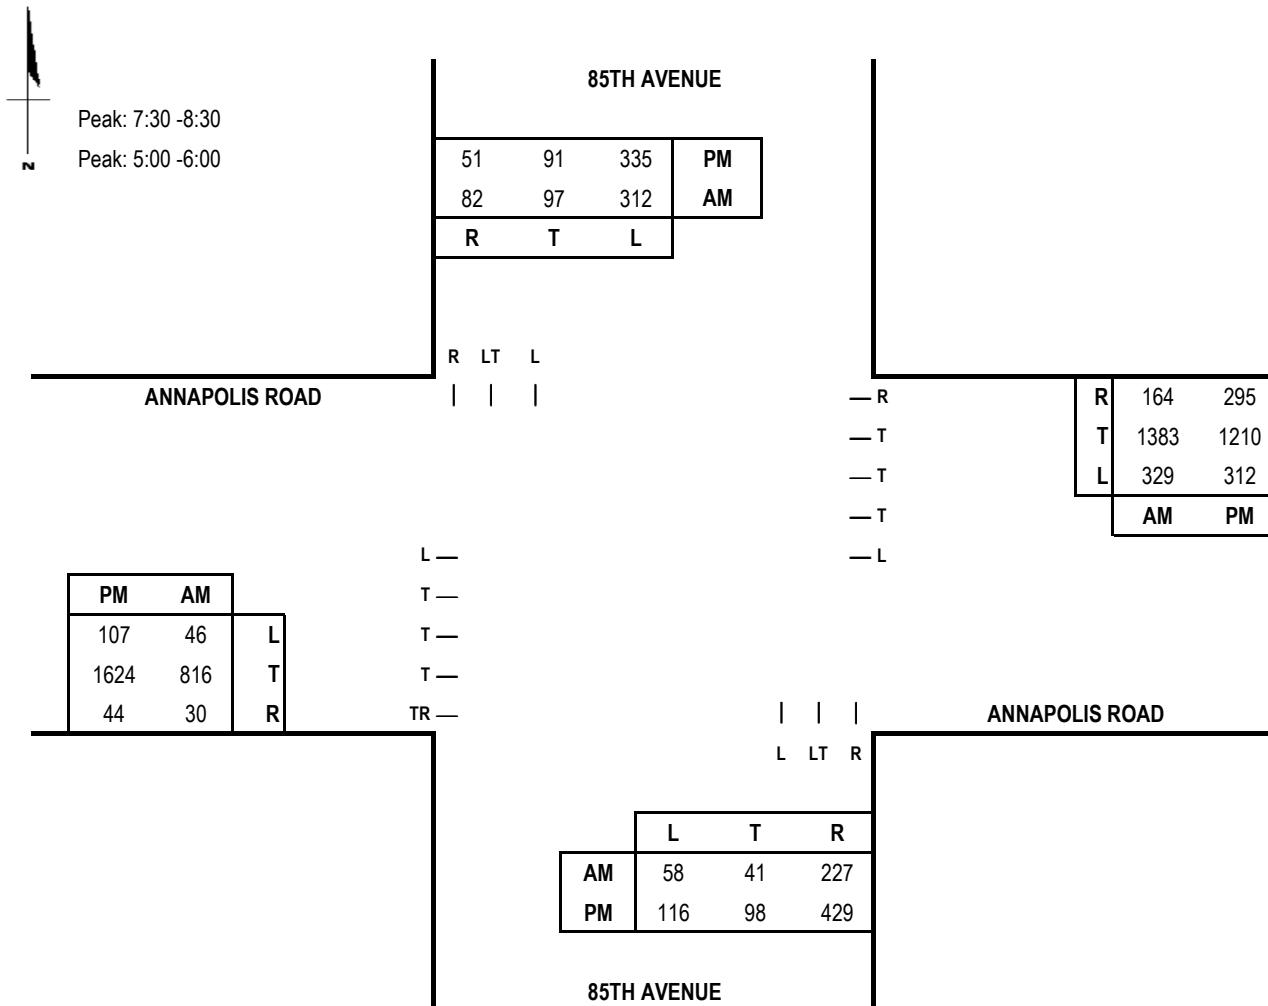

Capacity Analysis - North/South Split

Morning Peak Hour						
Dir	Thru Volumes			+ Opposing Lefts		AM CLV
	VOL	x LUF	= Total	VOL	x LUF	
NB	99	0.60	59			59
SB	409	0.60	245			245
EB	846	0.29	245	329	1.00	329
WB	1383	0.37	512	46	1.00	46
CLV TOTAL =				878		
Level of Service (LOS) =				A		

Scenario ID - EXIST10

AM V/C = 0.55

Evening Peak Hour						
Dir	Thru Volumes			+ Opposing Lefts		PM CLV
	VOL	x LUF	= Total	VOL	x LUF	
NB	214	0.60	128			128
SB	426	0.60	256			256
EB	1668	0.29	484	312	1.00	312
WB	1210	0.37	448	107	1.00	107
CLV TOTAL =				1,180		
Level of Service (LOS) =				C		
						PM V/C = 0.74

CRITICAL LANE VOLUME (CLV) METHODOLOGY

for Prince Georges County

E/W Road: Annapolis Road


Date of Count: 5/19/2016

N/S Road: 85Th Avenue

Day of Count: Thursday

Conditions: Background Traffic

Analyst: Richard Huang

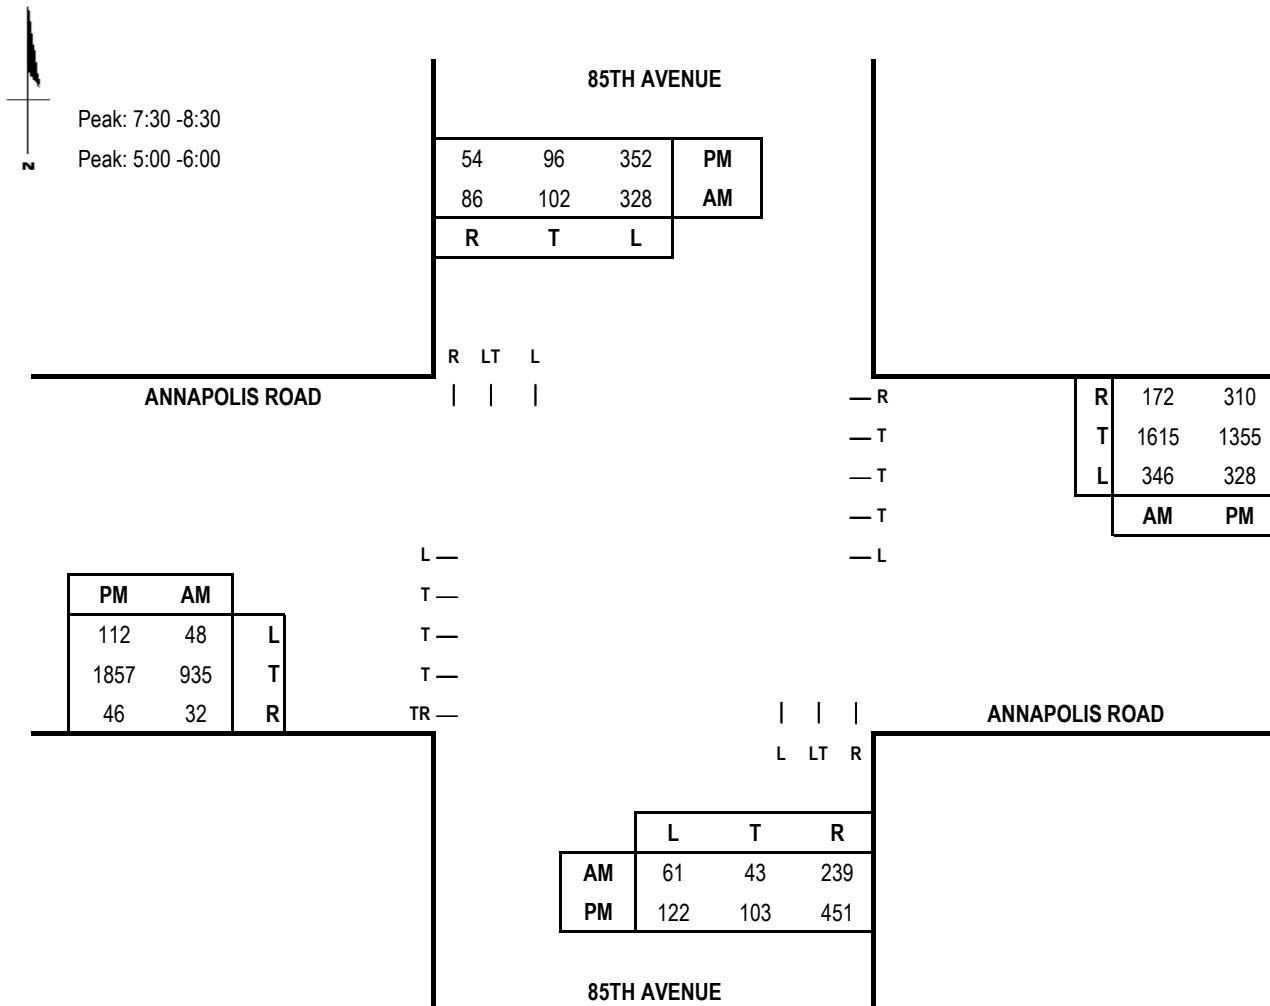

Capacity Analysis - North/South Split

Morning Peak Hour						
Dir	Thru Volumes			+ Opposing Lefts		AM CLV
	VOL	x LUF	= Total	VOL	x LUF	
NB	104	0.60	62			62
SB	430	0.60	258			258
EB	967	0.29	280	346	1.00	346
WB	1615	0.37	598	48	1.00	48
CLV TOTAL =				966		
Level of Service (LOS) =				A		

Scenario ID - BACK10

AM V/C = 0.6

Evening Peak Hour						
Dir	Thru Volumes			+ Opposing Lefts		PM CLV
	VOL	x LUF	= Total	VOL	x LUF	
NB	225	0.60	135			135
SB	448	0.60	269			269
EB	1903	0.29	552	328	1.00	328
WB	1355	0.37	501	112	1.00	112
CLV TOTAL =				1,284		
Level of Service (LOS) =				C		
						PM V/C = 0.8

CRITICAL LANE VOLUME (CLV) METHODOLOGY

for Prince Georges County

E/W Road: Annapolis Road


N/S Road: 85Th Avenue

Conditions: Total Traffic

Date of Count: 5/19/2016

Day of Count: Thursday

Analyst: Richard Huang

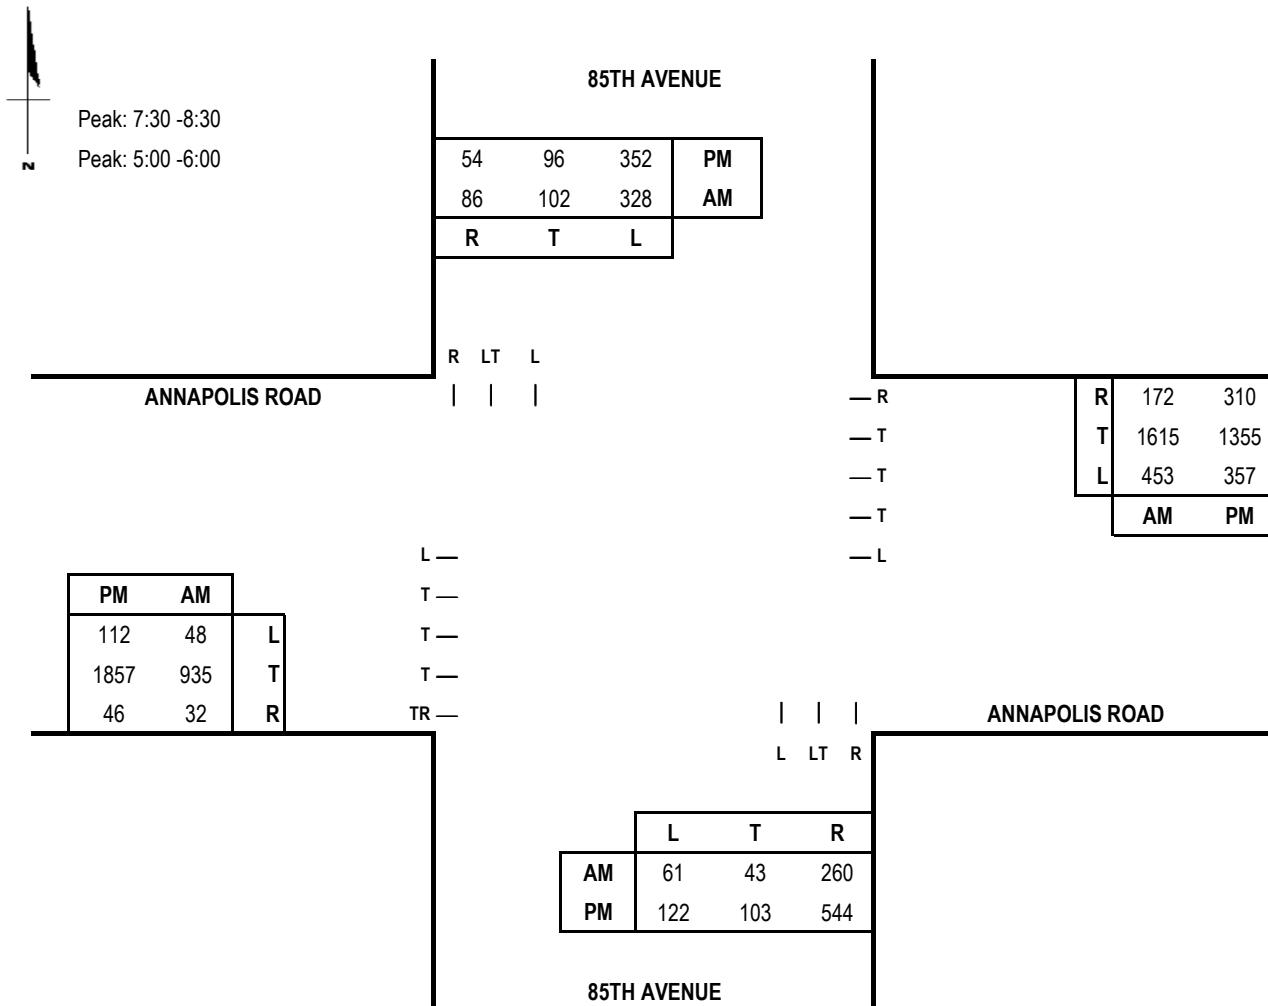

Capacity Analysis - North/South Split

Morning Peak Hour						
Dir	Thru Volumes			+ Opposing Lefts		AM CLV
	VOL	x LUF	= Total	VOL	x LUF	
NB	104	0.60	62			62
SB	430	0.60	258			258
EB	967	0.29	280	453	1.00	453
WB	1615	0.37	598	48	1.00	48
				CLV TOTAL =	1,053	
Level of Service (LOS) =				B		

Scenario ID - TOT10

AM V/C = 0.66

Evening Peak Hour						
Dir	Thru Volumes			+ Opposing Lefts		PM CLV
	VOL	x LUF	= Total	VOL	x LUF	
NB	187	1.00	187			187
SB	448	0.60	269			269
EB	1903	0.29	552	357	1.00	357
WB	1355	0.37	501	112	1.00	112
				CLV TOTAL =	1,365	
Level of Service (LOS) =				D		
						PM V/C = 0.85

CRITICAL LANE VOLUME (CLV) METHODOLOGY

for Prince Georges County

E/W Road: Annapolis Road


Date of Count: 5/19/2016

N/S Road: Finns Lane/Harkins Road

Day of Count: Thursday

Conditions: Existing Traffic

Analyst: Richard Huang

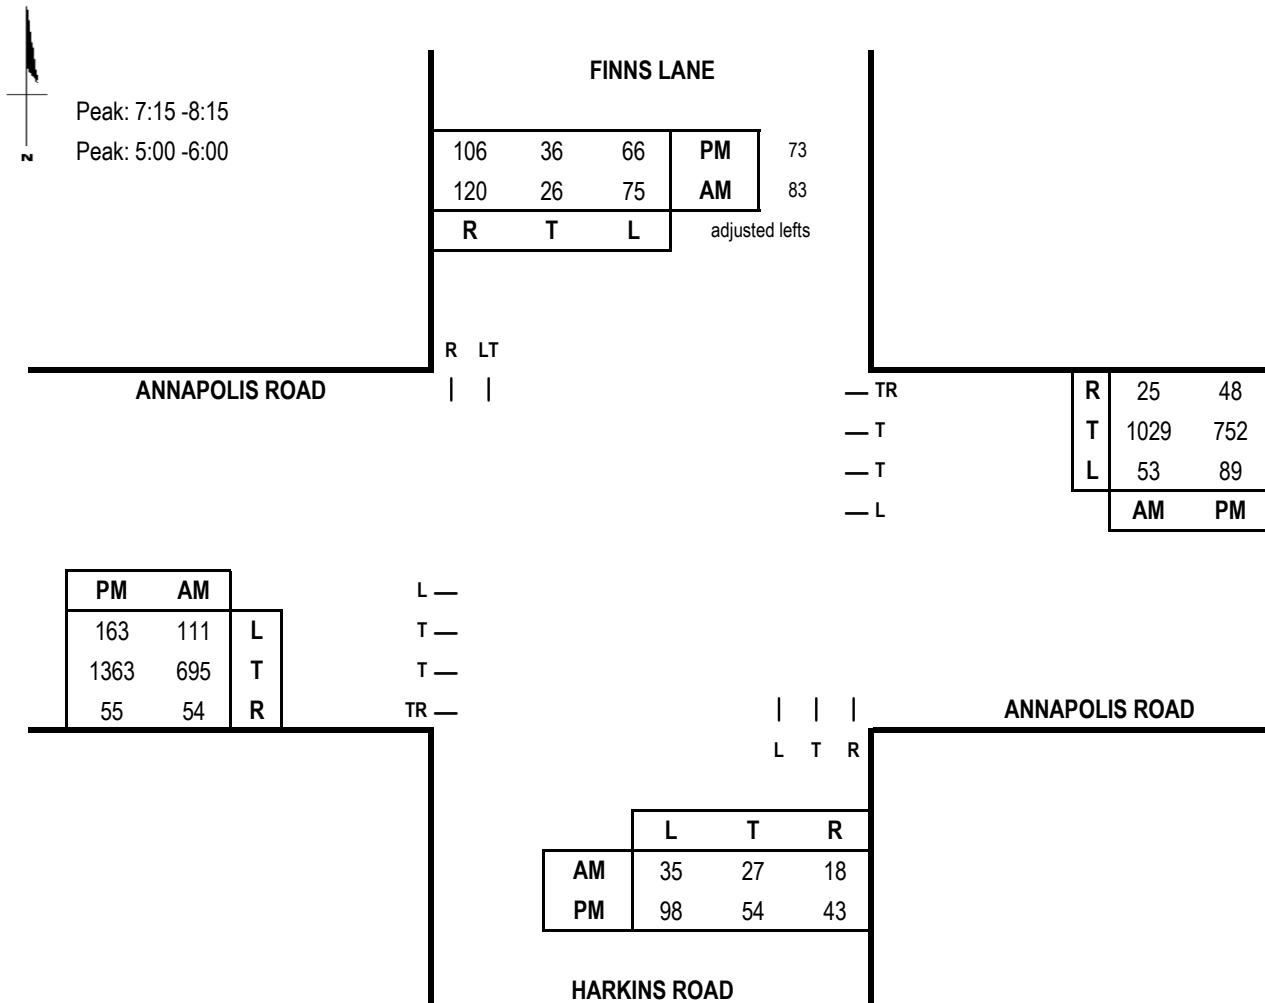

Capacity Analysis

Morning Peak Hour						
Dir	Thru Volumes			+ Opposing Lefts		AM CLV
	VOL	x LUF	= Total	VOL	x LUF	
NB	27	1.00	27	75	1.00	75
SB	109	1.00	109	35	1.00	35
EB	749	0.37	277	53	1.00	53
WB	1054	0.37	390	111	1.00	111
CLV TOTAL =				645		
Level of Service (LOS) =				A		

Scenario ID - EXIST11

AM V/C = 0.4

Evening Peak Hour						
Dir	Thru Volumes			+ Opposing Lefts		PM CLV
	VOL	x LUF	= Total	VOL	x LUF	
NB	54	1.00	54	66	1.00	66
SB	109	1.00	109	98	1.00	98
EB	1418	0.37	525	89	1.00	89
WB	800	0.37	296	163	1.00	163
CLV TOTAL =				821		
Level of Service (LOS) =				A		

PM V/C = 0.51

CRITICAL LANE VOLUME (CLV) METHODOLOGY

for Prince Georges County

E/W Road: Annapolis Road


Date of Count: 5/19/2016

N/S Road: Finns Lane/Harkins Road

Day of Count: Thursday

Conditions: Background Traffic

Analyst: Richard Huang

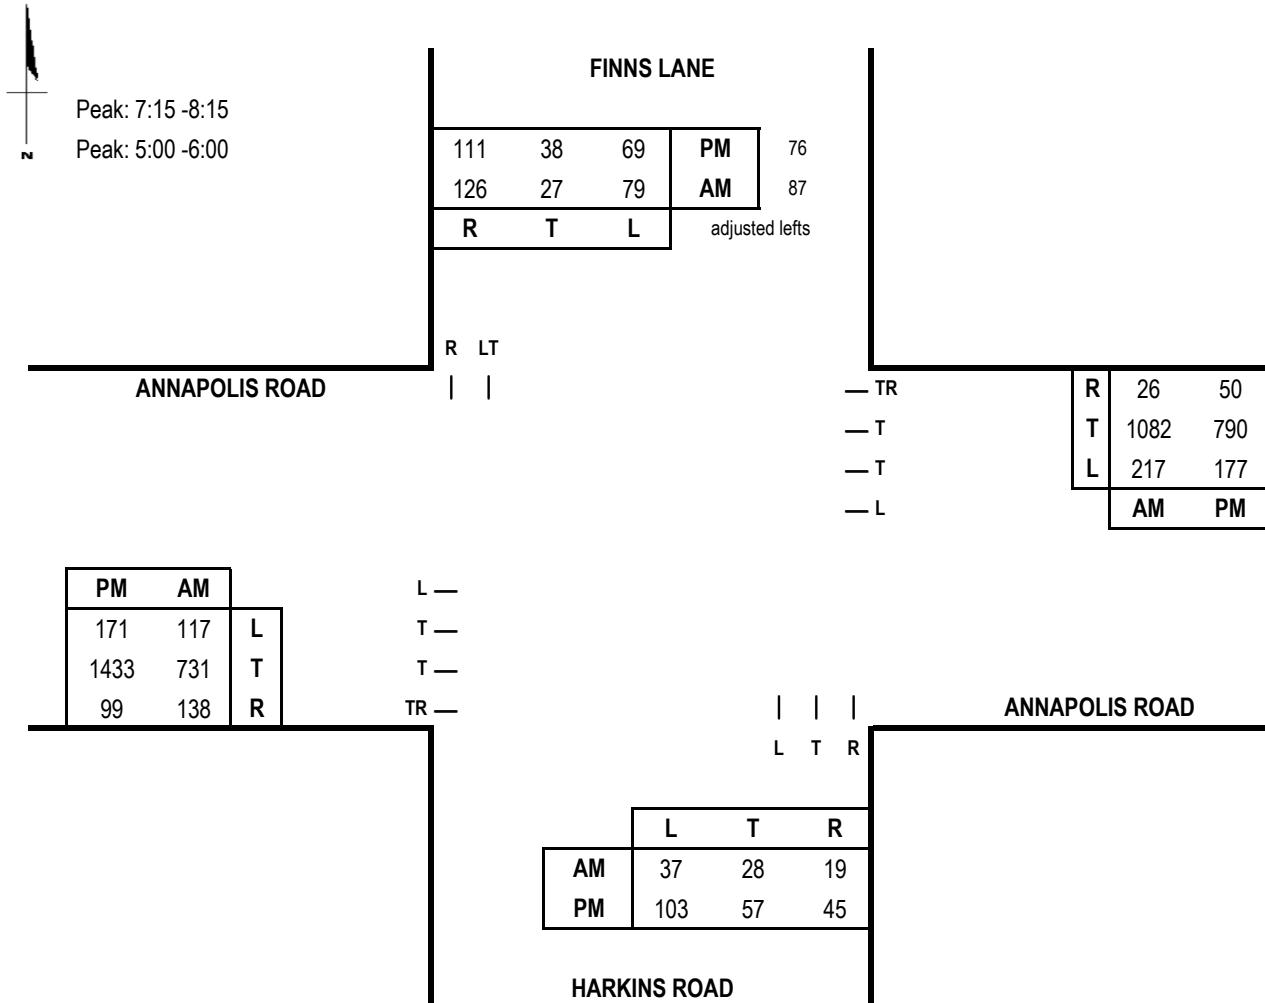

Capacity Analysis

Morning Peak Hour							
Dir	Thru Volumes			+ Opposing Lefts		AM CLV	
	VOL	x LUF	= Total	VOL	x LUF		
NB	28	1.00	28	79	1.00	79	151
SB	114	1.00	114	37	1.00	37	
EB	869	0.37	322	217	1.00	217	539
WB	1108	0.37	410	117	1.00	117	
CLV TOTAL =				690			
Level of Service (LOS) =				A			

Scenario ID - BACK11

AM V/C = 0.43

Evening Peak Hour							
Dir	Thru Volumes			+ Opposing Lefts		PM CLV	
	VOL	x LUF	= Total	VOL	x LUF		
NB	57	1.00	57	69	1.00	69	217
SB	114	1.00	114	103	1.00	103	
EB	1532	0.37	567	177	1.00	177	744
WB	840	0.37	311	171	1.00	171	
CLV TOTAL =				961			
Level of Service (LOS) =				A			

PM V/C = 0.6

CRITICAL LANE VOLUME (CLV) METHODOLOGY

for Prince Georges County

E/W Road: Annapolis Road


Date of Count: 5/19/2016

N/S Road: Finns Lane/Harkins Road

Day of Count: Thursday

Conditions: Total Traffic

Analyst: Richard Huang

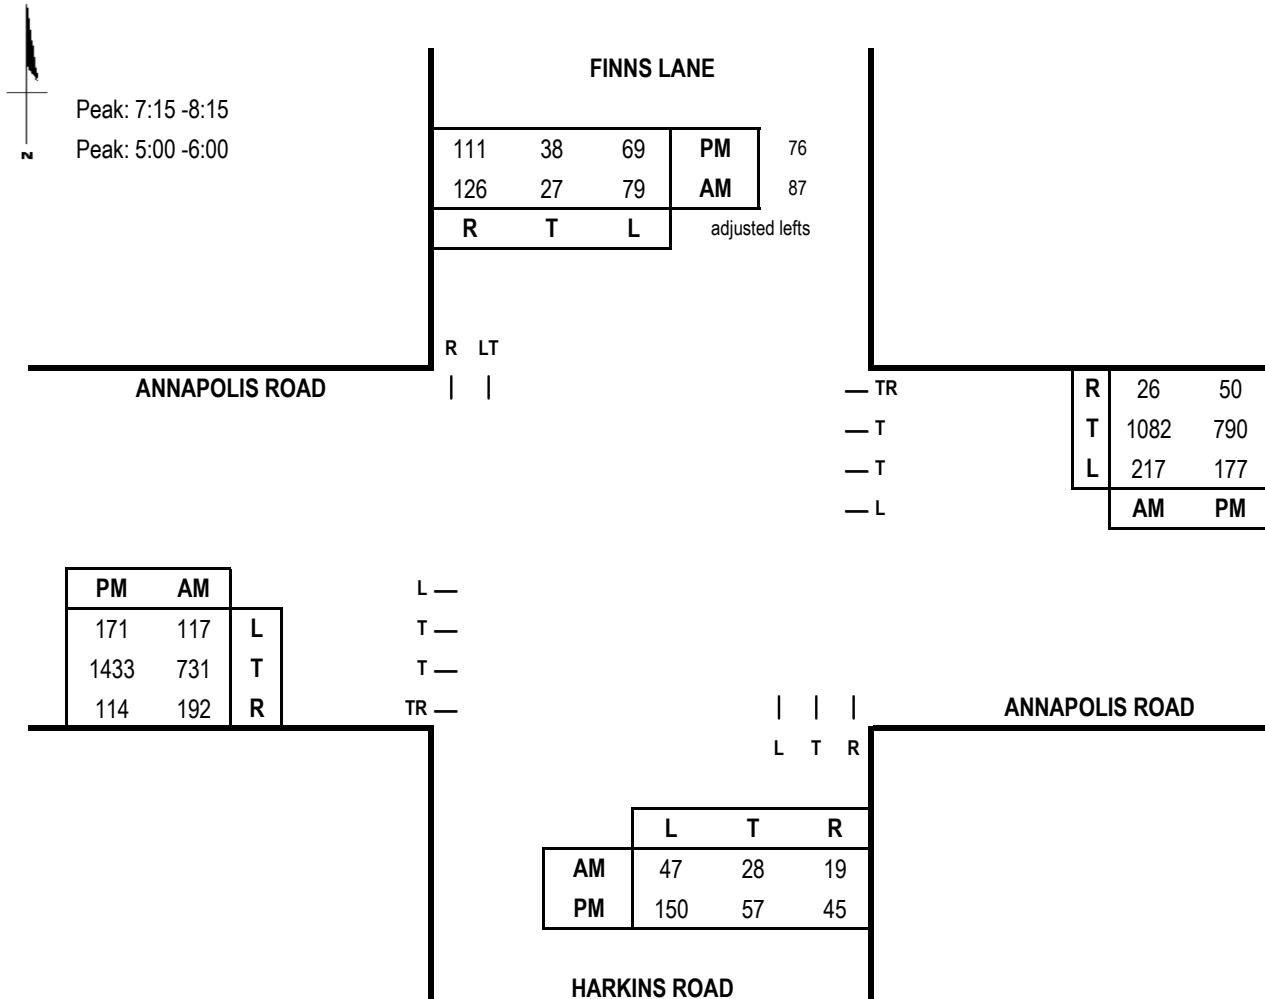

Capacity Analysis

Morning Peak Hour							
Dir	Thru Volumes			+ Opposing Lefts		AM CLV	
	VOL	x LUF	= Total	VOL	x LUF		
NB	28	1.00	28	79	1.00	79	161
SB	114	1.00	114	47	1.00	47	
EB	923	0.37	342	217	1.00	217	559
WB	1108	0.37	410	117	1.00	117	
CLV TOTAL =				720			
Level of Service (LOS) =				A			

Scenario ID - TOT11

AM V/C = 0.45

Evening Peak Hour							
Dir	Thru Volumes			+ Opposing Lefts		PM CLV	
	VOL	x LUF	= Total	VOL	x LUF		
NB	57	1.00	57	69	1.00	69	264
SB	114	1.00	114	150	1.00	150	
EB	1547	0.37	572	177	1.00	177	749
WB	840	0.37	311	171	1.00	171	
CLV TOTAL =				1,013			
Level of Service (LOS) =				B			

PM V/C = 0.63

CRITICAL LANE VOLUME (CLV) METHODOLOGY

for Prince Georges County

E/W Road: Ellin Road

Date of Count: 5/19/2016




N/S Road: Harkins Road/Parking Access

Day of Count: Thursday

Conditions: Existing Traffic

Analyst: Richard Huang

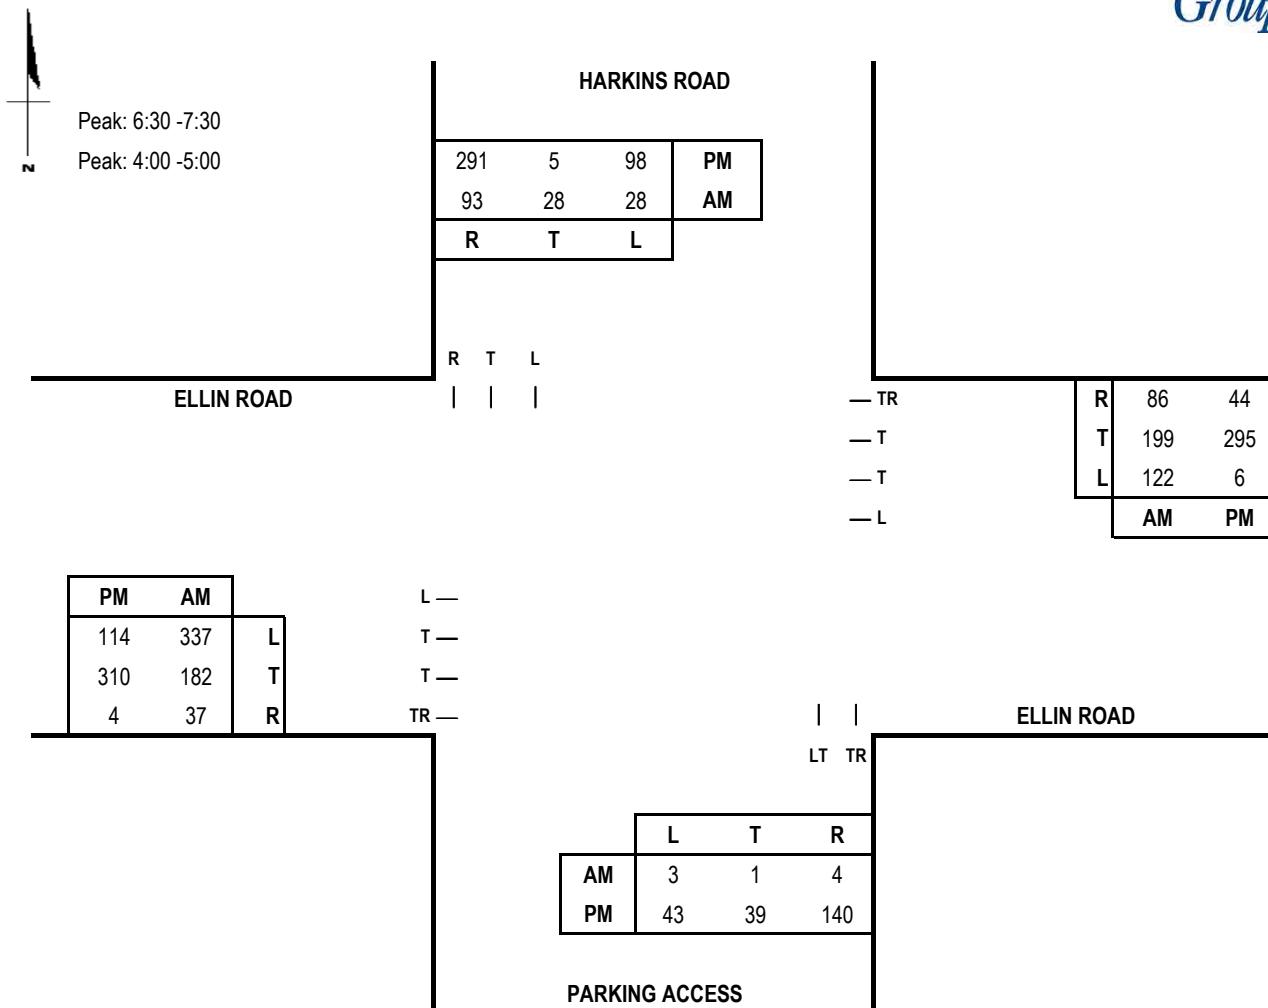

Capacity Analysis - North/South Split

Morning Peak Hour						
Dir	Thru Volumes			+ Opposing Lefts		AM CLV
	VOL	x LUF	= Total	VOL	x LUF	
NB	8	0.55	4			4
SB	28	1.00	28			28
EB	219	0.37	81	122	1.00	122
WB	285	0.37	105	337	1.00	337
CLV TOTAL =				474		
Level of Service (LOS) =				A		

Scenario ID - EXIST12

AM V/C = 0.3

Evening Peak Hour						
Dir	Thru Volumes			+ Opposing Lefts		PM CLV
	VOL	x LUF	= Total	VOL	x LUF	
NB	140	1.00	140			140
SB	177	1.00	177			177
EB	314	0.37	116	6	1.00	6
WB	339	0.37	125	114	1.00	114
CLV TOTAL =				556		
Level of Service (LOS) =				A		
PM V/C = 0.35						

CRITICAL LANE VOLUME (CLV) METHODOLOGY

for Prince Georges County

E/W Road: Ellin Road

Date of Count: 5/19/2016




N/S Road: Harkins Road/Parking Access

Day of Count: Thursday

Conditions: Background Traffic

Analyst: Richard Huang

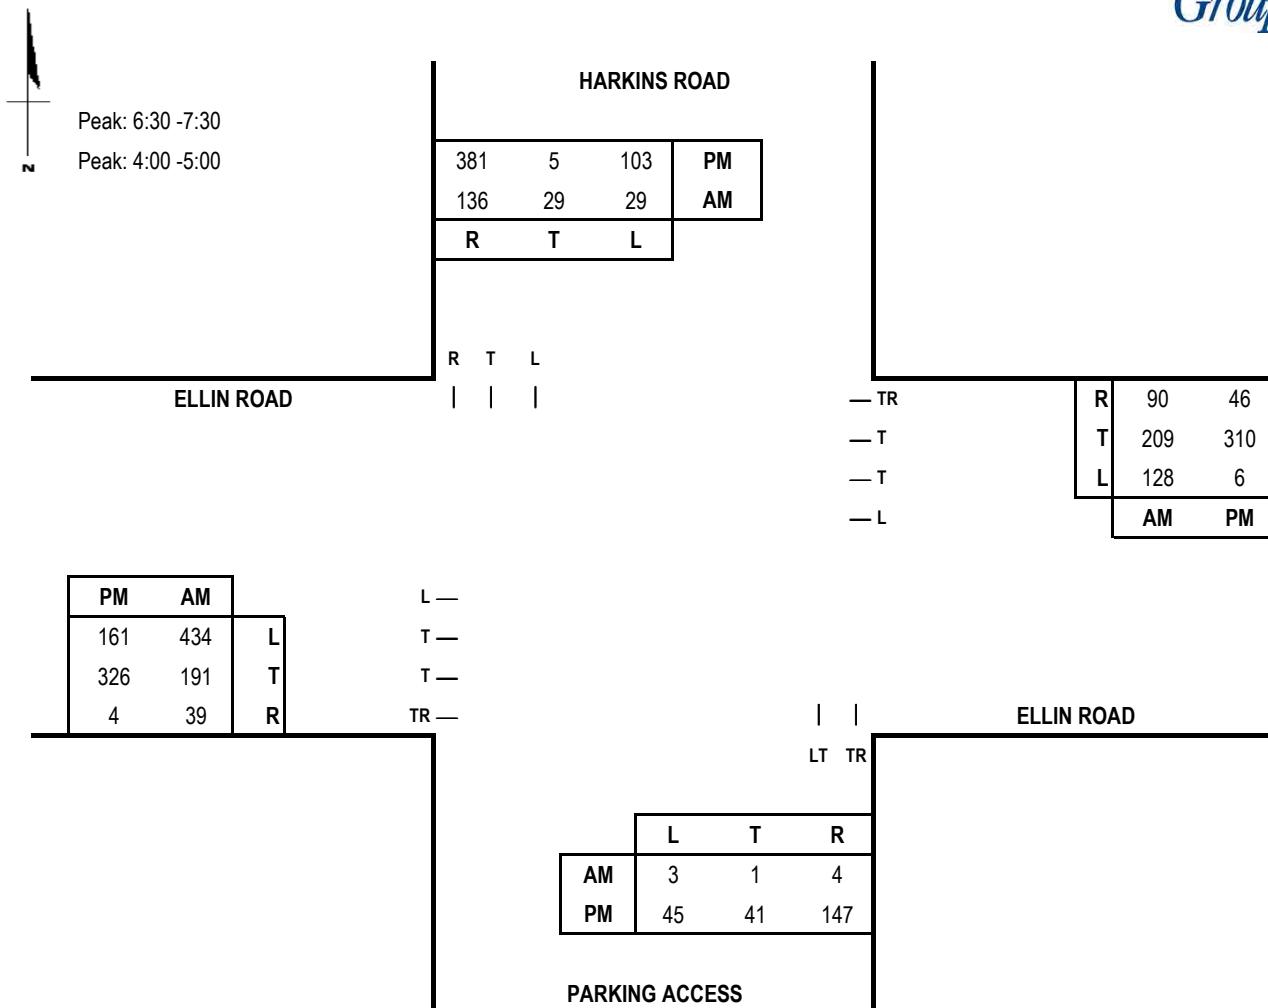

Capacity Analysis - North/South Split

Morning Peak Hour						
Dir	Thru Volumes			+ Opposing Lefts		AM CLV
	VOL	x LUF	= Total	VOL	x LUF	
NB	8	0.55	4			4
SB	29	1.00	29			29
EB	230	0.37	85	128	1.00	128
WB	299	0.37	111	434	1.00	434
CLV TOTAL =				578		
Level of Service (LOS) =				A		

Scenario ID - BACK12

AM V/C = 0.36

Evening Peak Hour						
Dir	Thru Volumes			+ Opposing Lefts		PM CLV
	VOL	x LUF	= Total	VOL	x LUF	
NB	147	1.00	147			147
SB	220	1.00	220			220
EB	330	0.37	122	6	1.00	6
WB	356	0.37	132	161	1.00	161
CLV TOTAL =				660		
Level of Service (LOS) =				A		
						PM V/C = 0.41

CRITICAL LANE VOLUME (CLV) METHODOLOGY

for Prince Georges County

E/W Road: Ellin Road


Date of Count: 5/19/2016

N/S Road: Harkins Road/Parking Access

Day of Count: Thursday

Conditions: Total Traffic

Analyst: Richard Huang

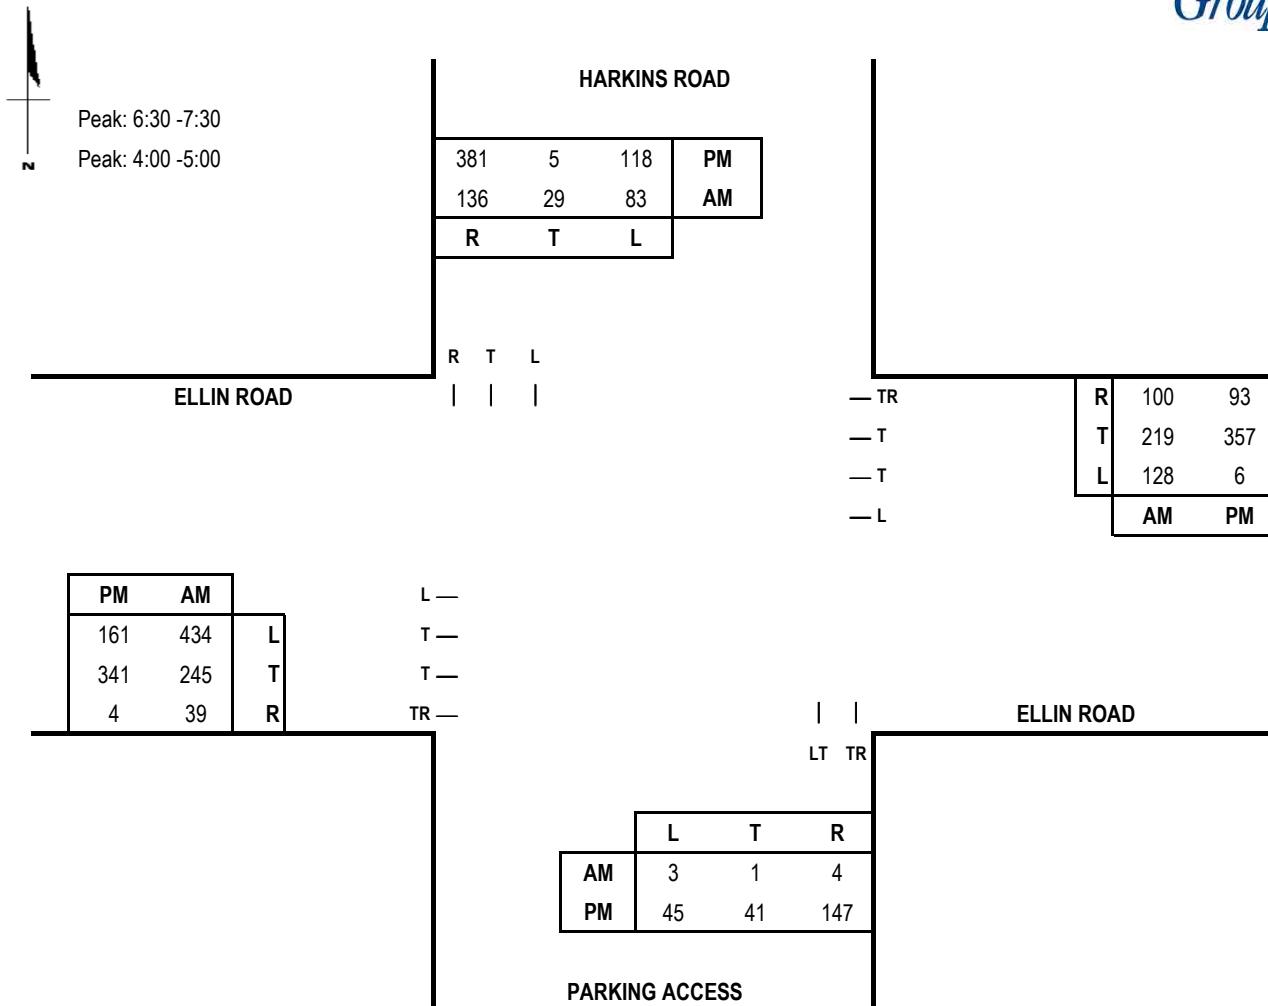

Capacity Analysis - North/South Split

Morning Peak Hour						
Dir	Thru Volumes			+ Opposing Lefts		AM CLV
	VOL	x LUF	= Total	VOL	x LUF	
NB	8	0.55	4			4
SB	83	1.00	83			83
EB	284	0.37	105	128	1.00	128
WB	319	0.37	118	434	1.00	434
CLV TOTAL =				639		
Level of Service (LOS) =				A		

Scenario ID - TOT12

AM V/C = 0.4

Evening Peak Hour						
Dir	Thru Volumes			+ Opposing Lefts		PM CLV
	VOL	x LUF	= Total	VOL	x LUF	
NB	147	1.00	147			147
SB	220	1.00	220			220
EB	345	0.37	128	6	1.00	6
WB	450	0.37	167	161	1.00	161
CLV TOTAL =				695		
Level of Service (LOS) =				A		
						PM V/C = 0.43

CRITICAL LANE VOLUME (CLV) METHODOLOGY

for Prince Georges County

E/W Road: Ellin Road


N/S Road: MD 410

Conditions: Existing Traffic

Date of Count: 5/19/2016

Day of Count: Thursday

Analyst: Richard Huang

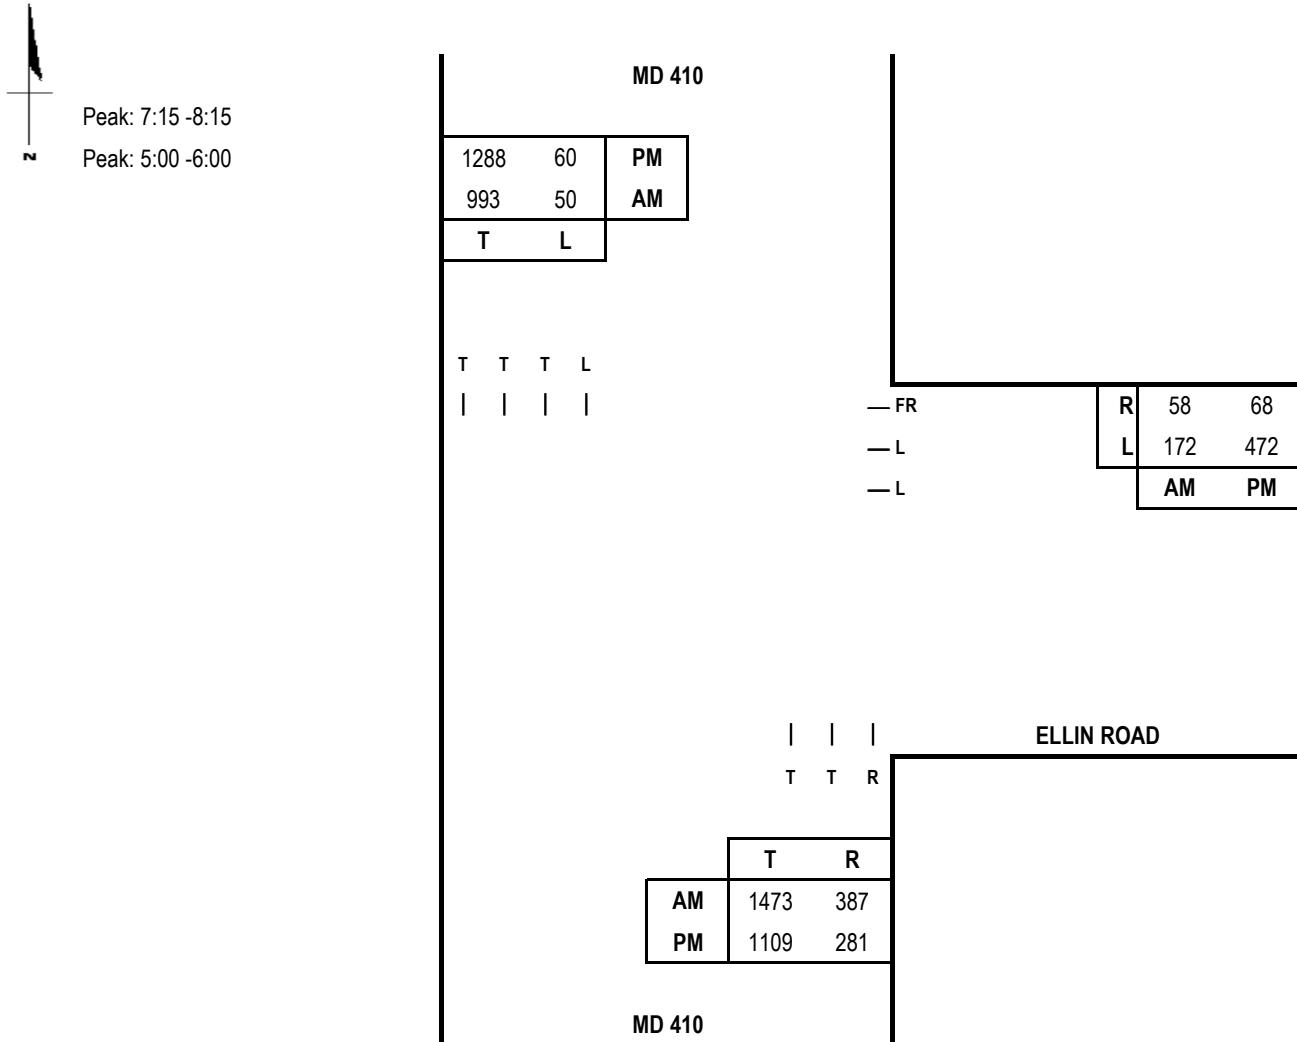

Capacity Analysis

Morning Peak Hour							
Dir	Thru Volumes		+ Opposing Lefts		AM CLV		
	VOL	x LUF	= Total	VOL	x LUF	= Total	
WB	172	0.60	103			103	
NB	1473	0.55	810	50	1.00	50	860
SB	993	0.37	367				
CLV TOTAL=			963				
Level of Service (LOS) =				A			

Scenario ID - EXIST13

CLV V/C = 0.6

Evening Peak Hour							
Dir	Thru Volumes		+ Opposing Lefts		PM CLV		
	VOL	x LUF	= Total	VOL	x LUF	= Total	
WB	472	0.60	283			283	
NB	1109	0.55	610	60	1.00	60	670
SB	1288	0.37	477				
CLV TOTAL=			953				
Level of Service (LOS) =				A			
CLV V/C = 0.6							

CRITICAL LANE VOLUME (CLV) METHODOLOGY

for Prince Georges County

E/W Road: Ellin Road


N/S Road: MD 410

Conditions: Background Traffic

Date of Count: 5/19/2016

Day of Count: Thursday

Analyst: Richard Huang

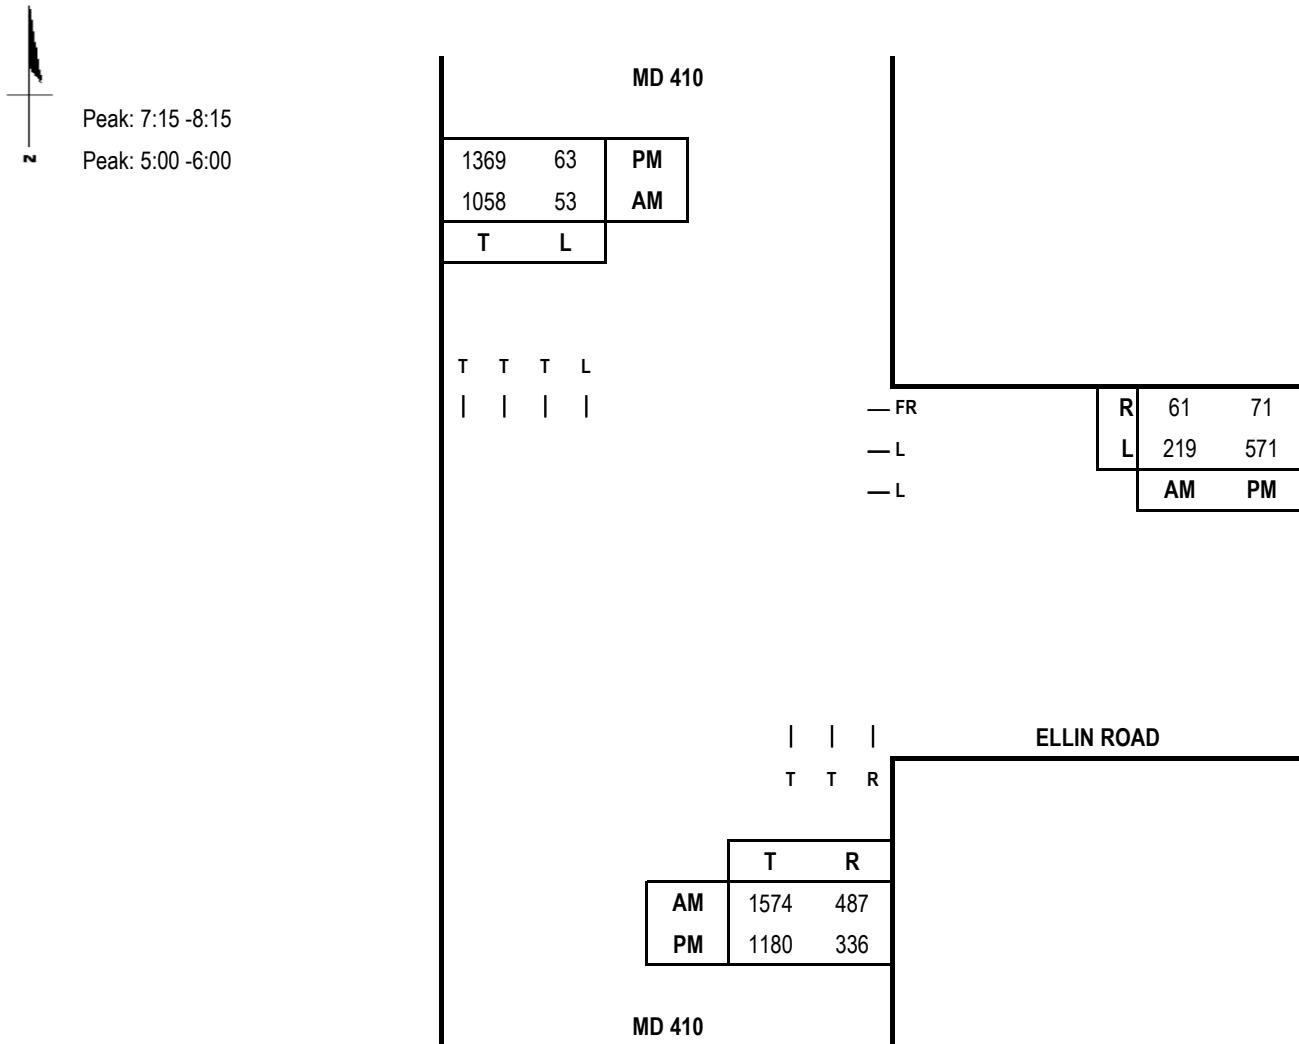

Capacity Analysis

Morning Peak Hour							
Dir	Thru Volumes		+ Opposing Lefts		AM CLV		
	VOL	x LUF	= Total	VOL	x LUF = Total		
WB	219	0.60	131			131	
NB	1574	0.55	866	53	1.00	53	919
SB	1058	0.37	391				

CLV TOTAL= 1,050

Level of Service (LOS)= B

Scenario ID - BACK13

CLV V/C = 0.66

Evening Peak Hour							
Dir	Thru Volumes		+ Opposing Lefts		PM CLV		
	VOL	x LUF	= Total	VOL	x LUF = Total		
WB	571	0.60	343			343	
NB	1180	0.55	649	63	1.00	63	712
SB	1369	0.37	507				

CLV TOTAL= 1,055

Level of Service (LOS)= B

CLV V/C = 0.66

CRITICAL LANE VOLUME (CLV) METHODOLOGY

for Prince Georges County

E/W Road: Ellin Road


N/S Road: MD 410

Conditions: Total Traffic

Date of Count: 5/19/2016

Day of Count: Thursday

Analyst: Richard Huang

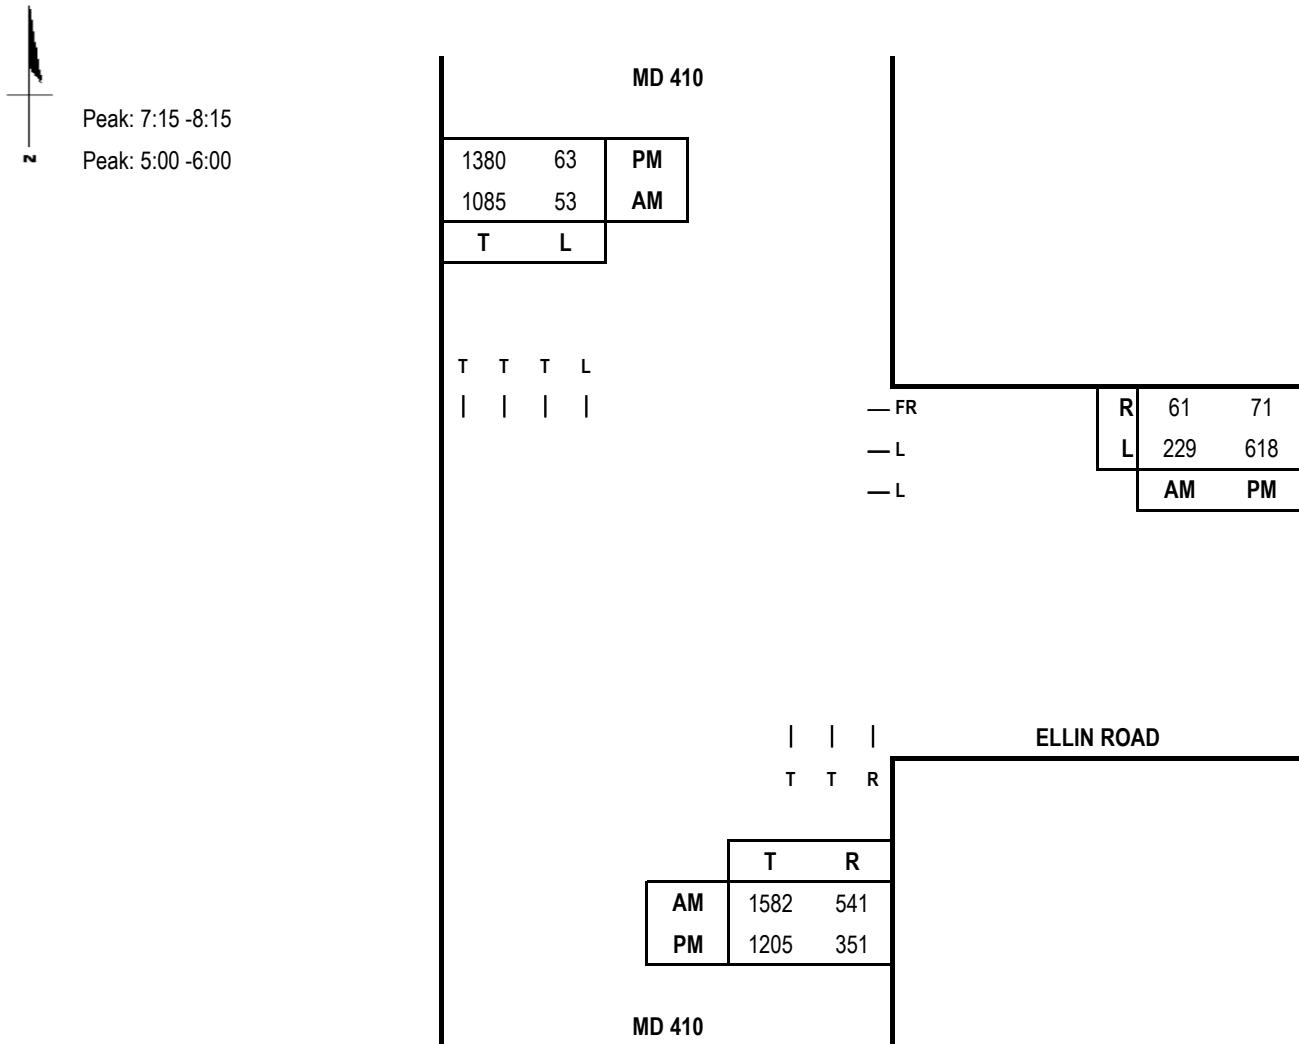**Capacity Analysis**

Morning Peak Hour						
Dir	Thru Volumes		+ Opposing Lefts		AM CLV	CLV
	VOL	x LUF	= Total	VOL	x LUF	
WB	229	0.60	137			137
NB	1582	0.55	870	53	1.00	53
SB	1085	0.37	401			923
CLV TOTAL=				1,060		
Level of Service (LOS)=				B		

Scenario ID - TOT13

CLV V/C = 0.66

Evening Peak Hour						
Dir	Thru Volumes		+ Opposing Lefts		PM CLV	CLV
	VOL	x LUF	= Total	VOL	x LUF	
WB	618	0.60	371			371
NB	1205	0.55	663	63	1.00	63
SB	1380	0.37	511			726
CLV TOTAL=				1,097		
Level of Service (LOS)=				B		
CLV V/C =				0.69		

CRITICAL LANE VOLUME (CLV) METHODOLOGY

for Prince Georges County



E/W Road: Garden City Dr


Date of Count: 6/9/2016

N/S Road: Parking Access

Day of Count: Thursday

Conditions: Existing Traffic

Analyst: Richard Huang

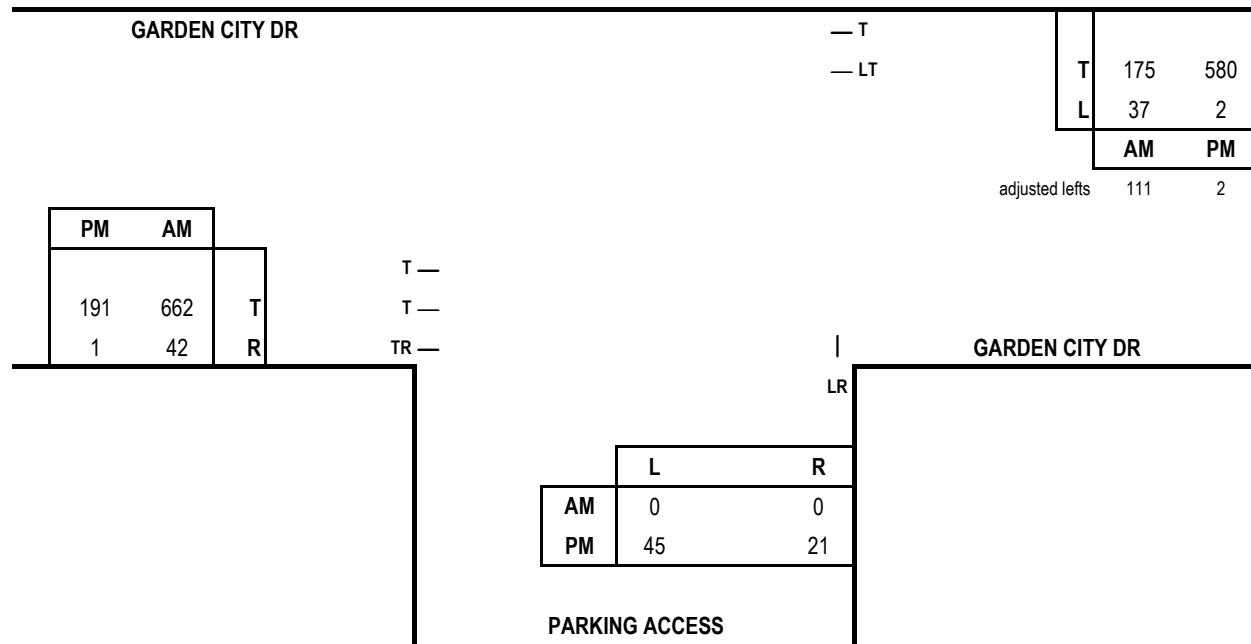

Capacity Analysis - North/South Split

Morning Peak Hour							
Dir	Thru Volumes		+ Opposing Lefts		AM CLV		
	VOL	x LUF	= Total	VOL	x LUF = Total		
NB	0	1.00	0			0	
SB	0	0.00	0			0	
EB	704	0.37	260	37	1.00	37	297
WB	286	0.55	157	0	0.00	0	
CLV TOTAL=				297			
Level of Service (LOS)=							
AM V/C =0.19							

Evening Peak Hour							
Dir	Thru Volumes		+ Opposing Lefts		PM CLV		
	VOL	x LUF	= Total	VOL	x LUF = Total		
NB	66	1.00	66			66	
SB	0	0.00	0			0	
EB	192	0.37	71	2	1.00	2	320
WB	582	0.55	320	0	0.00	0	
CLV TOTAL=				386			
Level of Service (LOS)=							
PM V/C =0.24							

CRITICAL LANE VOLUME (CLV) METHODOLOGY

for Prince Georges County



E/W Road: Garden City Dr


Date of Count: 6/9/2016

N/S Road: Parking Access

Day of Count: Thursday

Conditions: Background Traffic

Analyst: Richard Huang

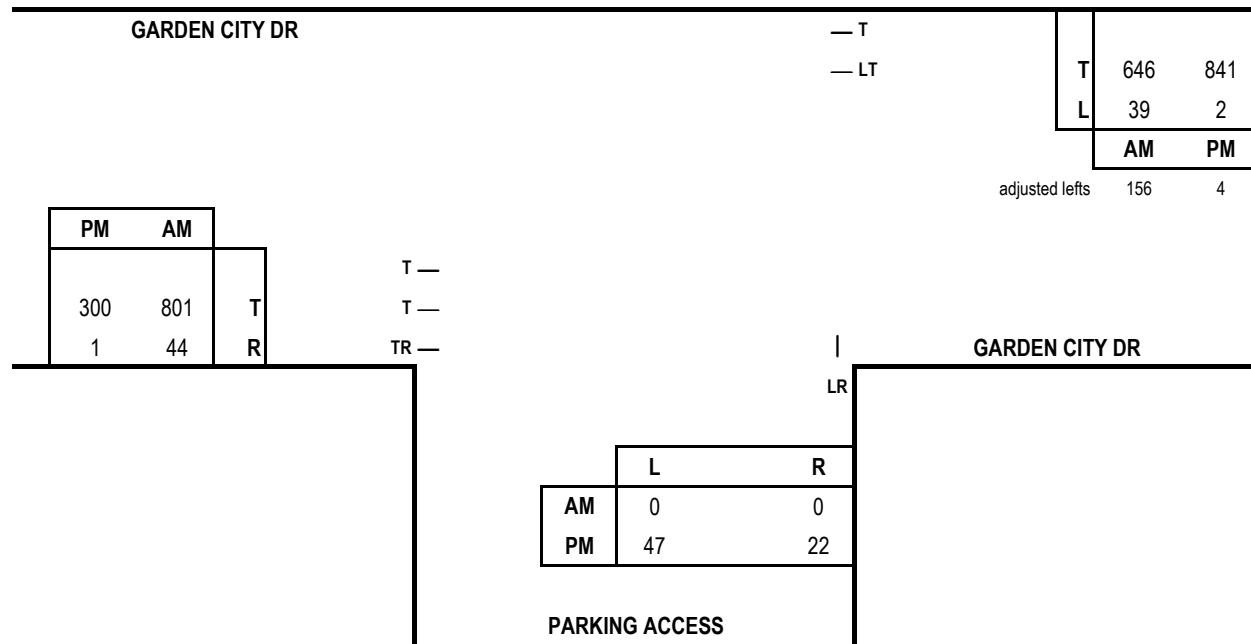

Capacity Analysis - North/South Split

Morning Peak Hour							
Dir	Thru Volumes		+ Opposing Lefts		AM CLV		
	VOL	x LUF	= Total	VOL	x LUF	= Total	
NB	0	1.00	0			0	
SB	0	0.00	0			0	
EB	845	0.37	313	39	1.00	39	441
WB	802	0.55	441	0	0.00	0	
CLV TOTAL =				441			
Level of Service (LOS) =							
AM V/C = 0.28							

Evening Peak Hour							
Dir	Thru Volumes		+ Opposing Lefts		PM CLV		
	VOL	x LUF	= Total	VOL	x LUF	= Total	
NB	69	1.00	69			69	
SB	0	0.00	0			0	
EB	301	0.37	111	2	1.00	2	465
WB	845	0.55	465	0	0.00	0	
CLV TOTAL =				534			
Level of Service (LOS) =							
PM V/C = 0.33							

CRITICAL LANE VOLUME (CLV) METHODOLOGY

for Prince Georges County



E/W Road: Garden City Dr


Date of Count: 6/9/2016

N/S Road: Parking Access

Day of Count: Thursday

Conditions: Total Traffic

Analyst: Richard Huang

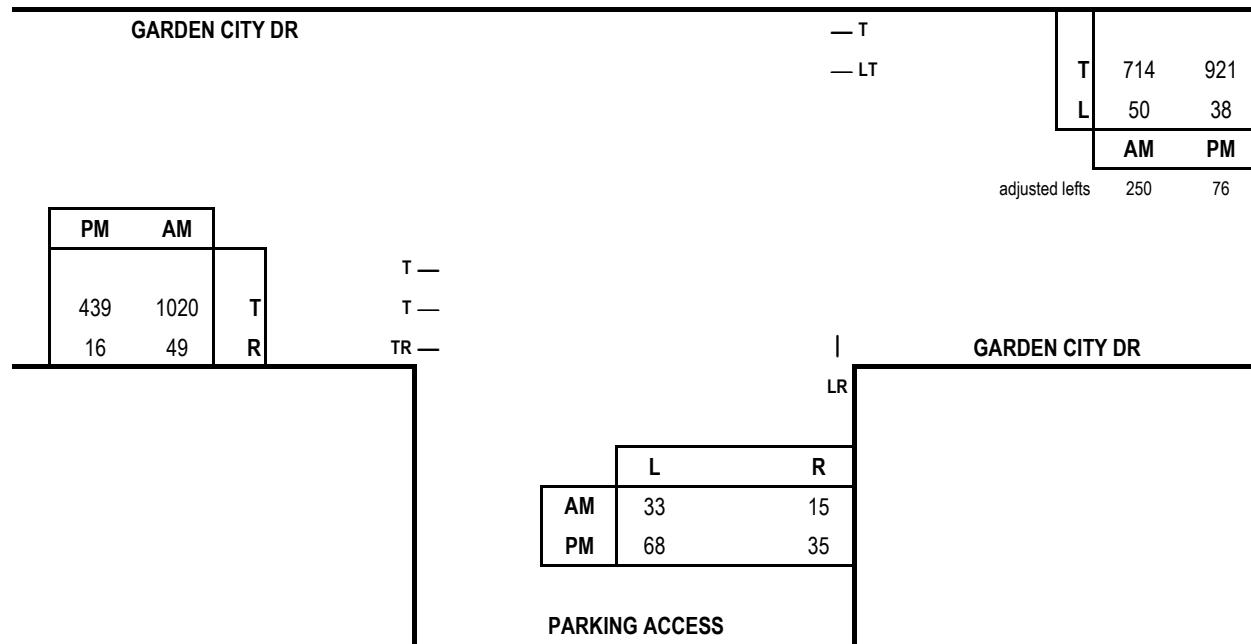

Capacity Analysis - North/South Split

Morning Peak Hour							
Dir	Thru Volumes		+ Opposing Lefts		AM CLV		
	VOL	x LUF	= Total	VOL	x LUF = Total		
NB	48	1.00	48			48	
SB	0	0.00	0			0	
EB	1069	0.37	396	50	1.00	50	530
WB	964	0.55	530	0	0.00	0	
CLV TOTAL=				578			
Level of Service (LOS)=							
AM V/C =0.36							

Evening Peak Hour							
Dir	Thru Volumes		+ Opposing Lefts		PM CLV		
	VOL	x LUF	= Total	VOL	x LUF = Total		
NB	103	1.00	103			103	
SB	0	0.00	0			0	
EB	455	0.37	168	38	1.00	38	548
WB	997	0.55	548	0	0.00	0	
CLV TOTAL=				651			
Level of Service (LOS)=							
PM V/C =0.41							

CRITICAL LANE VOLUME (CLV) METHODOLOGY

for Prince Georges County

E/W Road Name: Parking Lot

Date of Count: 5/12/2016

N/S Road Name: Garden City Drive

Day of Count: Thursday

Conditions: Existing Traffic

Analyst: Richard Huang



AM Peak: 07:30-8:30

PM Peak: 04:00-5:00

GARDEN CITY DRIVE

2	937	PM
90	390	AM
R	T	

TR T T
| | |

PARKING LOT

PM	AM
3	2
65	1

L —
R —

AM	
PM	

GARDEN CITY DRIVE

Capacity Analysis

Morning Peak Hour							
Dir	Thru Volumes		+ Opposing Lefts		AM CLV		
	VOL	x LUF	= Total	VOL	x LUF	= Total	
EB	2	1.00	2			2	
NB	0	0.00	0				
SB	480	0.37	178	0	0.00	0	178
CLV TOTAL =				180			
Level of Service (LOS) =				A			

Scenario ID - EXIST15

CLV V/C = 0.11

Evening Peak Hour							
Dir	Thru Volumes		+ Opposing Lefts		PM CLV		
	VOL	x LUF	= Total	VOL	x LUF	= Total	
EB	65	1.00	65				65
NB	0	0.00	0				
SB	939	0.37	347	0	0.00	0	347
CLV TOTAL =				412			
Level of Service (LOS) =				A			
CLV V/C =				0.26			

CRITICAL LANE VOLUME (CLV) METHODOLOGY

for Prince Georges County

E/W Road Name: Parking Lot



N/S Road Name: Garden City Drive

Conditions: Background Traffic

Date of Count: 5/12/2016

Day of Count: Thursday

Analyst: Richard Huang

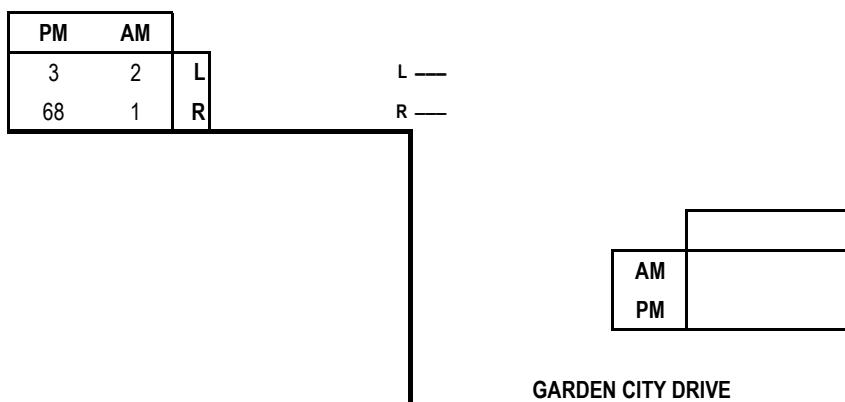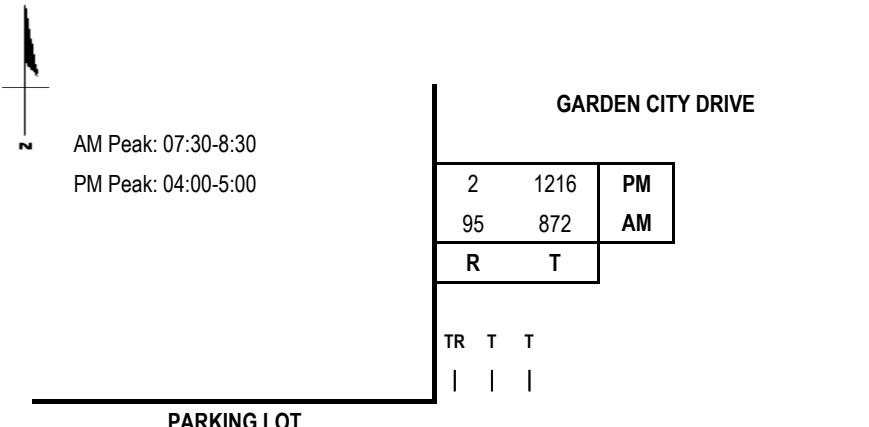

Capacity Analysis

Morning Peak Hour						
Dir	Thru Volumes		+ Opposing Lefts		AM CLV	
	VOL	x LUF	= Total	VOL	x LUF = Total	
EB	2	1.00	2			2
NB	0	0.00	0			358
SB	967	0.37	358	0	0.00 0	360
CLV TOTAL=				360		
Level of Service (LOS)=				A		

Scenario ID - BACK15

CLV V/C =0.23

Evening Peak Hour						
Dir	Thru Volumes		+ Opposing Lefts		PM CLV	
	VOL	x LUF	= Total	VOL	x LUF = Total	
EB	68	1.00	68			68
NB	0	0.00	0			451
SB	1218	0.37	451	0	0.00 0	519
CLV TOTAL=				519		
Level of Service (LOS)=				A		
CLV V/C =0.32						

CRITICAL LANE VOLUME (CLV) METHODOLOGY

for Prince Georges County

E/W Road Name: Parking Lot


Date of Count: 5/12/2016

N/S Road Name: Garden City Drive

Day of Count: Thursday

Conditions: Total Traffic

Analyst: Richard Huang

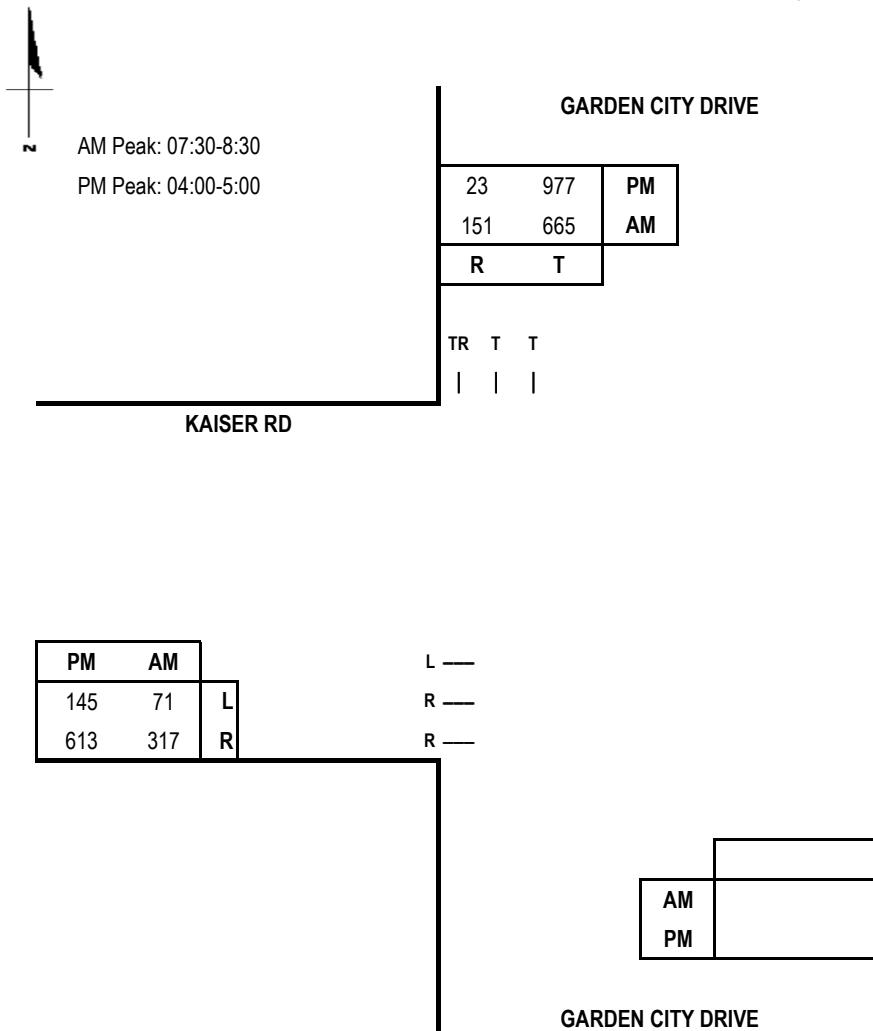**Capacity Analysis**

Morning Peak Hour						
Dir	Thru Volumes			+ Opposing Lefts		AM CLV
	VOL	x LUF	= Total	VOL	x LUF	
EB	317	0.55	174			174
NB	0	0.00	0			302
SB	816	0.37	302	0	0.00	0
CLV TOTAL=				476		

Level of Service (LOS) = **A**
CLV V/C = 0.3


Evening Peak Hour						
Dir	Thru Volumes			+ Opposing Lefts		PM CLV
	VOL	x LUF	= Total	VOL	x LUF	
EB	613	0.55	337			337
NB	0	0.00	0			370
SB	1000	0.37	370	0	0.00	0
CLV TOTAL=				707		
Level of Service (LOS) =						A
						CLV V/C = 0.44

APPENDIX C

Trip Assignment for

Background Developments




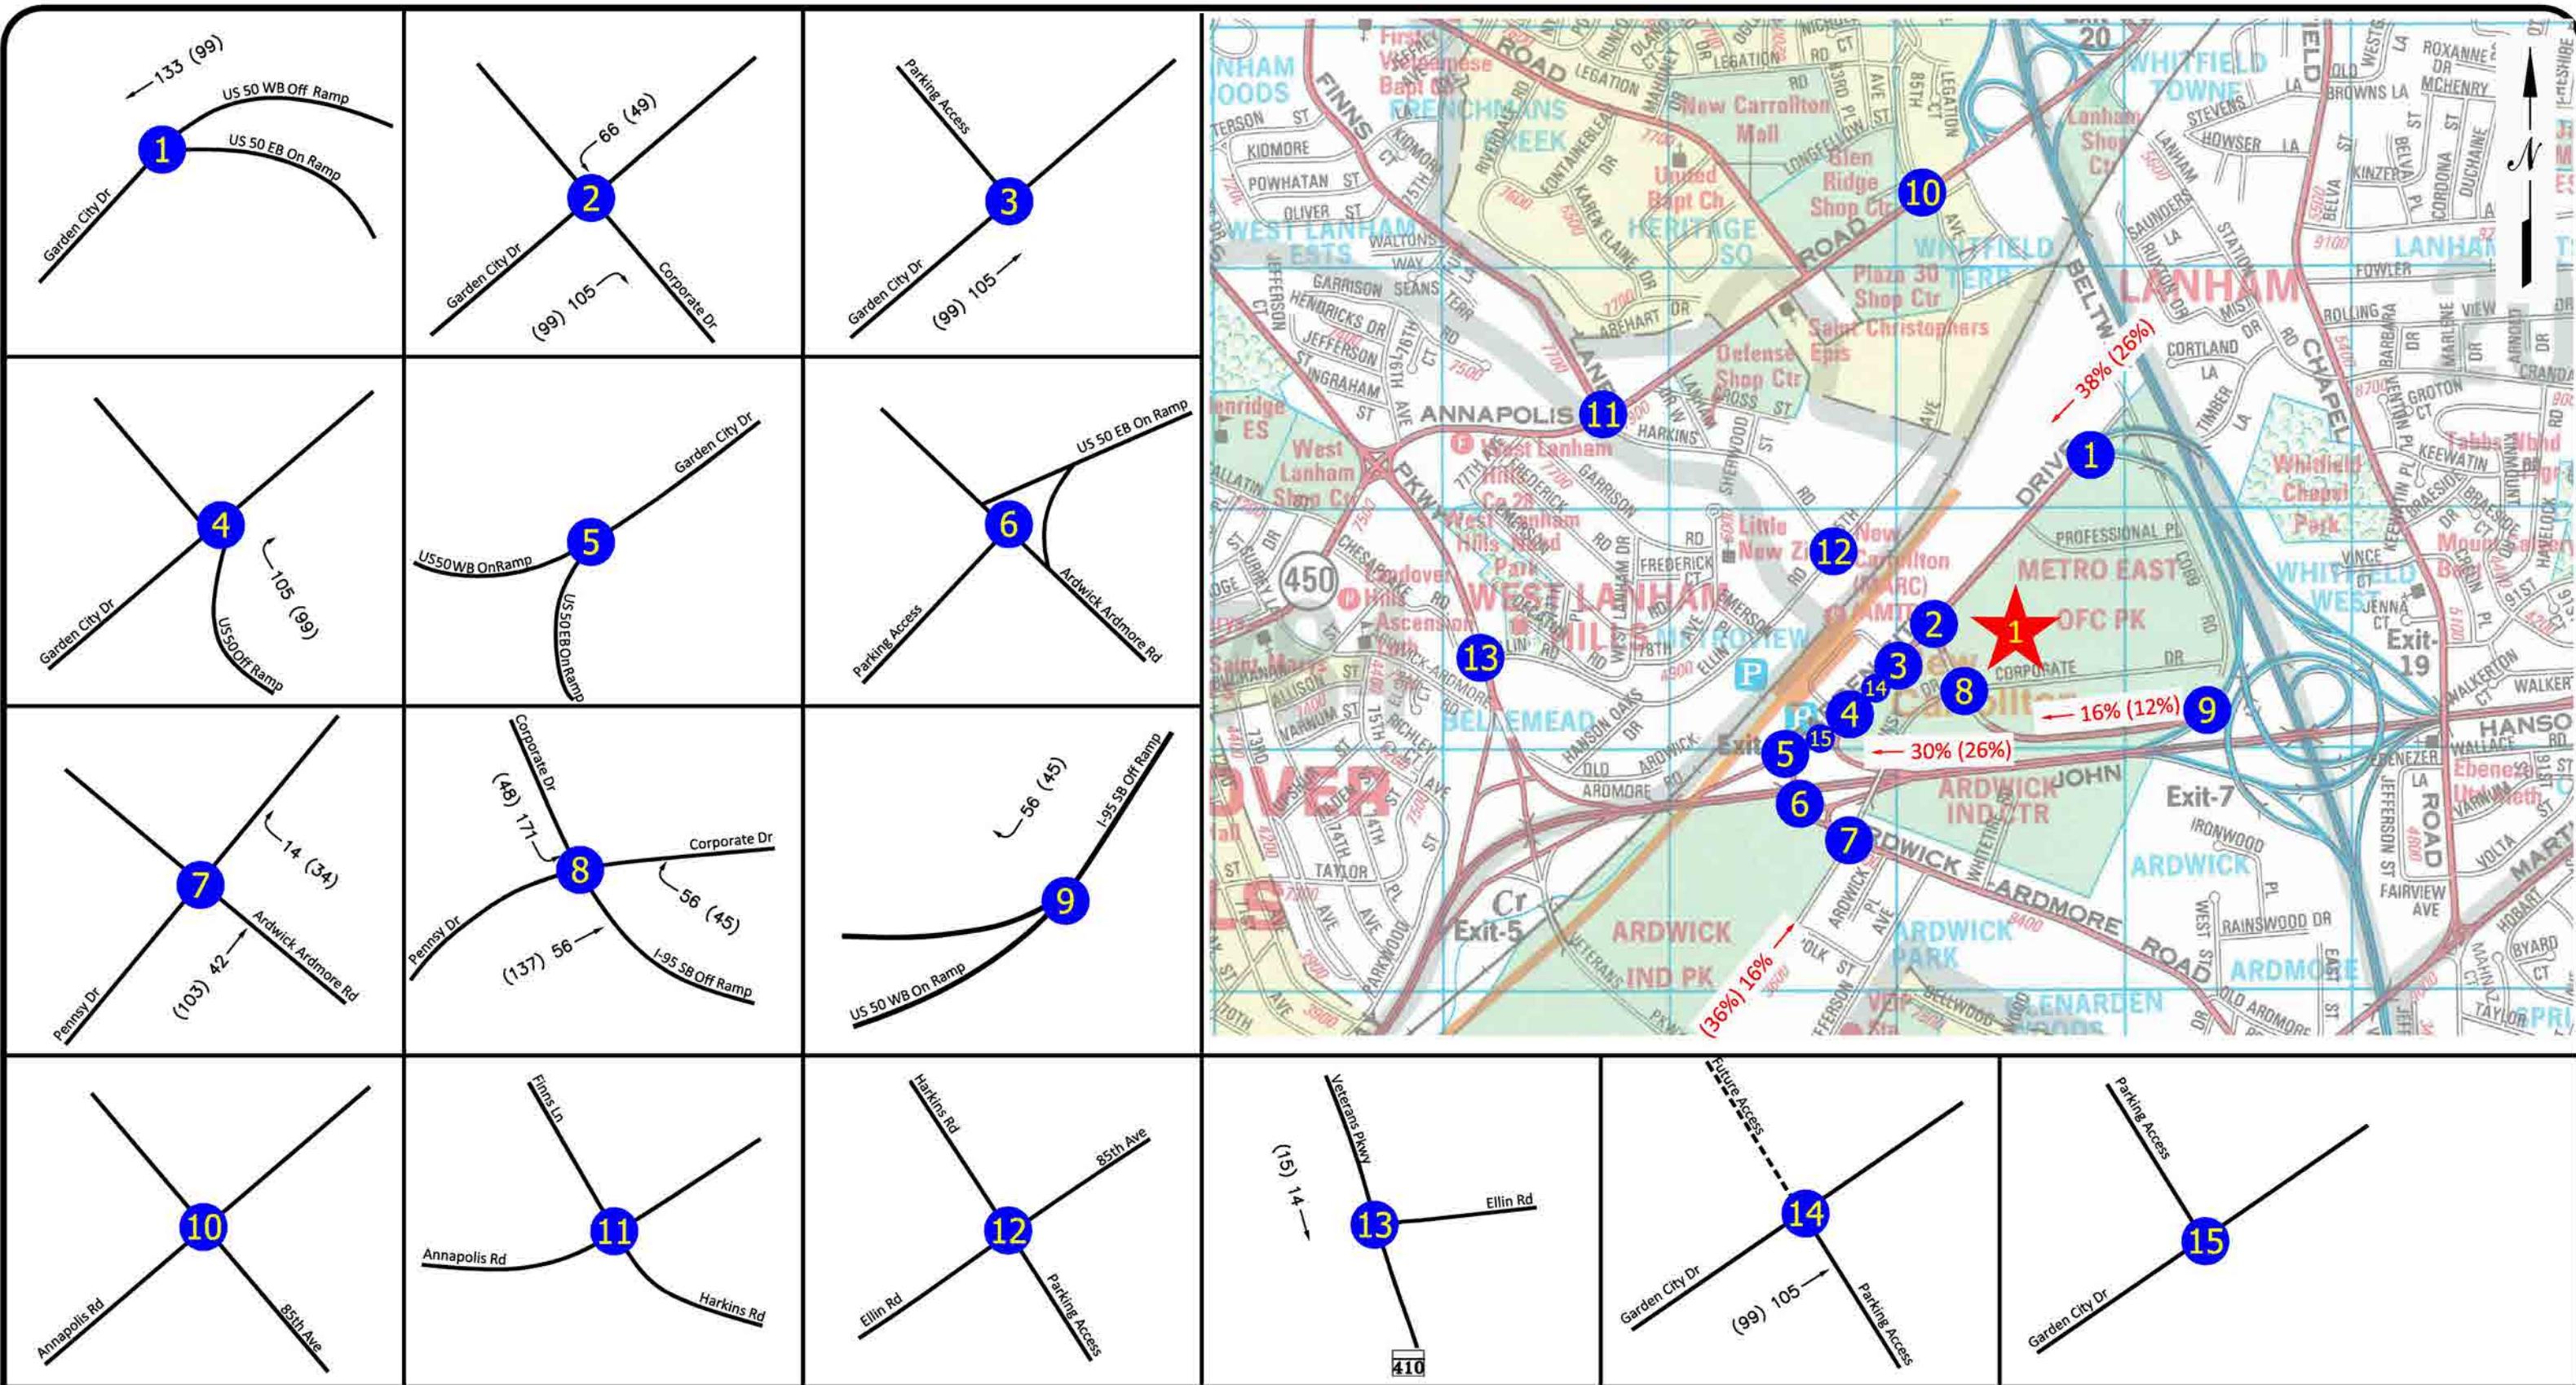

NOT TO SCALE
 00 - MORNING PEAK HOUR
 (00) - EVENING PEAK HOUR

Garden City
 In: 350 (380)


EXHIBIT C-1
TRIP ASSIGNMENT FOR
GARDEN CITY (INBOUND TRIPS)

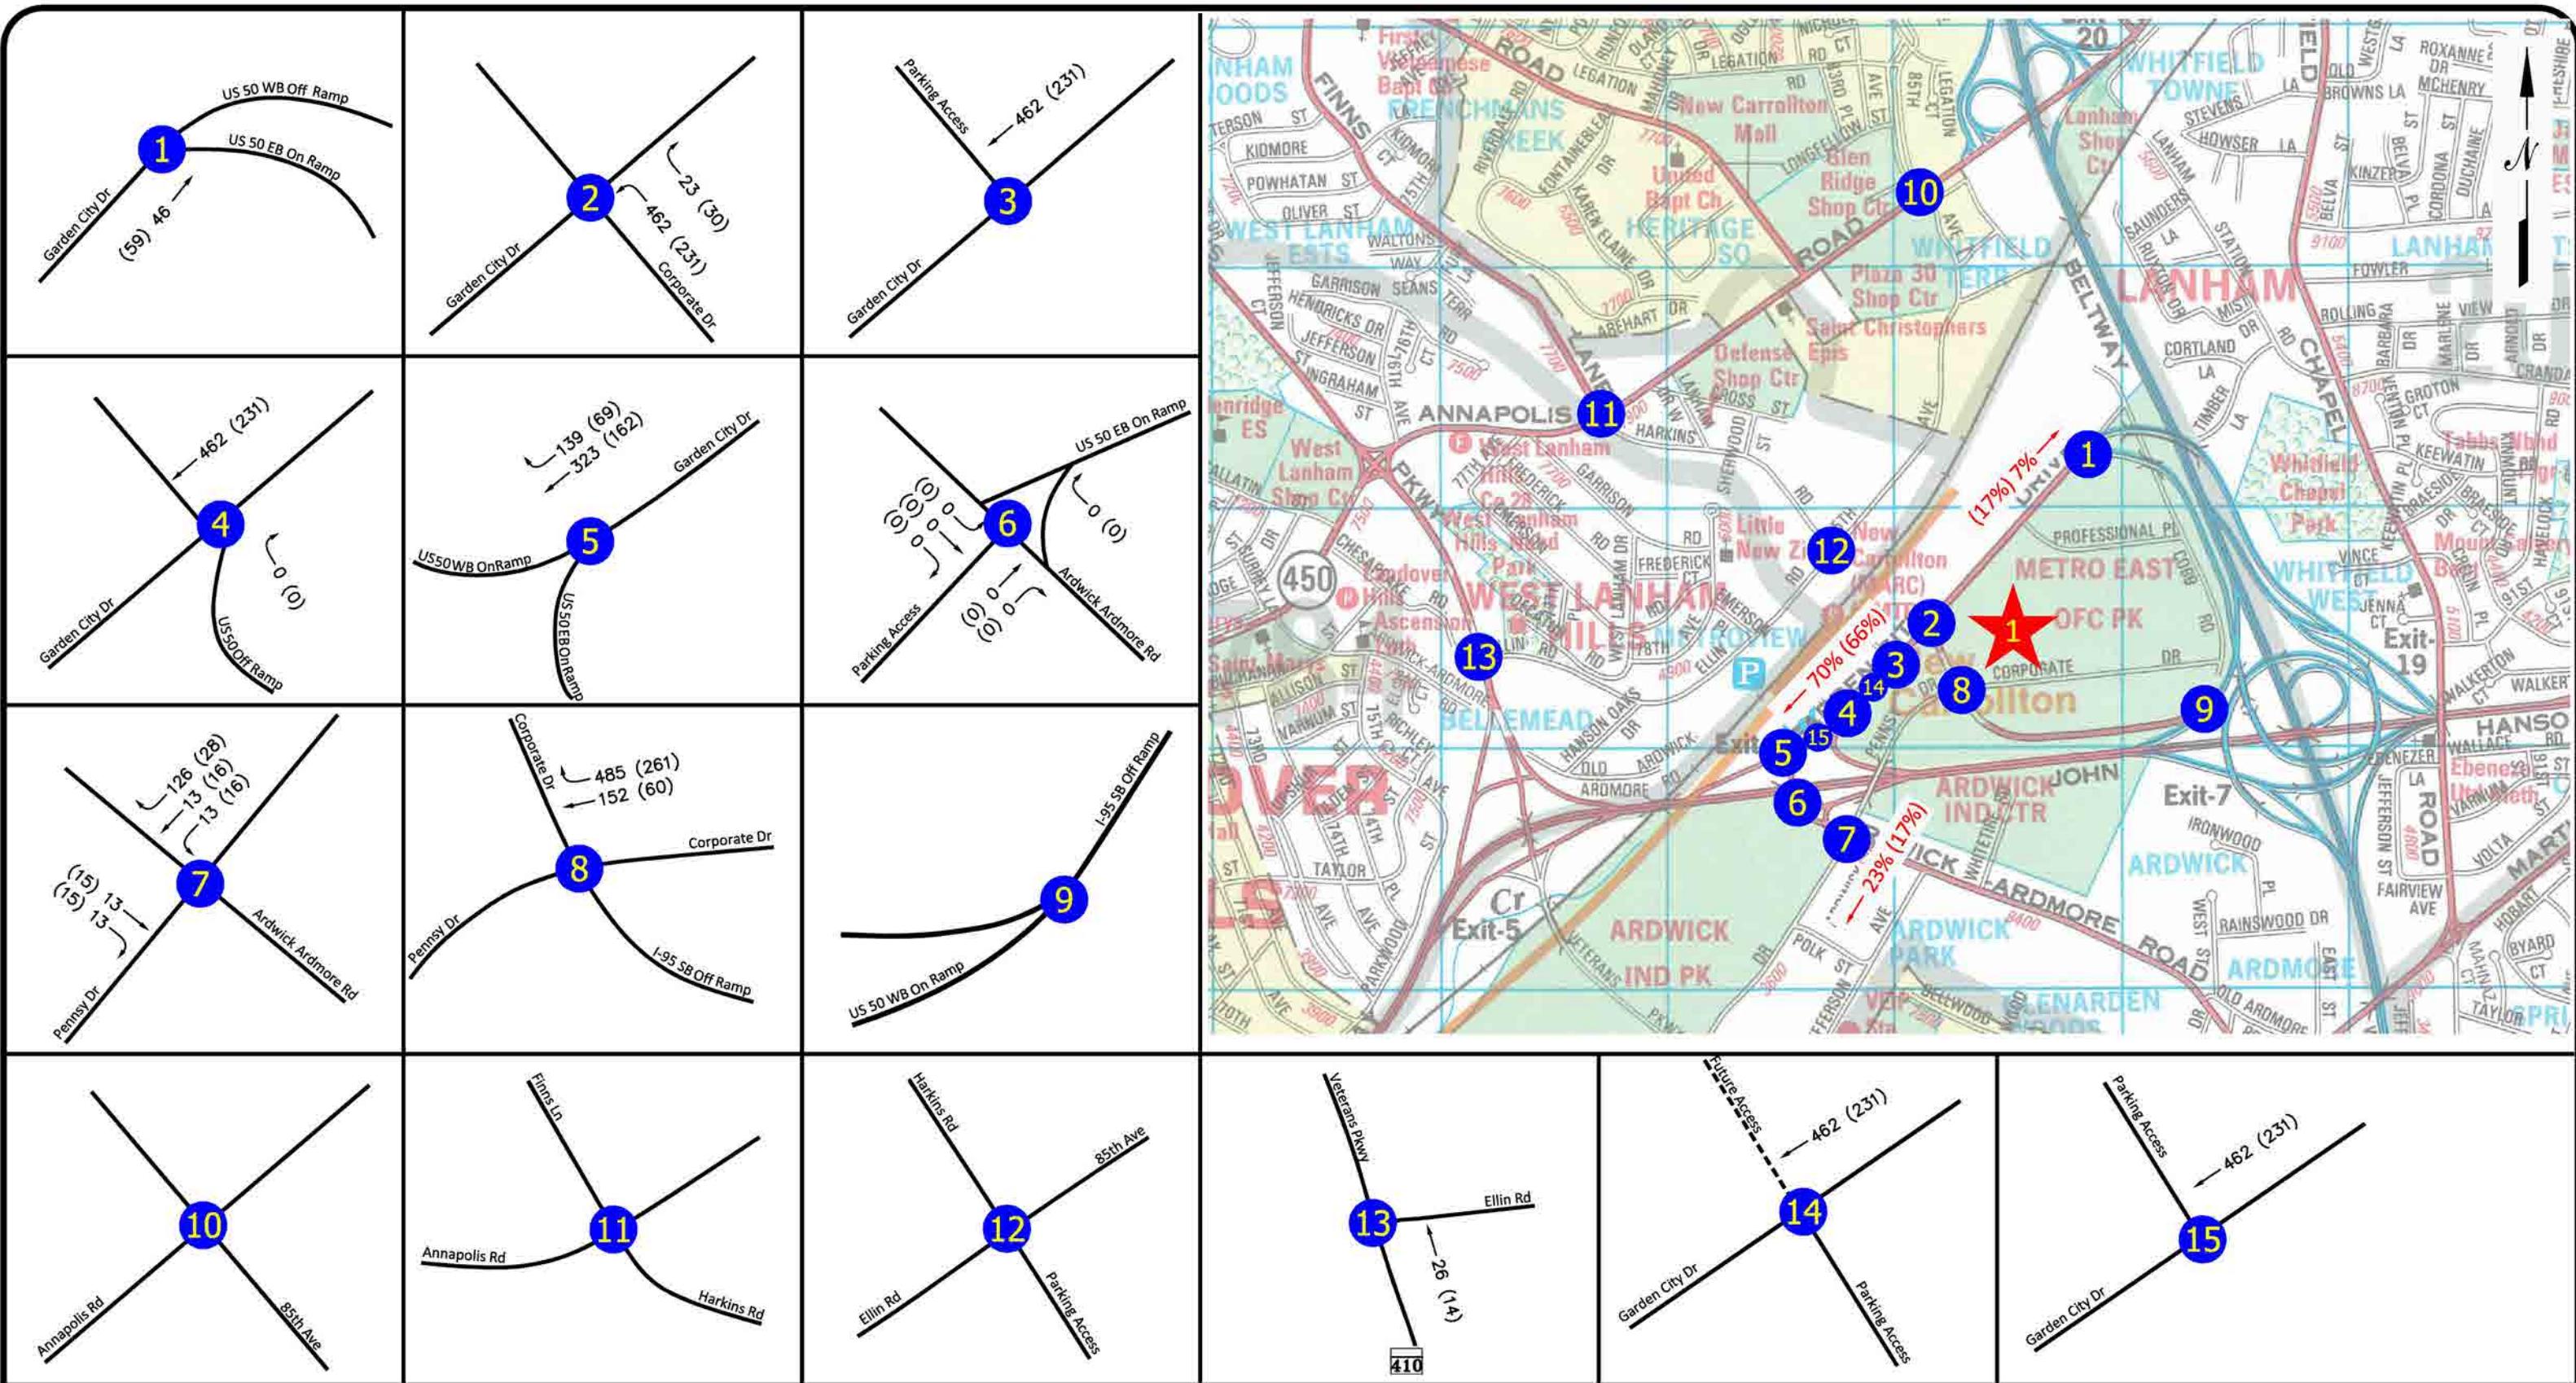

NOT TO SCALE
00 - MORNING PEAK HOUR
(00) - EVENING PEAK HOUR

Garden City
Out: 660 (350)

EXHIBIT C-2
TRIP ASSIGNMENT FOR
GARDEN CITY (OUTBOUND TRIPS)

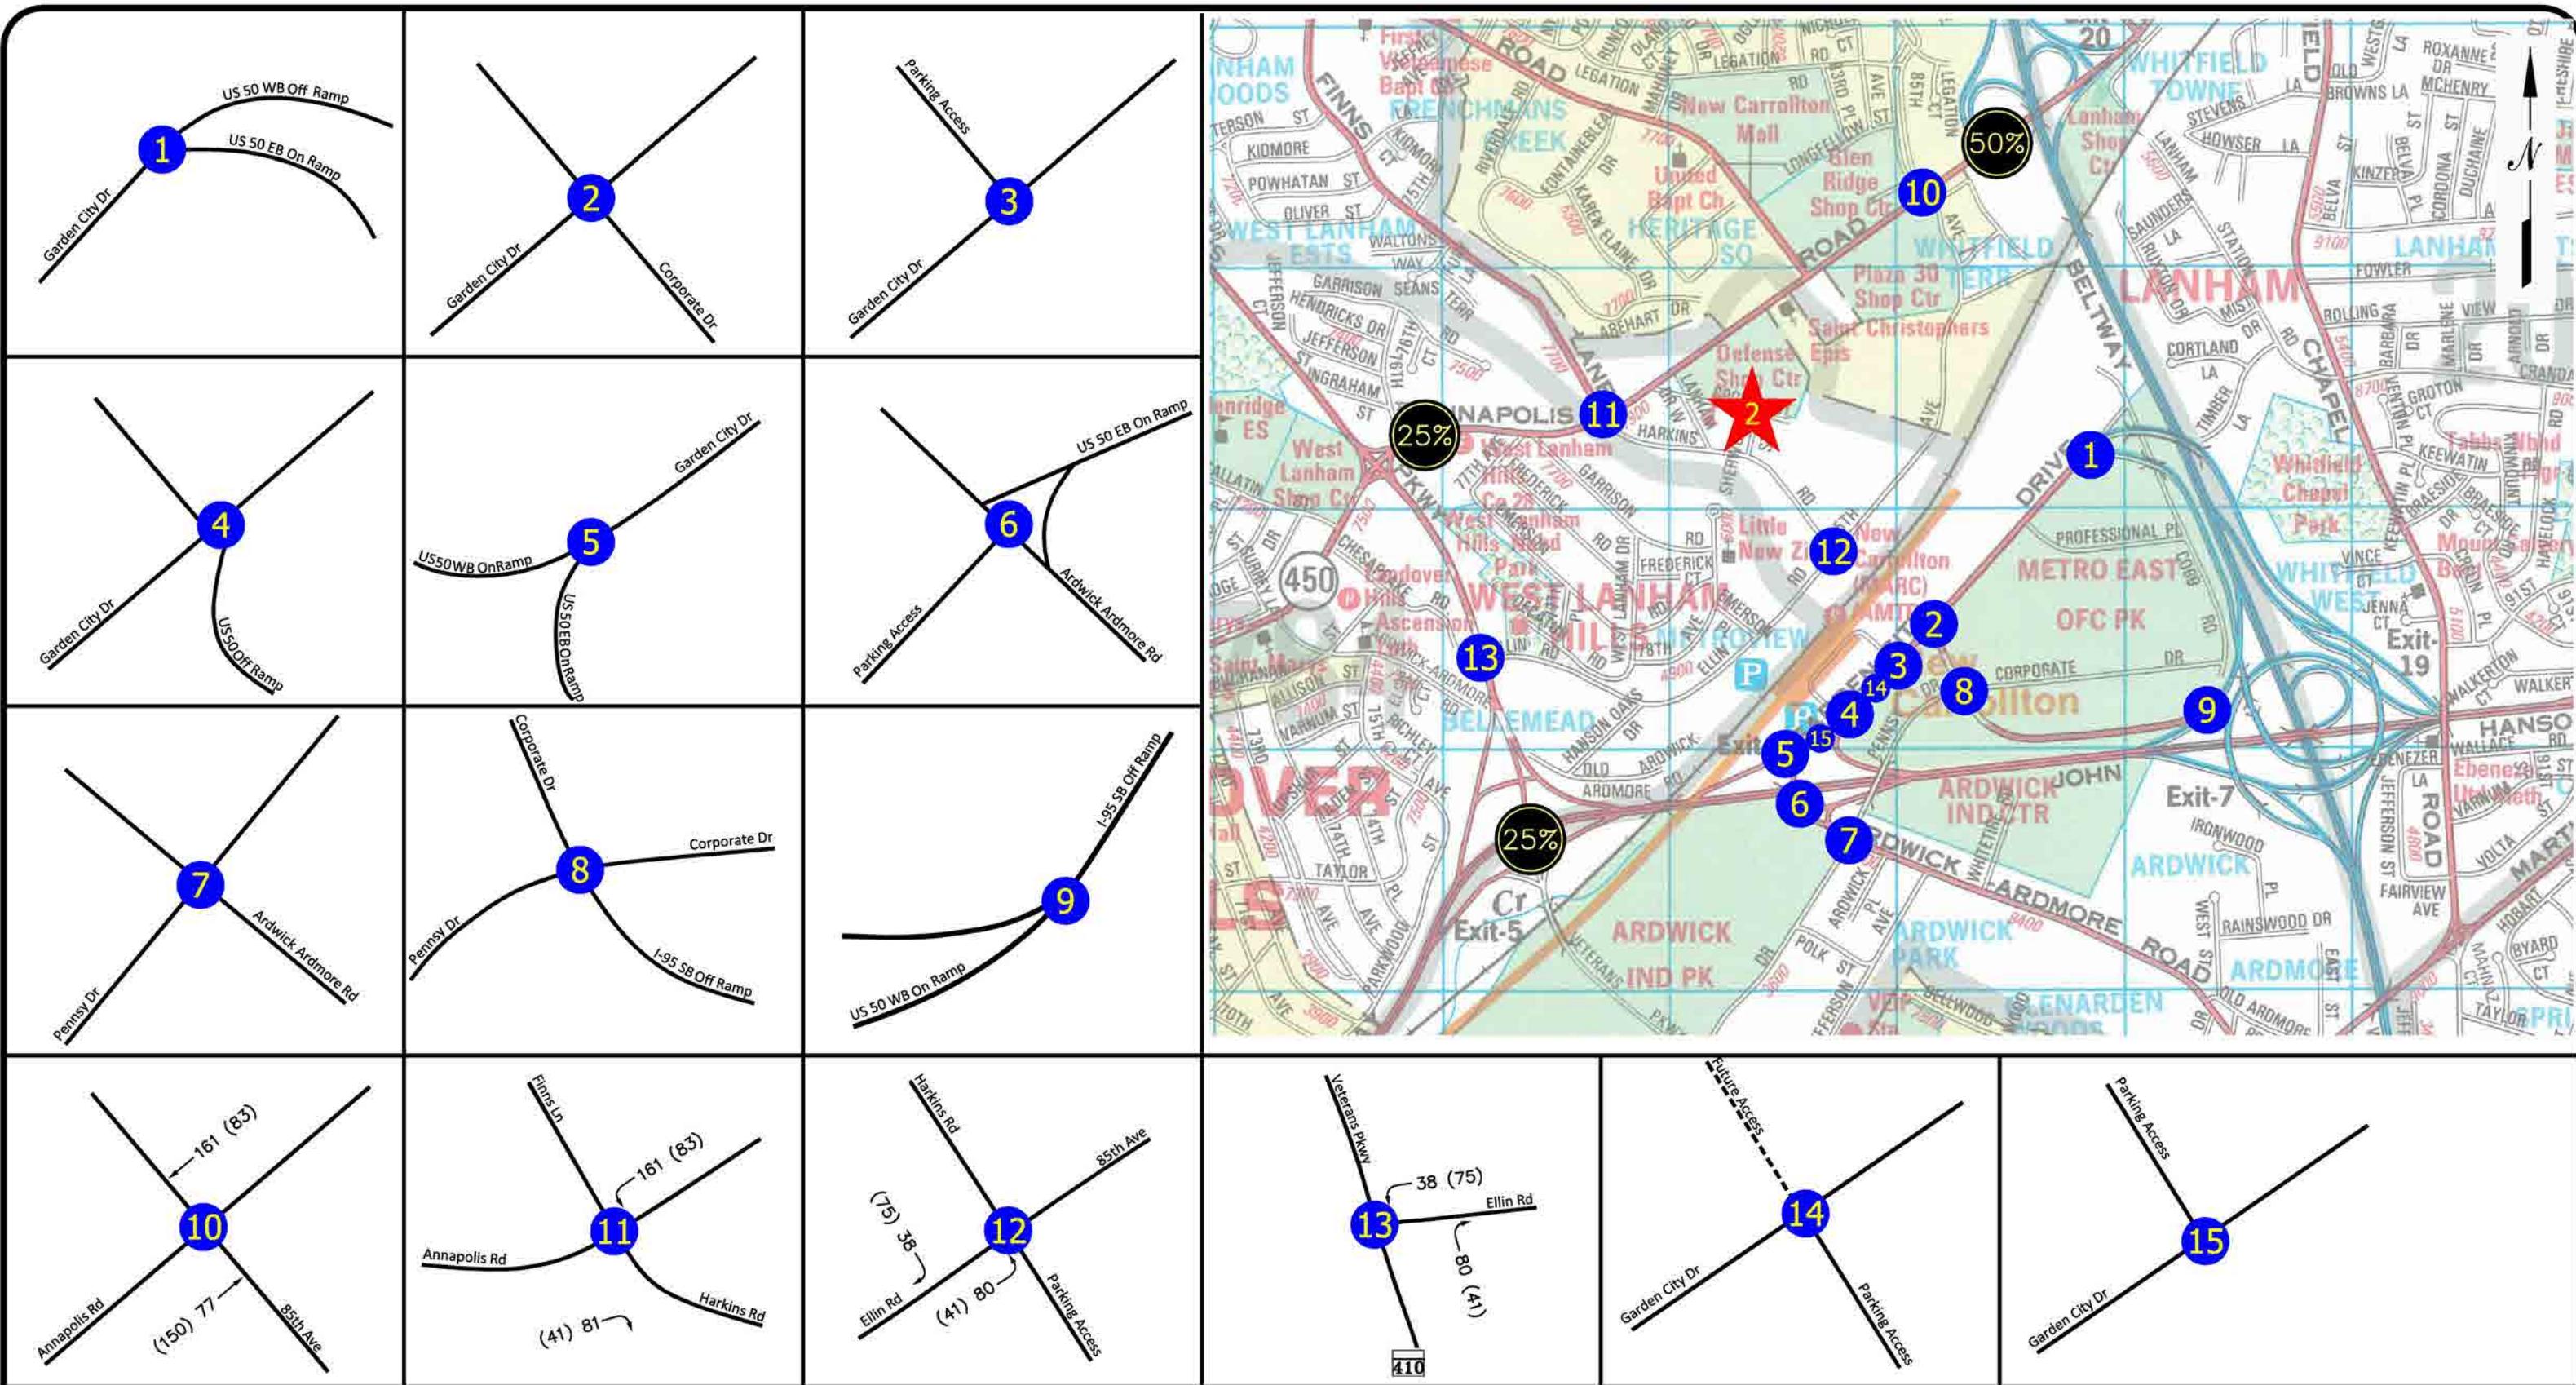

NOT TO SCALE
 00 - MORNING PEAK HOUR
 (00) - EVENING PEAK HOUR

in: 322 (165)
 Out: 153 (300)

EXHIBIT C-3
TRIP ASSIGNMENT FOR
CARROLLTON STATION NORTH

APPENDIX D

**Trip Generation Details &
Trips Assignment for
Subject Site**



4.1.1.2 Trip Generation

The 'Guidelines for the Analysis of the Traffic Impact of Development Proposals', proposed by the Maryland-National Capital Park and Planning Commission (MNCPPC), was used as a guideline to estimate the hourly traffic volumes generated from the proposed development at the New Carrollton Metro Station. The ITE Trip Generation Manual 9th Edition was used as a supplementary guideline to estimate the trip generation for land use not documented in the MNCPPC Guidelines.

Table 5 shows the land use type and trip generation rates/equations used to estimate total generated trips. Table 6 shows the calculated site-generated trips for each land use type. Please note the total site-generated trips shown in Table 6 include all the trips made by transit, vehicle, and walk/bike. Column "In" shows entering trips and column "Out" shows exiting trips. The internal trips, pass-by trips and trips made by transit and walk/bike will be subtracted from Table 6 to calculate the hourly vehicular trips, which will be discussed in detail in the following sections.

Table 5: Land Use Type and Trip Generation Rates/Equations

Use	Land Use Type	Source	Feature	Rate/ Equations (AM) ²	In/Out Rate (AM)	Rate/ Equations (PM) ²	In/Out Rate (PM)
Office (≤108k) ¹	General Office Building	MNCPPC Guideline	150K SF	2.0 × Area	90%/10%	1.85 × Area	19%/81%
Office (>108k) ¹	General Office Building	ITE	700K SF	$Exp(0.8 \times \ln(Area+1.57))$	88%/12%	$1.12 \times Area + 78.45$	17%/83%
Res.	Apartments (garden and mid-rise)	MNCPPC Guideline	1,080 Units	0.52 × Unit	19%/81%	0.6 × Unit	65%/35%
Retail	Specialty Retail Center	ITE	140K SF	3.25 × Area	48%/52%	2.71 × Area	44%/56%
Hotel	Hotel	ITE	150 Rooms	0.53 × Room	58%/42%	0.6 × Room	51%/49%

Notes:

1. M-NCPPC Guidelines notes "office aggregations greater than 108,000 square feet should use the fitted curve for 'general office building' in the ITE Trip Generation Manual with in/out distributions."

Table 6: Site-Generated Total Trips (including Various Modes)

Land Use	AM			PM		
	Total Trips	In	Out	Total Trips	In	Out
Office	1,425	1,259	166	1,296	227	1,069
Residential	456	220	236	380	168	212
Retail	606	115	491	700	456	244
Hotel	80	46	34	90	46	44
Total	2,567	1,640	927	2,466	897	1,569

4.1.1.3 Internal Trips

Internal trips are the trips made within the development area. Internal trips have been removed from the total generated trips (shown in Table 6) to estimate the total external trips – the trips generated from the outside of the development site. The 'NCHRP Report 684 – Enhancing Internal Trip Capture Estimation for Mixed- Use Development' was used to estimate internal trips for the proposed development at the New Carrollton station. The methodology presented in the NCHRP report is an improvement to the internal trip estimation process provided in the ITE Trip Generation Handbook. This enhanced method

expands the internal trip estimation to cover both AM and PM peak periods, including six land uses typically found at mixed use developments and takes into account the proximity of interacting land uses.

Table 7 shows the internal trip rates of each land use pair presented in NCHRP Report 684. Table 8 shows the total estimated internal and external trips for the proposed developments. Please note the external trips include transit, vehicle and walk/bike trips.

Table 7: Internal Trip Rates (source: NCHRP Report 684 – Table 105 and 106)

Land Use Pair		AM Peak	PM Peak	Land Use Pair		AM Peak	PM Peak
From Office	To Office	0%	0%	To Office	From Office	0%	0%
	To Retail	28%	20%		From Retail	4%	31%
	To Residential	1%	2%		From Residential	3%	57%
	To Hotel	0%	0%		From Hotel	3%	0%
From Retail	To Office	29%	2%	To Retail	From Office	32%	8%
	To Retail	0%	0%		From Retail	0%	0%
	To Residential	14%	26%		From Residential	17%	10%
	To Hotel	0%	5%		From Hotel	4%	2%
From Residential	To Office	2%	4%	To Residential	From Office	0%	4%
	To Retail	1%	42%		From Retail	2%	46%
	To Residential	0%	0%		From Residential	0%	0%
	To Hotel	0%	3%		From Hotel	0%	0%
From Hotel	To Office	75%	0%	To Hotel	From Office	0%	0%
	To Retail	14%	16%		From Retail	0%	17%
	To Residential	0%	2%		From Residential	0%	12%
	To Hotel	0%	0%		From Hotel	0%	0%

Table 8: Internal and External Trips

Land Use	AM						PM					
	Internal		External		Total		Internal		External		Total	
	In	Out	In	Out	In	Out	In	Out	In	Out	In	Out
Office	86	46	1,173	120	1,259	166	14	31	213	1,038	227	1,069
Retail	56	52	164	184	220	236	33	67	135	145	168	212
Residential	2	15	113	476	115	491	73	33	383	211	456	244
Hotel	0	31	46	3	46	34	14	3	32	41	46	44
Total	144	144	1,496	783	1,640	927	134	134	763	1,435	897	1,569

4.1.1.4 Mode Share

The external trips were divided into transit, vehicle and walk/bike trips by defining the mode share of the development. The vehicle trips were used for the traffic analysis. The study used the data from the '2005 Development-Related Ridership Survey', conducted by WMATA. The 2005 Survey studies the mode share of office, residential, hotel and retail trips near Metrorail stations in the Washington D.C. metropolitan area. Table 9 shows the average mode share of the studied Metro stations in the 2005 Survey within the ¼ mile of walking distance to the Metro station by land use. Future development at the New Carrollton Metro Station is assumed the same mode share as shown in Table 9. Table 10 shows the hourly entering and exiting vehicular trips generated from the development (excluding retail trips). Please

note the retail trips shown in Table 10 include the pass-by trips. The following section will discuss the estimation of retail pass-by trips.

Table 9: Mode Share in 2005 Survey and Assumed for New Carrollton Metro Station

	Transit	Auto	Walk/Bike
Office Trips	35%	61%	4%
Retail Trips	36%	31%	33%
Residential Trips	48%	41%	11%
Hotel Trips	36%	25%	39%

Table 10: Entering and Exiting Vehicular Trips excluding Transit and Walk/Bike Trips

Land Use	AM		PM	
	In	Out	In	Out
Office	716	73	130	633
Retail	51	57	42	45
Residential	46	195	157	87
Hotel	12	1	8	10
Total	813	325	329	765

4.1.1.5 Pass-by Trips

Pass-by trips are those of the existing trips on the adjacent roadway and are drawn from adjacent streets to the retail stores in the development site. Therefore, pass-by trips are not newly generated trips and they should be removed from entering and exiting trips of retail shown in Table 10.

Prince George's County's "Transportation Review Guidelines" indicates 40% of pass-by trips to the retail during the PM peak hour. It is assumed that during the AM peak hour the percentage of pass-by trips is identical to the percentage during the PM peak hour. Table 11 shows the pass-by trips and generated vehicular trips of the retail stores at the Metro Core of the New Carrollton Metro Station.

Table 11: Pass-by and Generated Retail Trips

Grocery/Retail	AM		PM	
	In	Out	In	Out
Pass-by Trips	22	22	17	17
Generated Retail Trips	29	35	25	28

Table 12 presents a summary of trip generation results, including internal trips, non-auto trips, pass-by trips and net new trips generated within the new developments at the Metro Core of New Carrollton Metro Station.

Table 12: Summary of Trip Generation Calculation

	AM			PM		
	Total	In	Out	Total	In	Out
Office Generated						
(Internal)	1,425	1,259	166	1,296	227	1,069
(Non-auto)	132	86	46	45	14	31
	504	457	47	488	83	405
Net New Office Trips (Hourly)	789	716	73	763	130	633
Retail Generated						
(Internal)	456	220	236	380	168	212
(Non-auto)	108	56	52	100	33	67
(Pass-bys)	240	113	127	193	93	100
	43	22	22	35	17	17
Net New Retail Trips (Hourly)	65	29	35	52	25	28
Residential Generated						
(Internal)	606	115	491	700	456	244
(Non-auto)	17	2	15	106	73	33
	348	67	281	350	226	124
Net New Residential Trips (Hourly)	241	46	195	244	157	87
Hotel Generated						
(Internal)	80	46	34	90	46	44
(Non-auto)	31	0	31	17	14	3
	36	34	2	55	24	31
Net New Hotel Trips	13	12	1	18	8	10
Total Generated	2,567	1,640	927	2,466	897	1,569
(Total Internal)	288	144	144	268	134	134
(Total Non-auto)	1,128	671	457	1,086	426	660
(Total Pass-bys)	43	22	22	35	17	17
Total Net New Trips (Hourly)	1,108	803	304	1,077	320	758

4.1.1.6 Trip Distribution

The Prince George's County's "Transportation Review Guidelines" suggests using the existing traffic distribution as a guidance to determine the distribution of the generated trips from the development. Figure 7 shows distribution of existing arrival/departure trips to/from the Metro station area during the AM and PM peak hour, from four major roadways connecting to the Metro station area. The total numbers of entering and exiting trips to/from the Metro station area are distributed on near-by roadways based on the distribution rate which is proportional to the existing turning movement counts at each intersection.

Figure 7: Trip Distribution



4.1.2 Adjustment of Park & Ride Trips


The existing WMATA surface parking lots A and B and MTA surface parking lot will be displaced by the future development, and vehicles currently using these facilities will use new parking facilities at Landover Metro Station, which is about 2 miles west of the New Carrollton Metro Station. Thus approximately 360 hourly arrival Park & Ride trips in the AM and 320 hourly departure vehicles in the PM will be removed from the study area in the future.

As an alternative scenario, WMATA proposed to provide 575 Park & Ride spaces within the future new parking garage serving building 4 and 5 (in the northwest corner of the development area). Traffic analysis for this alternative Park & Ride scenario is documented in Appendix C.

4.1.3 Other Development

New development in Garden City and improvements of the Metro Yard will also generate new trips and impose traffic impacts on the east side of the New Carrollton Metro Station. Figure 8 shows the development site of Garden City and Metro Yard. The methodology to estimate the background traffic and the trip generation results are discussed in the following sections.

Figure 10: 2030 Build Lane Configurations

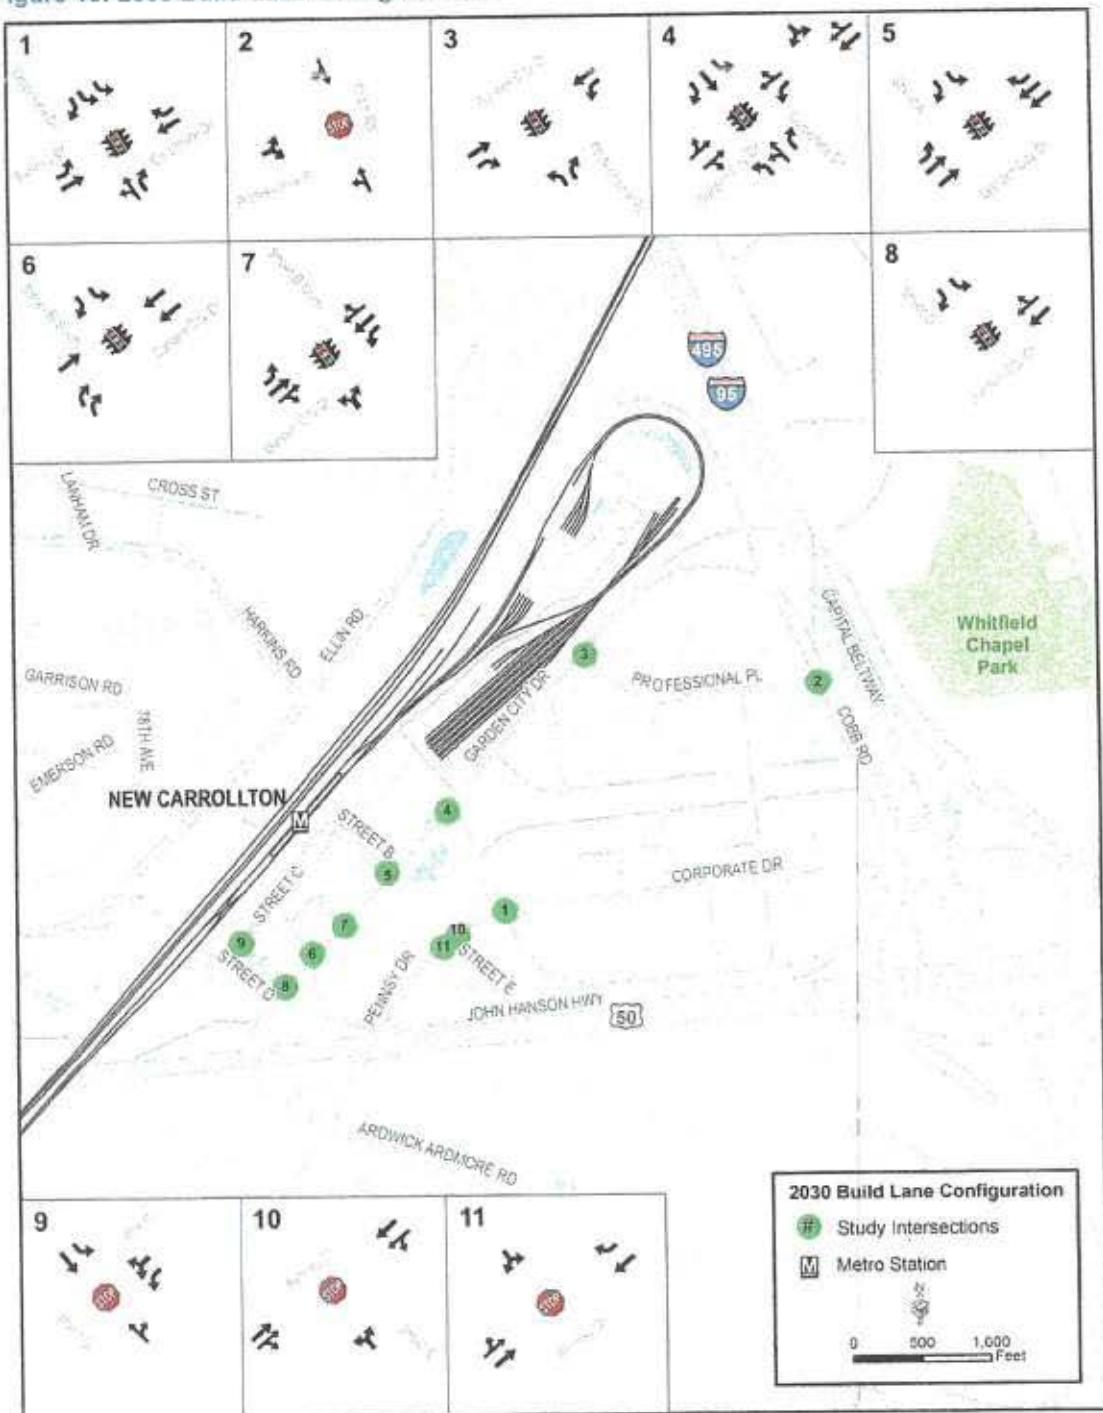

Trip Generation

No.	Land Use	Size	AM Peak Hour			PM Peak Hour			
			In	Out	Total	In	Out	Total	
Building No 1 - 5									
	High-Rise Apartments	265	Units	16	64	80	69	37	106
	Mid-Rise Apartments	350	Units	35	147	182	137	74	211
	Internal Trips Capture			-1	-6	-7	-100	-40	-140
	30% TOD Credit Deduction			-15	-62	-77	-32	-21	-53
	59% Transit/Ped/Bike Deduction			<u>-21</u>	<u>-84</u>	<u>-105</u>	<u>-44</u>	<u>-30</u>	<u>-74</u>
	Net New Residential Trips			14	59	73	30	20	50
	Office	505,000	sq.ft.	909	101	1010	177	758	935
	Internal Trips Capture			-50	-28	-78	-11	-34	-45
	30% TOD Credit Deduction			-258	-22	-280	-50	-217	-267
	39% Transit/Ped/Bike Deduction			<u>-234</u>	<u>-20</u>	<u>-254</u>	<u>-45</u>	<u>-198</u>	<u>-243</u>
	Net New Office Trips			367	31	398	71	309	380
	Retail	120,000	sq.ft.	108	66	174	325	352	677
	Internal Trips Capture			-34	-20	-54	-66	-108	-174
	30% TOD Credit Deduction			-22	-14	-36	-78	-73	-151
	69% Transit/Ped/Bike Deduction			-36	-22	-58	-125	-118	-243
	40% Pass-by Trips			<u>-6</u>	<u>-4</u>	<u>-10</u>	<u>-22</u>	<u>-21</u>	<u>-43</u>
	Net New Retail Trips			10	6	16	34	32	66
	Hotel	180	Rooms	56	39	95	55	53	108
	Internal Trips Capture			0	-31	-31	-12	-7	-19
	30% TOD Credit Deduction			-17	-2	-19	-13	-14	-27
	75% Transit/Ped/Bike Deduction			<u>-29</u>	<u>-5</u>	<u>-34</u>	<u>-23</u>	<u>-24</u>	<u>-47</u>
	Net New Hotel Trips			10	1	11	7	8	15
Net New Trips for Building 1 ~ 5									
	Net New Residential Trips			14	59	73	30	20	50
	Net New Office Trips			367	31	398	71	309	380
	Net New Retail Trips			10	6	16	34	32	66
	Net New Hotel Trips			10	1	11	7	8	15
Net Pass-BY Trips									
	Pass-By Trips			6	4	10	22	21	43



		AM Peak Hour			PM Peak Hour			Sat Peak Hour		
Land Use		IN	OUT	Total	IN	OUT	Total	IN	OUT	Total
Office	Single-Use Trips Gen. Est.	909	101	1010	177	758	935	0	0	0
	Internal Trips	50	28	78	11	34	45	0	0	0
	External Trips	859	73	932	166	724	890	0	0	0
Retail	Single-Use Trips Gen. Est.	108	66	174	325	352	677	0	0	0
	Internal Trips	34	20	54	66	108	174	0	0	0
	External Trips	74	46	120	259	244	503	0	0	0
Restaurant	Single-Use Trips Gen. Est.	0	0	0	0	0	0	0	0	0
	Internal Trips	0	0	0	0	0	0	0	0	0
	External Trips	0	0	0	0	0	0	0	0	0
Cinema/ Entertainment	Single-Use Trips Gen. Est.	0	0	0	0	0	0	0	0	0
	Internal Trips	0	0	0	0	0	0	0	0	0
	External Trips	0	0	0	0	0	0	0	0	0
Residential	Single-Use Trips Gen. Est.	51	211	262	206	111	317	0	0	0
	Internal Trips	1	6	7	100	40	140	0	0	0
	External Trips	50	205	255	106	71	177	0	0	0
Hotel	Single-Use Trips Gen. Est.	56	39	95	55	53	108	0	0	0
	Internal Trips	0	31	31	12	7	19	0	0	0
	External Trips	56	8	64	43	46	89	0	0	0

	AM Peak Hour			AM Peak Hour			Sat Peak Hour		
	IN	OUT	Total	IN	OUT	Total	IN	OUT	Total
Single Use Trips Gen. Est.	1124	417	1541	763	1274	2037	0	0	0
External Trips	1039	332	1371	574	1085	1659	0	0	0
Internal Capture (%)	11%			19%					

**Internal trip capture rate sources: Trip Generation Handbook 3rd Edition, 2014.



EXHIBIT D-2
MULTI-USE TRIP GENERATION WORKSHEET
FOR BUILDING #1~#5

Trip Generation

No.	Land Use	Size	AM Peak Hour			PM Peak Hour			
			In	Out	Total	In	Out	Total	
Building No 6									
	Mid-Rise Apartments	370	Units	37	155	192	144	78	222
	Internal Trips Capture			-1	-2	-3	-23	-8	-31
	30% TOD Credit Deduction			-11	-46	-57	-36	-21	-57
	59% Transit/Ped/Bike Deduction			<u>-15</u>	<u>-63</u>	<u>-78</u>	<u>-50</u>	<u>-29</u>	<u>-79</u>
	Net New Residential Trips			10	44	54	35	20	55
	Retail	15,000	sq.ft.	30	19	49	81	87	168
	Internal Trips Capture			-2	-1	-3	-8	-23	-31
	30% TOD Credit Deduction			-8	-5	-13	-22	-19	-41
	69% Transit/Ped/Bike Deduction			-14	-9	-23	-35	-31	-66
	50% Pass-by Trips			<u>-3</u>	<u>-2</u>	<u>-5</u>	<u>-8</u>	<u>-7</u>	<u>-15</u>
	Net New Retail Trips			3	2	5	8	7	15
Net New Trips for Building 6									
	Net New Residential Trips			10	44	54	35	20	55
	Net New Retail Trips			3	2	5	8	7	15
Net Pass-BY Trips									
	Pass-By Trips			3	2	5	8	7	15



		AM Peak Hour			PM Peak Hour			Sat Peak Hour		
Land Use		IN	OUT	Total	IN	OUT	Total	IN	OUT	Total
Office	Single-Use Trips Gen. Est.	0	0	0	0	0	0	0	0	0
	Internal Trips	0	0	0	0	0	0	0	0	0
	External Trips	0	0	0	0	0	0	0	0	0
Retail	Single-Use Trips Gen. Est.	30	19	49	81	87	168	0	0	0
	Internal Trips	2	1	3	8	23	31	0	0	0
	External Trips	28	18	46	73	64	137	0	0	0
Restaurant	Single-Use Trips Gen. Est.	0	0	0	0	0	0	0	0	0
	Internal Trips	0	0	0	0	0	0	0	0	0
	External Trips	0	0	0	0	0	0	0	0	0
Cinema/ Entertainment	Single-Use Trips Gen. Est.	0	0	0	0	0	0	0	0	0
	Internal Trips	0	0	0	0	0	0	0	0	0
	External Trips	0	0	0	0	0	0	0	0	0
Residential	Single-Use Trips Gen. Est.	37	155	192	144	78	222	0	0	0
	Internal Trips	1	2	3	23	8	31	0	0	0
	External Trips	36	153	189	121	70	191	0	0	0
Hotel	Single-Use Trips Gen. Est.	0	0	0	0	0	0	0	0	0
	Internal Trips	0	0	0	0	0	0	0	0	0
	External Trips	0	0	0	0	0	0	0	0	0

	AM Peak Hour			AM Peak Hour			Sat Peak Hour		
	IN	OUT	Total	IN	OUT	Total	IN	OUT	Total
Single Use Trips Gen. Est.	67	174	241	225	165	390	0	0	0
External Trips	64	171	235	194	134	328	0	0	0
Internal Capture (%)	2%			16%					

**Internal trip capture rate sources: Trip Generation Handbook 3rd Edition, 2014.



EXHIBIT D-4

MULTI-USE TRIP GENERATION WORKSHEET FOR BUILDING #6

Trip Generation

No.	Land Use	Size	AM Peak Hour			PM Peak Hour			
			In	Out	Total	In	Out	Total	
Building No 7 - 9									
	Mid-Rise Apartments	140	Units	14	59	73	55	29	84
	Internal Trips Capture			0	-2	-2	-13	-5	-18
	30% TOD Credit Deduction			-4	-17	-21	-13	-7	-20
	59% Transit/Ped/Bike Deduction			<u>-6</u>	<u>-24</u>	<u>-30</u>	<u>-17</u>	<u>-10</u>	<u>-27</u>
	Net New Residential Trips			4	16	20	12	7	19
	Office	345,000	sq.ft.	621	69	690	121	518	639
	Internal Trips Capture			-4	-5	-9	-2	-5	-7
	30% TOD Credit Deduction			-185	-19	-204	-36	-154	-190
	39% Transit/Ped/Bike Deduction			<u>-168</u>	<u>-18</u>	<u>-186</u>	<u>-32</u>	<u>-140</u>	<u>-172</u>
	Net New Office Trips			264	27	291	51	219	270
	Retail	5,000	sq.ft.	15	10	25	39	42	81
	Internal Trips Capture			-6	-3	-9	-7	-12	-19
	30% TOD Credit Deduction			-3	-2	-5	-10	-9	-19
	69% Transit/Ped/Bike Deduction			-4	-3	-7	-15	-14	-29
	60% Pass-by Trips			<u>-1</u>	<u>-1</u>	<u>-2</u>	<u>-4</u>	<u>-4</u>	<u>-8</u>
	Net New Retail Trips			1	1	2	3	3	6
Net New Trips for Building 7 ~ 9									
	Net New Residential Trips			4	16	20	12	7	19
	Net New Office Trips			264	27	291	51	219	270
	Net New Retail Trips			1	1	2	3	3	6
Net Pass-BY Trips									
	Pass-By Trips			1	1	2	4	4	8



		AM Peak Hour			PM Peak Hour			Sat Peak Hour		
Land Use		IN	OUT	Total	IN	OUT	Total	IN	OUT	Total
Office	Single-Use Trips Gen. Est.	621	69	690	121	518	639	0	0	0
	Internal Trips	4	5	9	2	5	7	0	0	0
	External Trips	617	64	681	119	513	632	0	0	0
Retail	Single-Use Trips Gen. Est.	15	10	25	39	42	81	0	0	0
	Internal Trips	6	3	9	7	12	19	0	0	0
	External Trips	9	7	16	32	30	62	0	0	0
Restaurant	Single-Use Trips Gen. Est.	0	0	0	0	0	0	0	0	0
	Internal Trips	0	0	0	0	0	0	0	0	0
	External Trips	0	0	0	0	0	0	0	0	0
Cinema/ Entertainment	Single-Use Trips Gen. Est.	0	0	0	0	0	0	0	0	0
	Internal Trips	0	0	0	0	0	0	0	0	0
	External Trips	0	0	0	0	0	0	0	0	0
Residential	Single-Use Trips Gen. Est.	14	59	73	55	29	84	0	0	0
	Internal Trips	0	2	2	13	5	18	0	0	0
	External Trips	14	57	71	42	24	66	0	0	0
Hotel	Single-Use Trips Gen. Est.	0	0	0	0	0	0	0	0	0
	Internal Trips	0	0	0	0	0	0	0	0	0
	External Trips	0	0	0	0	0	0	0	0	0

	AM Peak Hour			AM Peak Hour			Sat Peak Hour		
	IN	OUT	Total	IN	OUT	Total	IN	OUT	Total
Single Use Trips Gen. Est.	650	138	788	215	589	804	0	0	0
External Trips	640	128	768	193	567	760	0	0	0
Internal Capture (%)	3%			5%					

**Internal trip capture rate sources: Trip Generation Handbook 3rd Edition, 2014.



EXHIBIT D-6
MULTI-USE TRIP GENERATION WORKSHEET
FOR BUILDING #7-9

Trip Generation

No.	Land Use	Size	AM Peak Hour			PM Peak Hour		
			In	Out	Total	In	Out	Total
Building No 10 - 11								
	Mid-Rise Apartments	185 Units	19	78	97	72	39	111
	Internal Trips Capture		0	-3	-3	-26	-10	-36
	30% TOD Credit Deduction		-6	-23	-29	-14	-9	-23
	59% Transit/Ped/Bike Deduction		<u>-8</u>	<u>-31</u>	<u>-39</u>	<u>-19</u>	<u>-12</u>	<u>-31</u>
	Net New Residential Trips		5	21	26	13	8	21
	Office	275,000 sq.ft.	495	55	550	96	413	509
	Internal Trips Capture		-8	-10	-18	-4	-9	-13
	30% TOD Credit Deduction		-146	-14	-160	-28	-121	-149
	39% Transit/Ped/Bike Deduction		<u>-133</u>	<u>-12</u>	<u>-145</u>	<u>-25</u>	<u>-110</u>	<u>-135</u>
	Net New Office Trips		208	19	227	39	173	212
	Retail	15,000 sq.ft.	30	19	49	81	87	168
	Internal Trips Capture		-11	-6	-17	-14	-25	-39
	30% TOD Credit Deduction		-6	-4	-10	-20	-19	-39
	69% Transit/Ped/Bike Deduction		-9	-6	-15	-32	-30	-62
	50% Pass-by Trips		<u>-2</u>	<u>-2</u>	<u>-4</u>	<u>-8</u>	<u>-7</u>	<u>-15</u>
	Net New Retail Trips		2	1	3	7	6	13
Net New Trips for Building 10 ~ 11								
	Net New Residential Trips		5	21	26	13	8	21
	Net New Office Trips		208	19	227	39	173	212
	Net New Retail Trips		2	1	3	7	6	13
Net Pass-BY Trips								
	Pass-By Trips		2	2	4	8	7	15



		AM Peak Hour			PM Peak Hour			Sat Peak Hour		
Land Use		IN	OUT	Total	IN	OUT	Total	IN	OUT	Total
Office	Single-Use Trips Gen. Est.	495	55	550	96	413	509	0	0	0
	Internal Trips	8	10	18	4	9	13	0	0	0
	External Trips	487	45	532	92	404	496	0	0	0
Retail	Single-Use Trips Gen. Est.	30	19	49	81	87	168	0	0	0
	Internal Trips	11	6	17	14	25	39	0	0	0
	External Trips	19	13	32	67	62	129	0	0	0
Restaurant	Single-Use Trips Gen. Est.	0	0	0	0	0	0	0	0	0
	Internal Trips	0	0	0	0	0	0	0	0	0
	External Trips	0	0	0	0	0	0	0	0	0
Cinema/ Entertainment	Single-Use Trips Gen. Est.	0	0	0	0	0	0	0	0	0
	Internal Trips	0	0	0	0	0	0	0	0	0
	External Trips	0	0	0	0	0	0	0	0	0
Residential	Single-Use Trips Gen. Est.	19	78	97	72	39	111	0	0	0
	Internal Trips	0	3	3	26	10	36	0	0	0
	External Trips	19	75	94	46	29	75	0	0	0
Hotel	Single-Use Trips Gen. Est.	0	0	0	0	0	0	0	0	0
	Internal Trips	0	0	0	0	0	0	0	0	0
	External Trips	0	0	0	0	0	0	0	0	0


	AM Peak Hour			AM Peak Hour			Sat Peak Hour		
	IN	OUT	Total	IN	OUT	Total	IN	OUT	Total
Single Use Trips Gen. Est.	544	152	696	249	539	788	0	0	0
External Trips	525	133	658	205	495	700	0	0	0
Internal Capture (%)	5%			11%					

**Internal trip capture rate sources: Trip Generation Handbook 3rd Edition, 2014.



EXHIBIT D-8


MULTI-USE TRIP GENERATION WORKSHEET FOR BUILDING #10-11

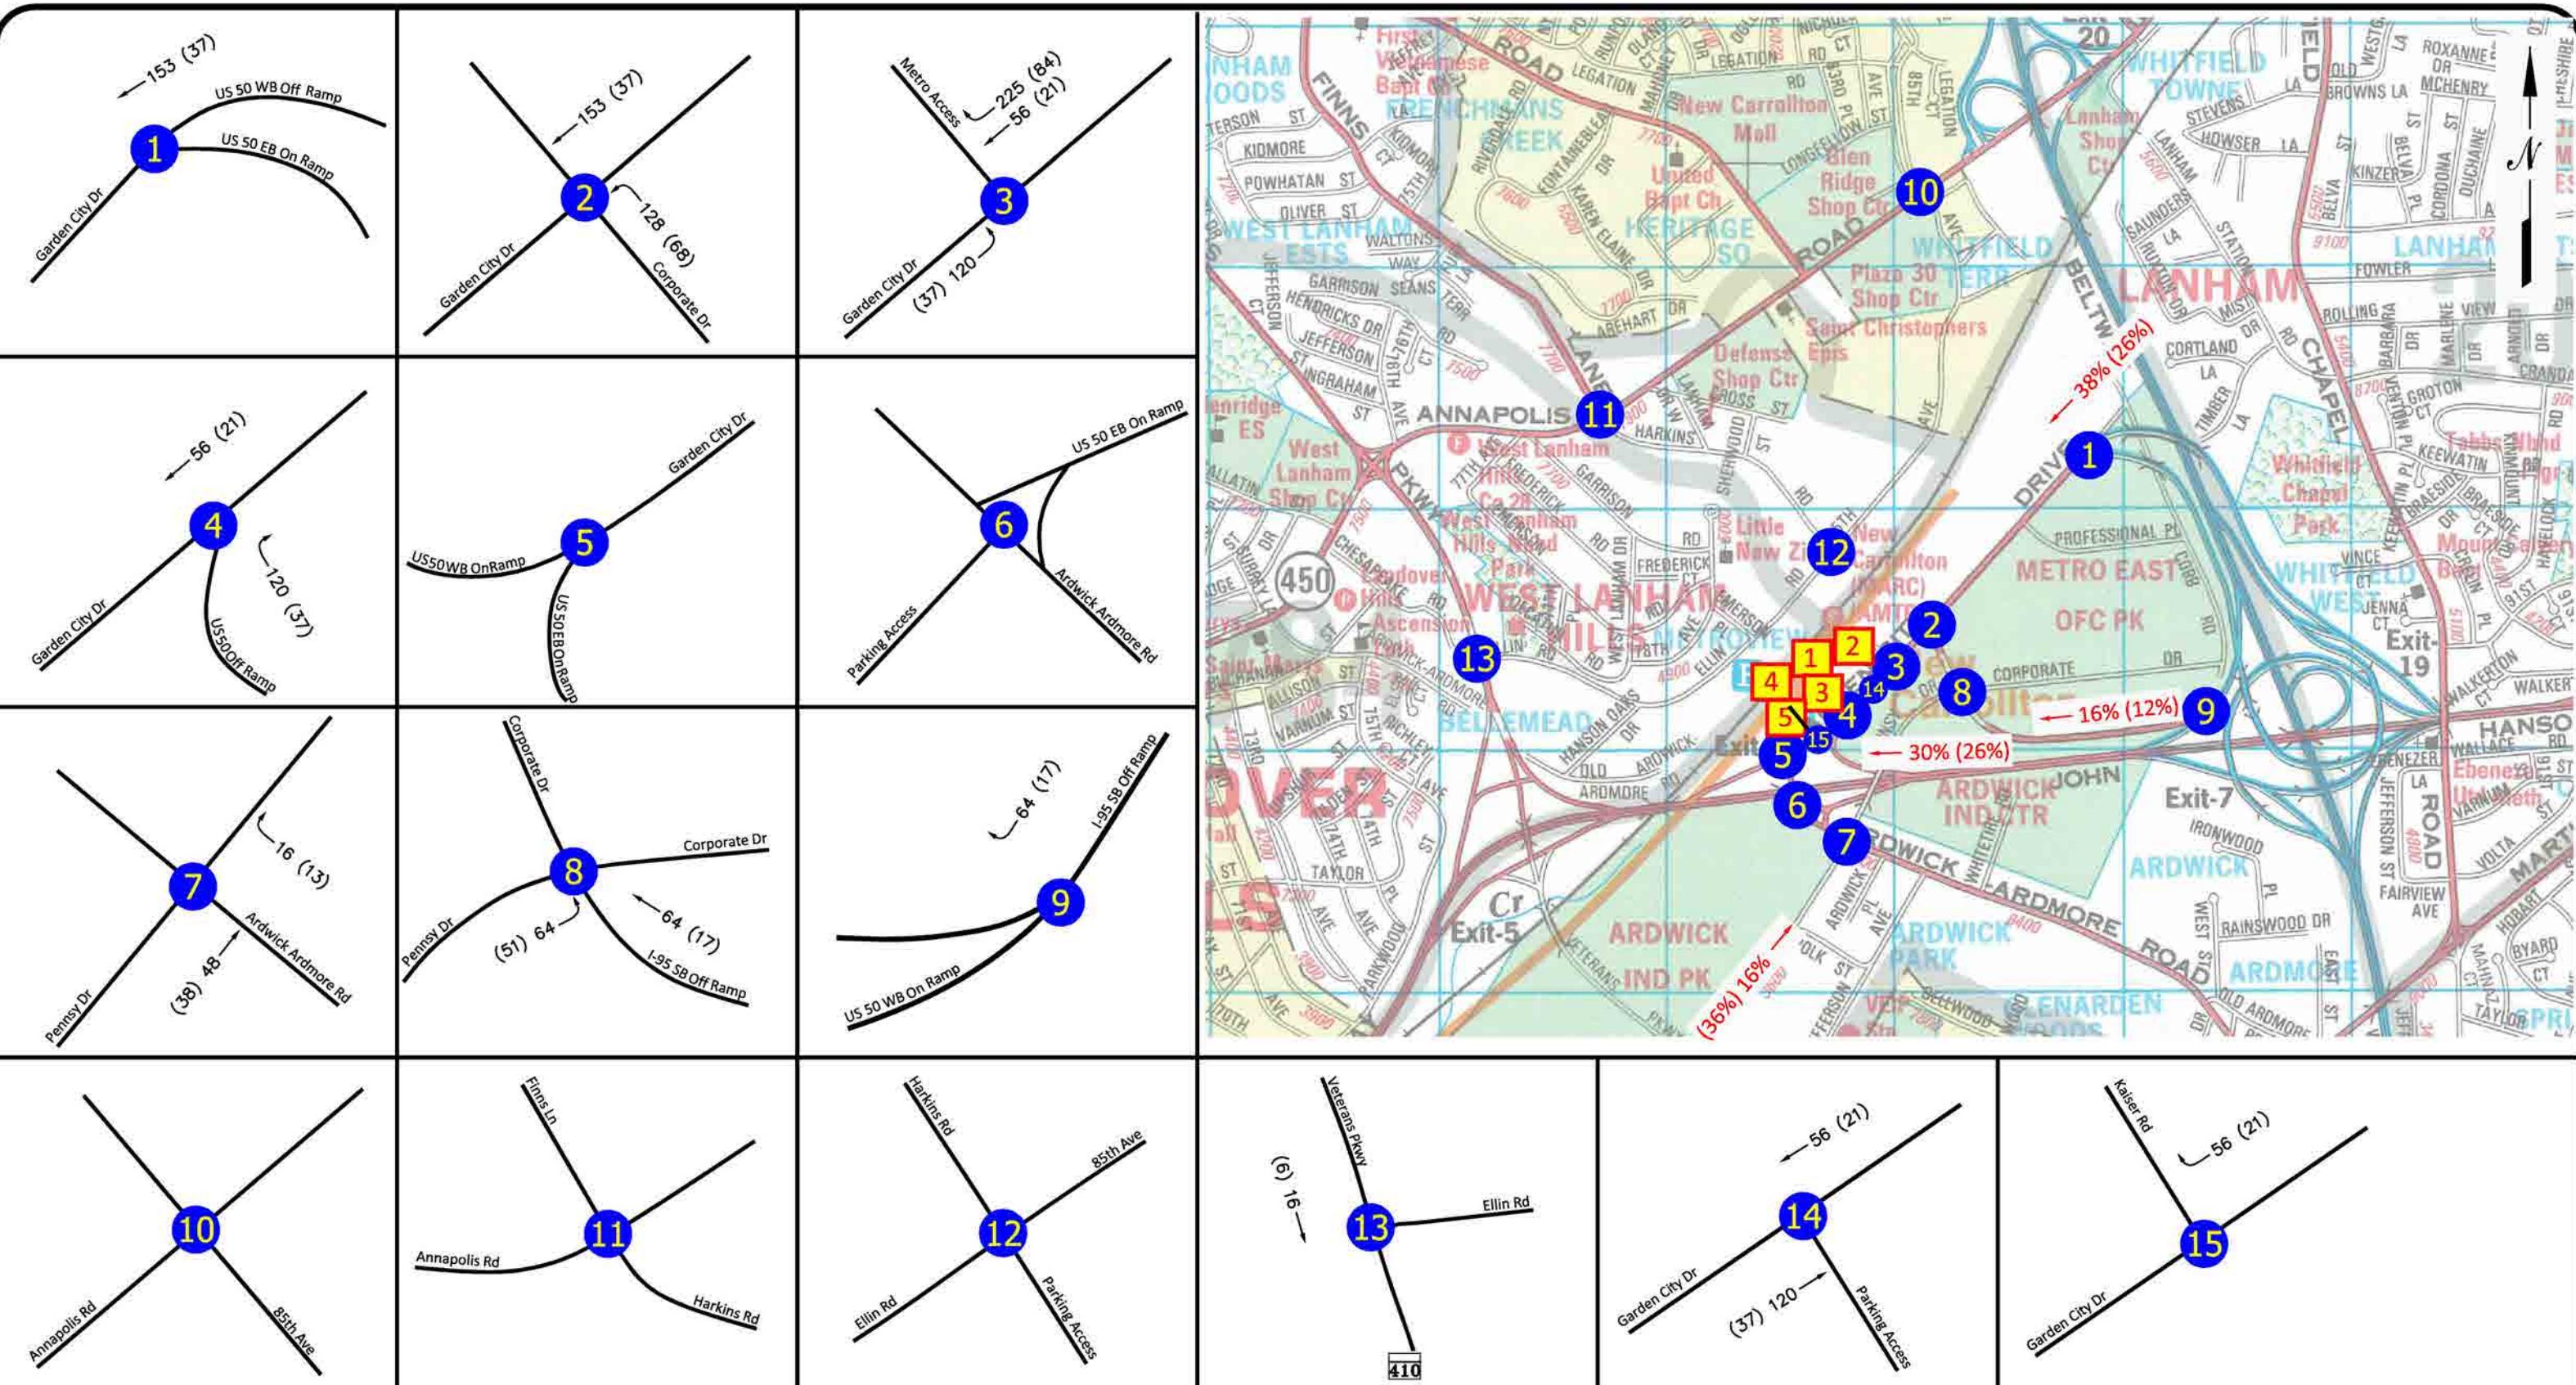

NOT TO SCALE
00 - MORNING PEAK HOUR
(00) - EVENING PEAK HOUR

Build#1~#5
In: 401 (142)


EXHIBIT D-9 SITE TRIP ASSIGNMENT FOR BUILDING #1 ~ #5 INBOUND TRIPS

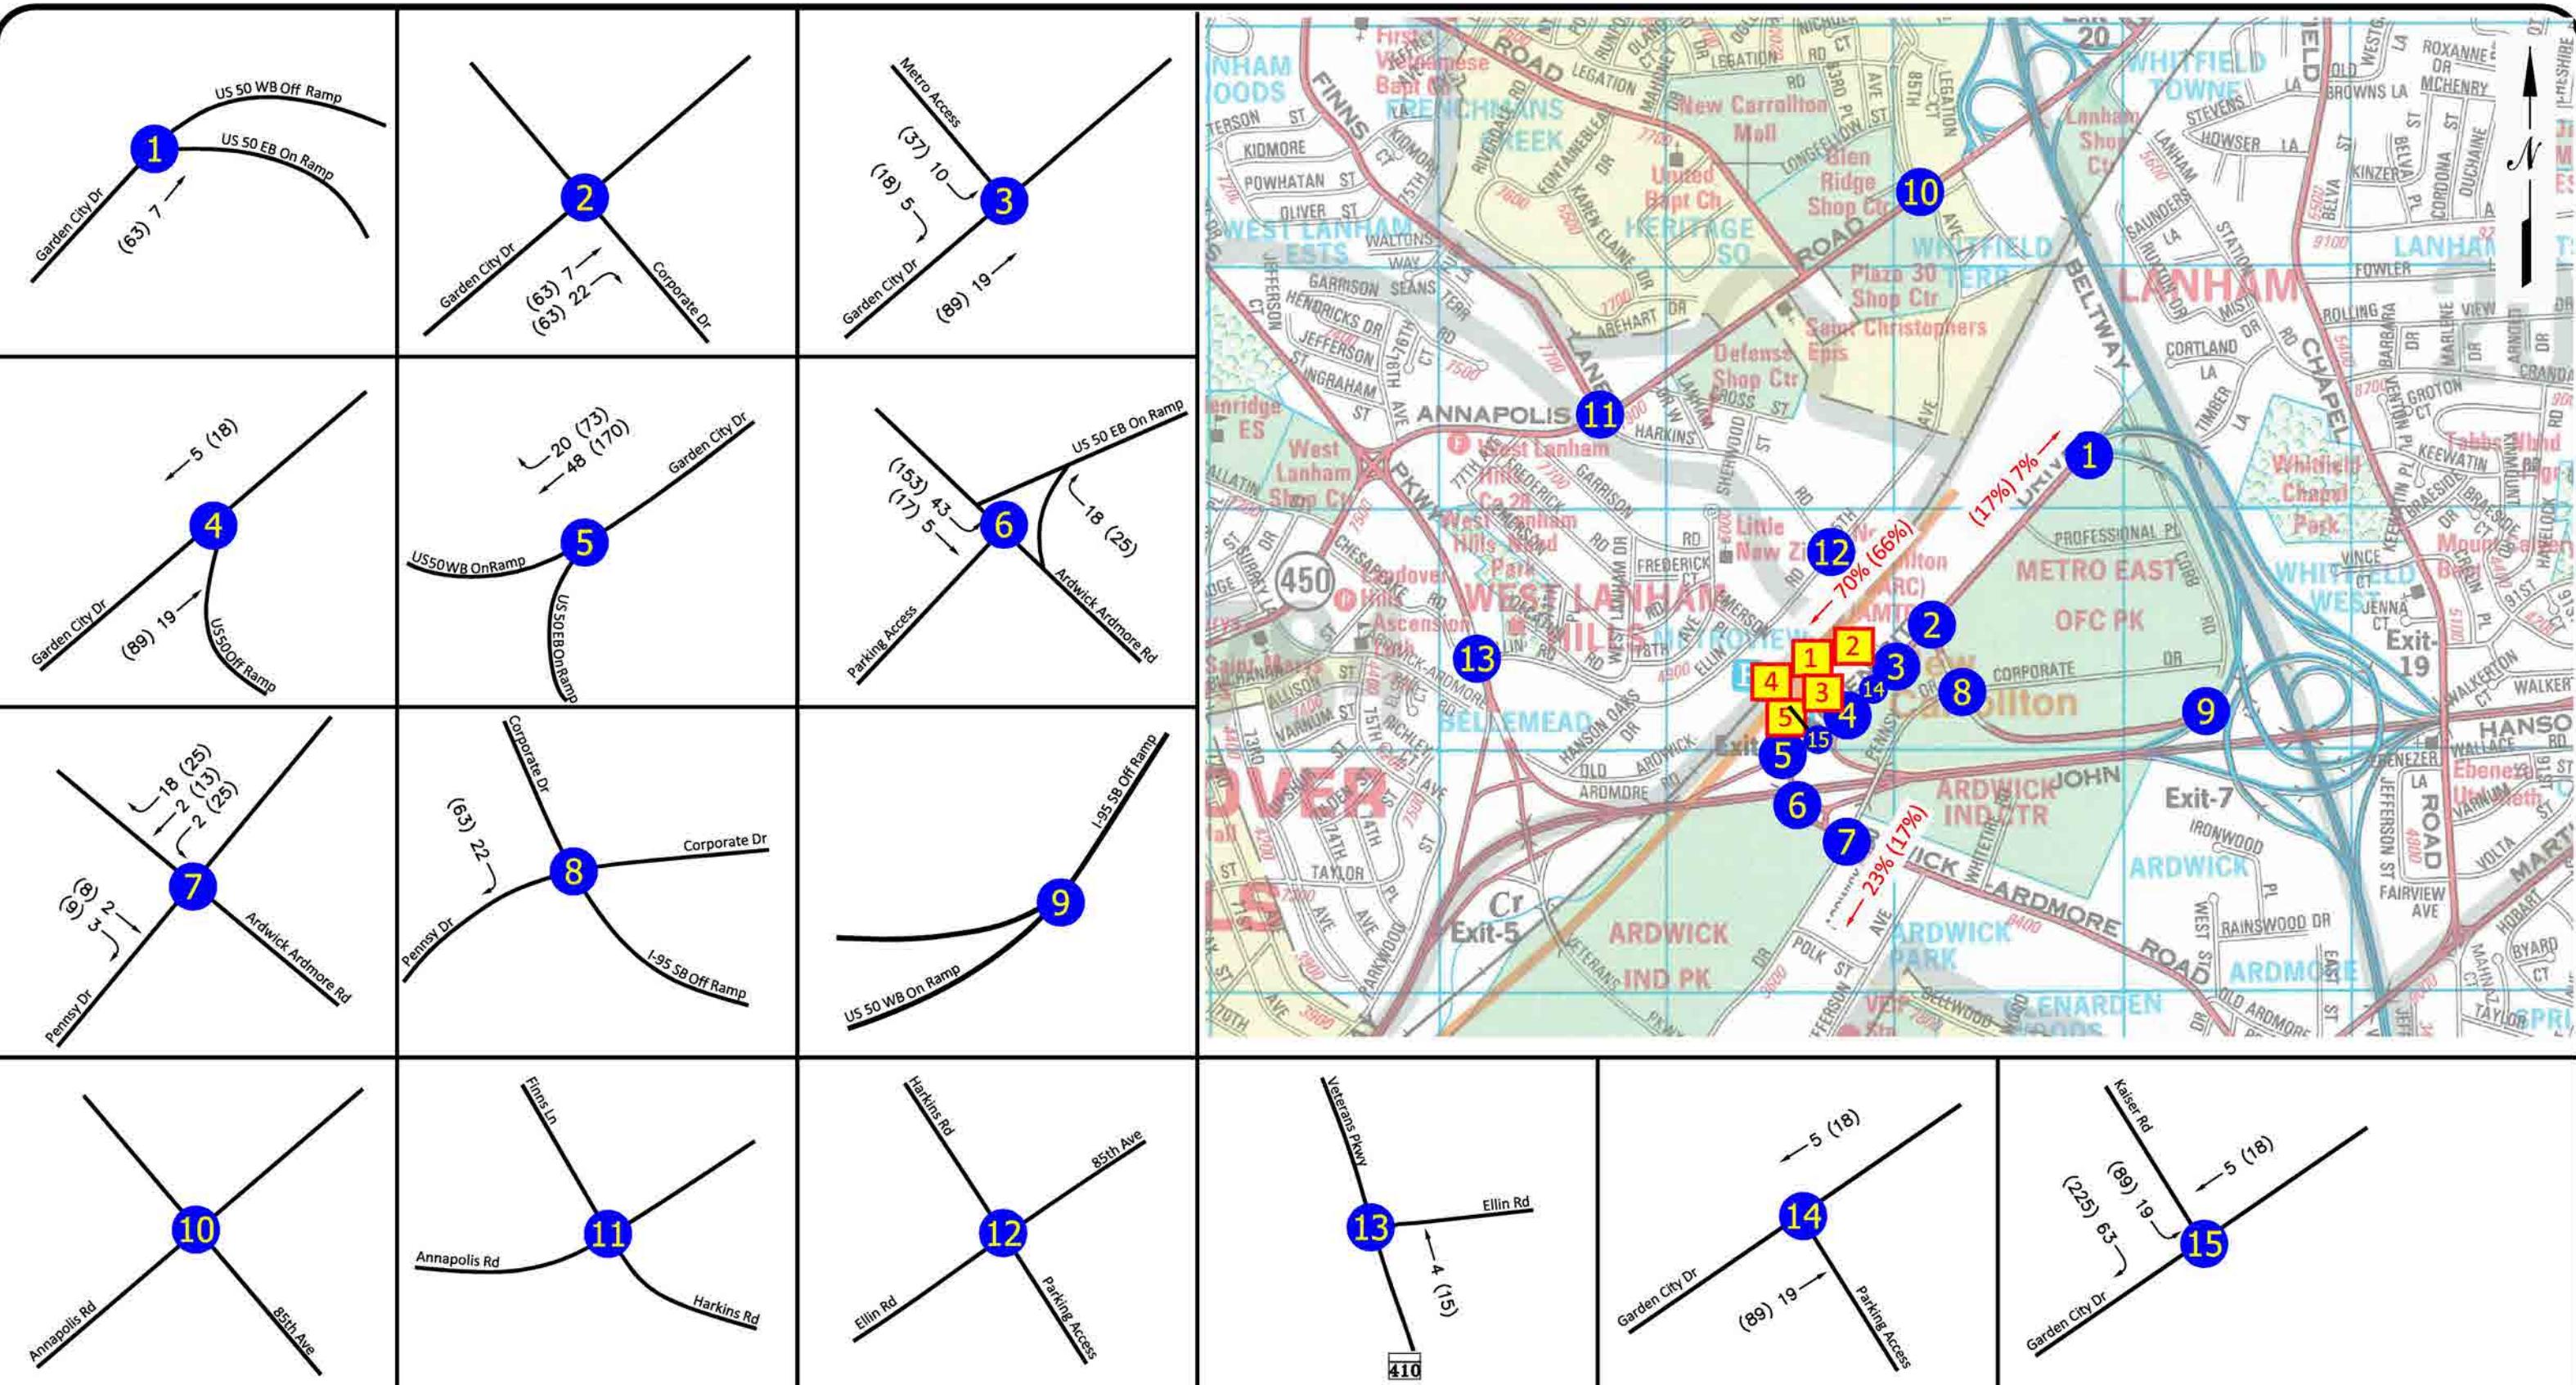

NOT TO SCALE
00 - MORNING PEAK HOUR
(00) - EVENING PEAK HOUR

Build#1~#5
Out: 97 (369)


EXHIBIT D-10
TRIP ASSIGNMENT FOR
BUILDING #1 ~ #5 OUTBOUND TRIPS

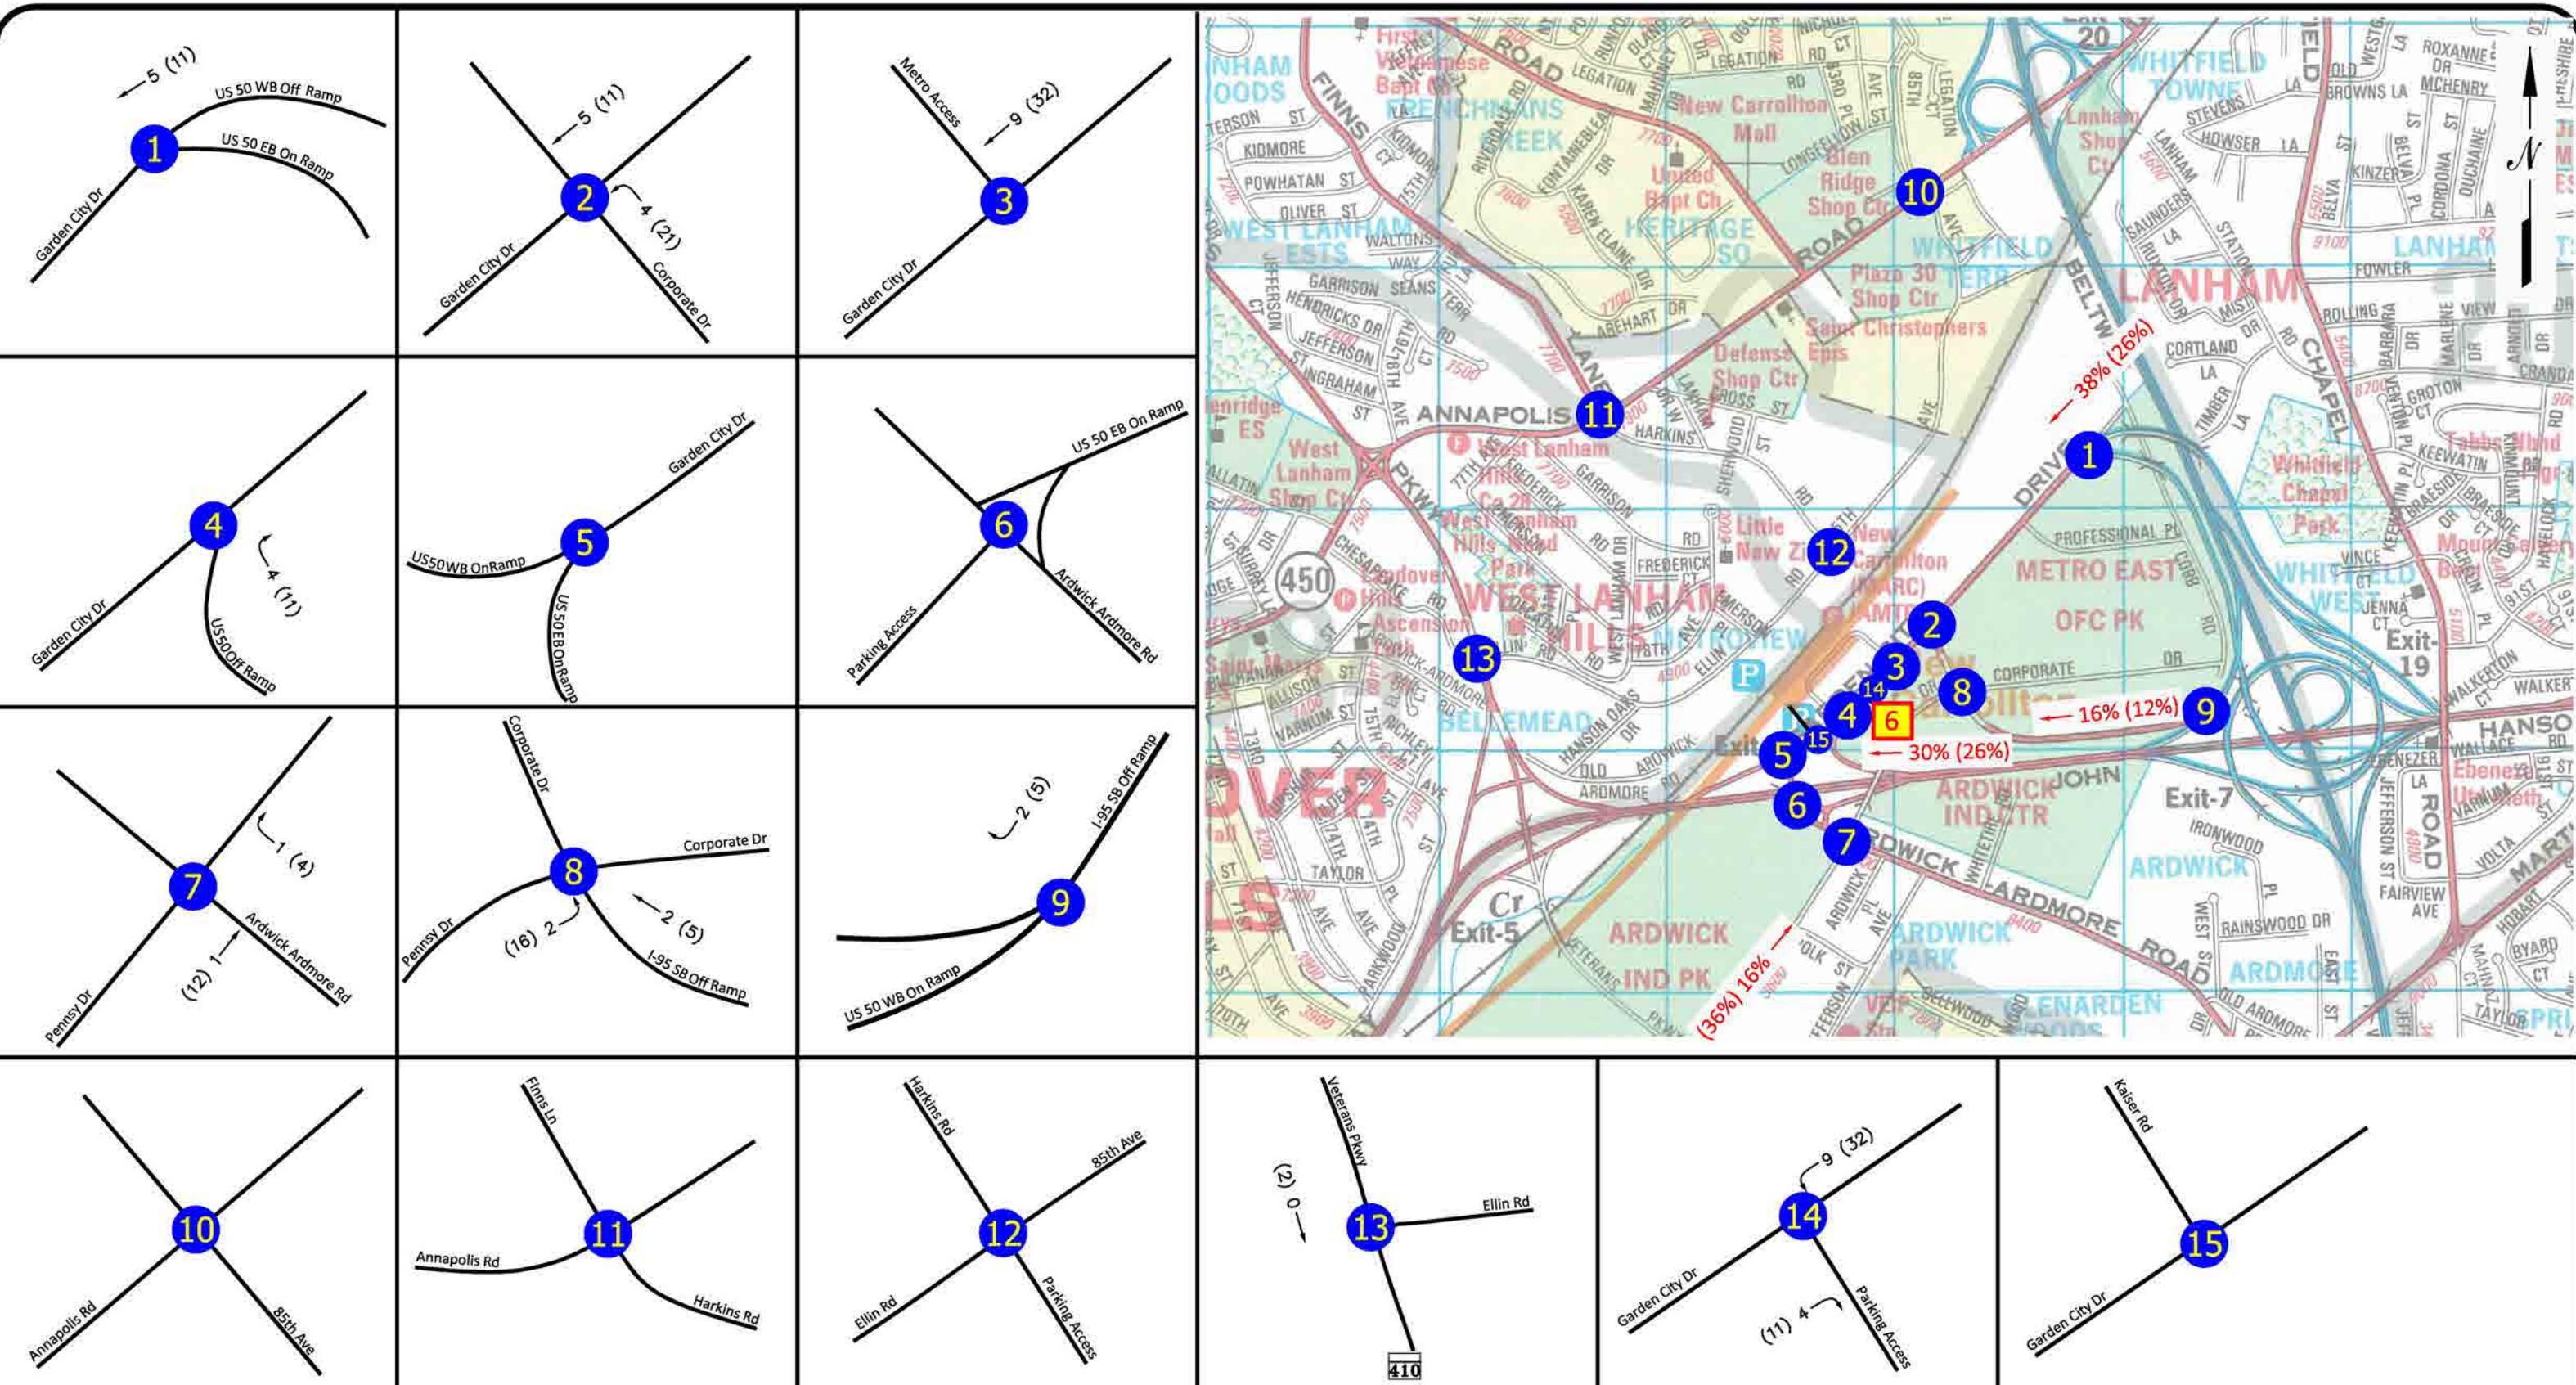

NOT TO SCALE
00 - MORNING PEAK HOUR
(00) - EVENING PEAK HOUR

In: 13 (43)


EXHIBIT D-11
TRIP ASSIGNMENT FOR
BUILDING #6 INBOUND TRIPS

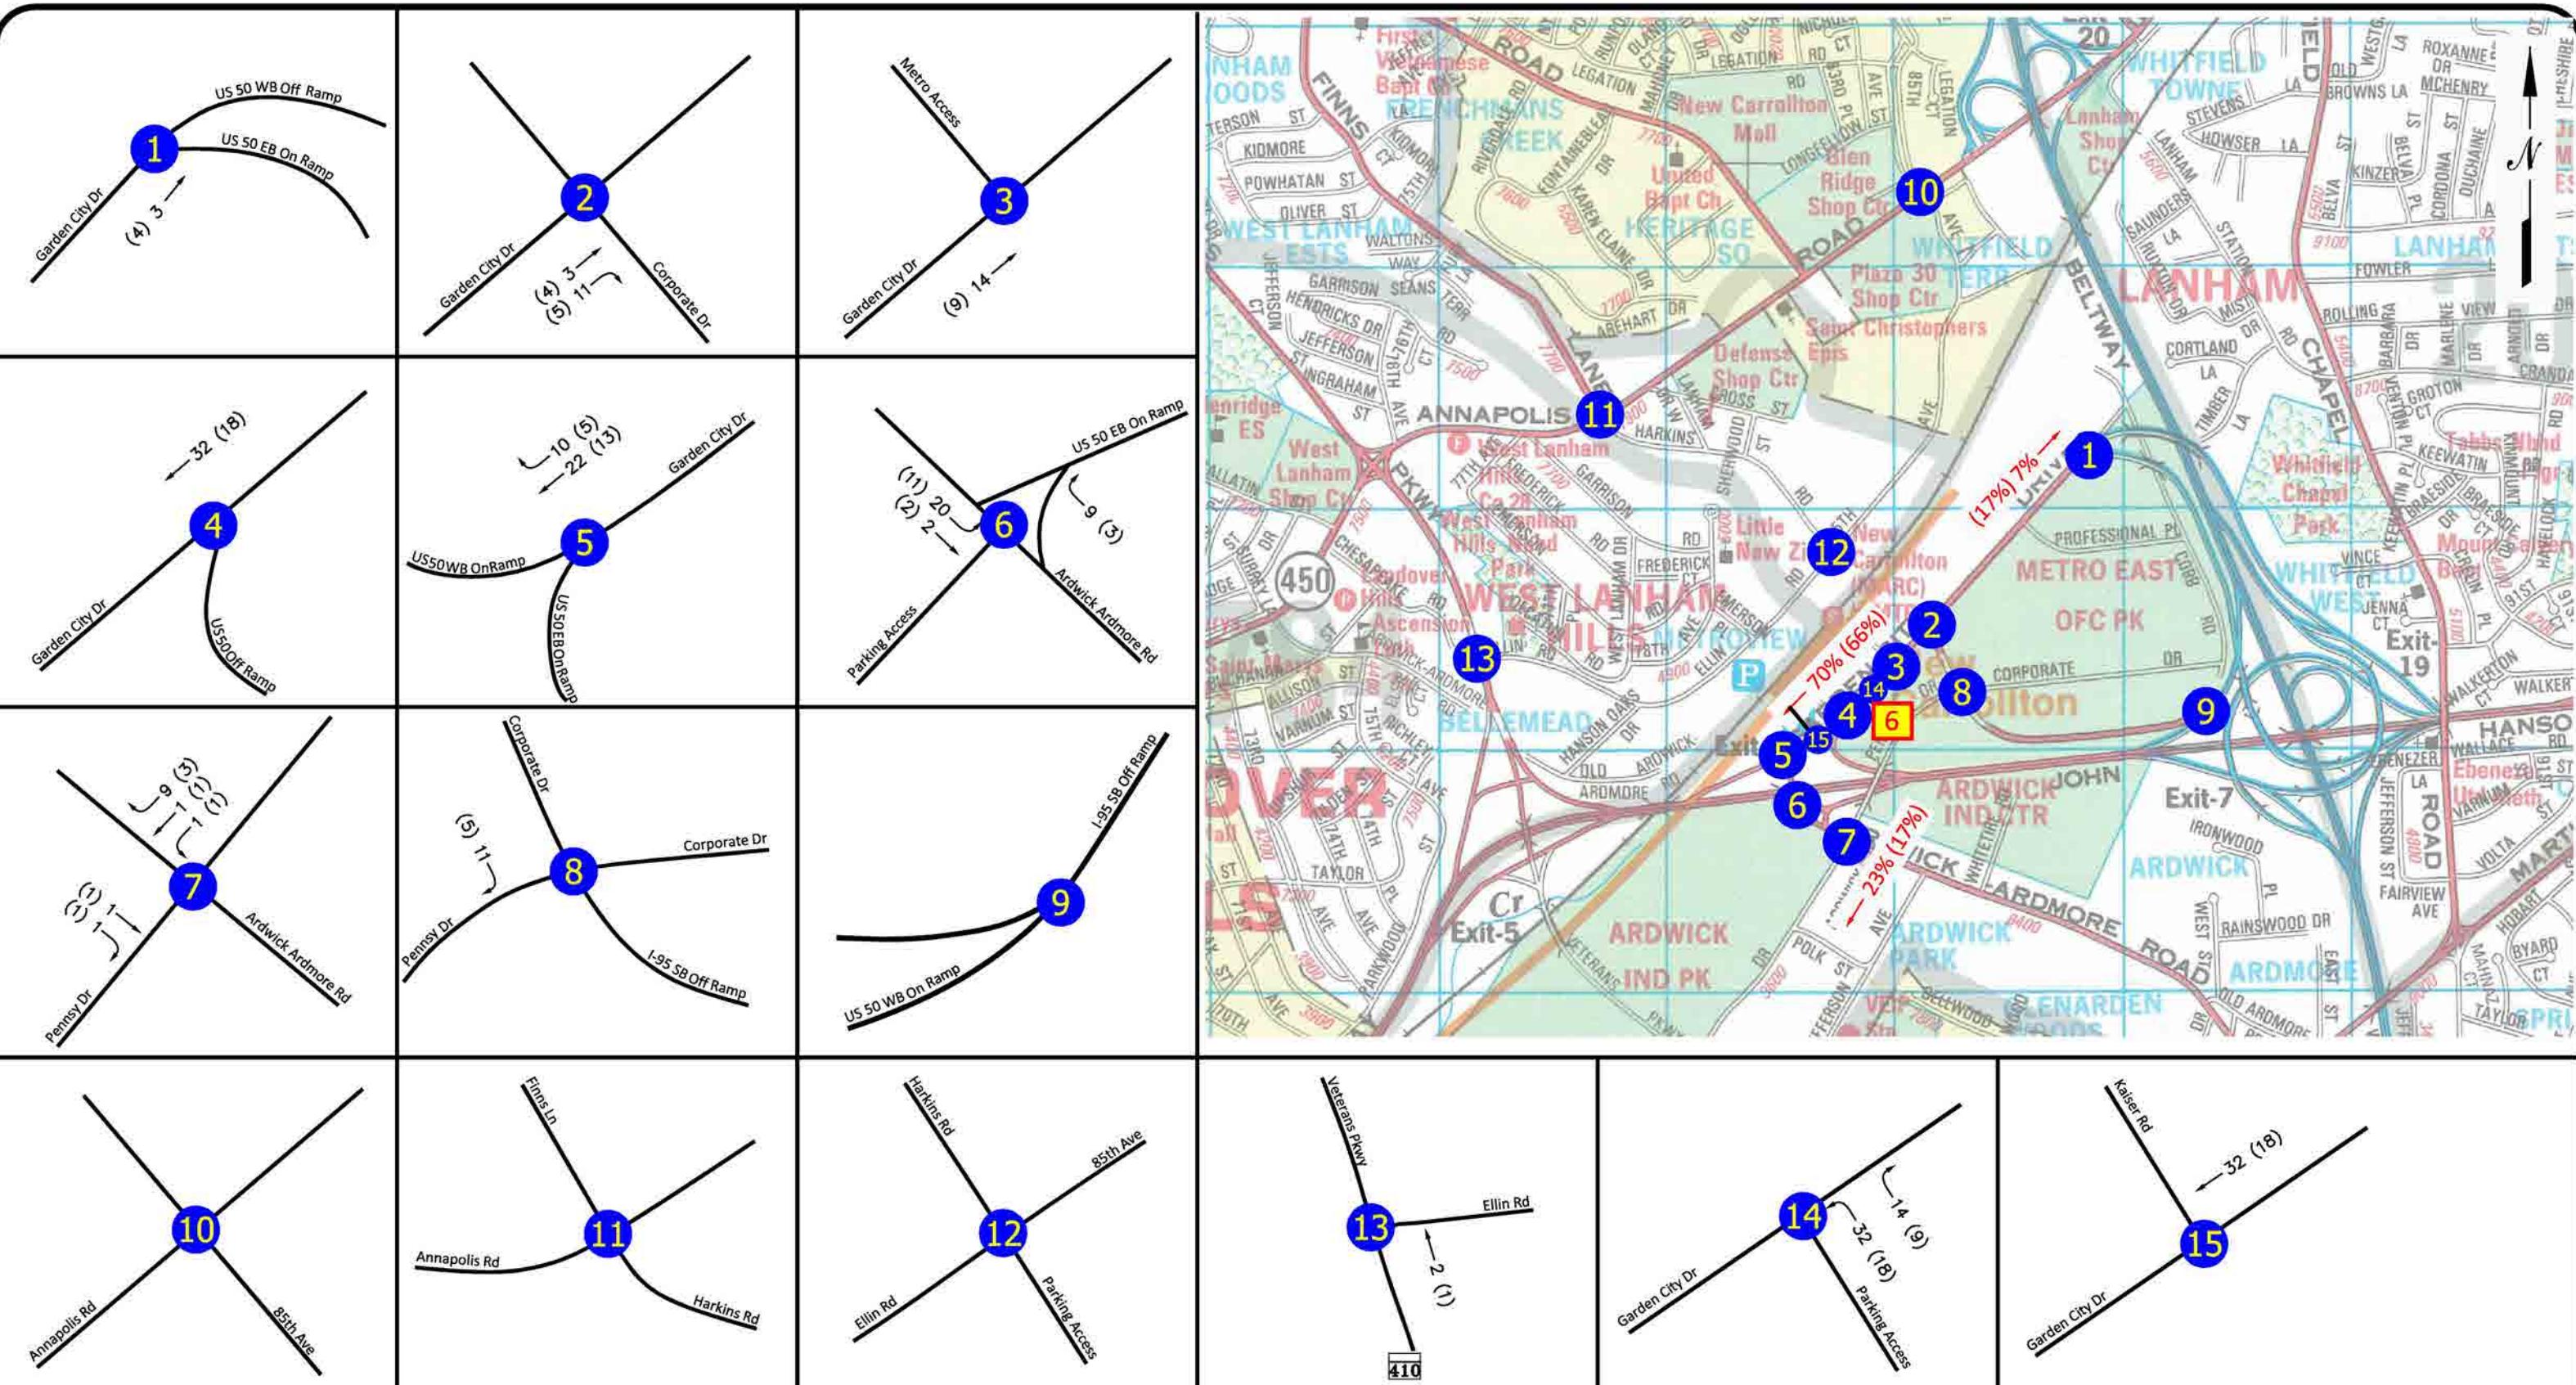

NOT TO SCALE
 00 - MORNING PEAK HOUR
 (00) - EVENING PEAK HOUR

Out: 46 (27)

EXHIBIT D-12
TRIP ASSIGNMENT FOR
BUILDING #6 OUTBOUND TRIPS

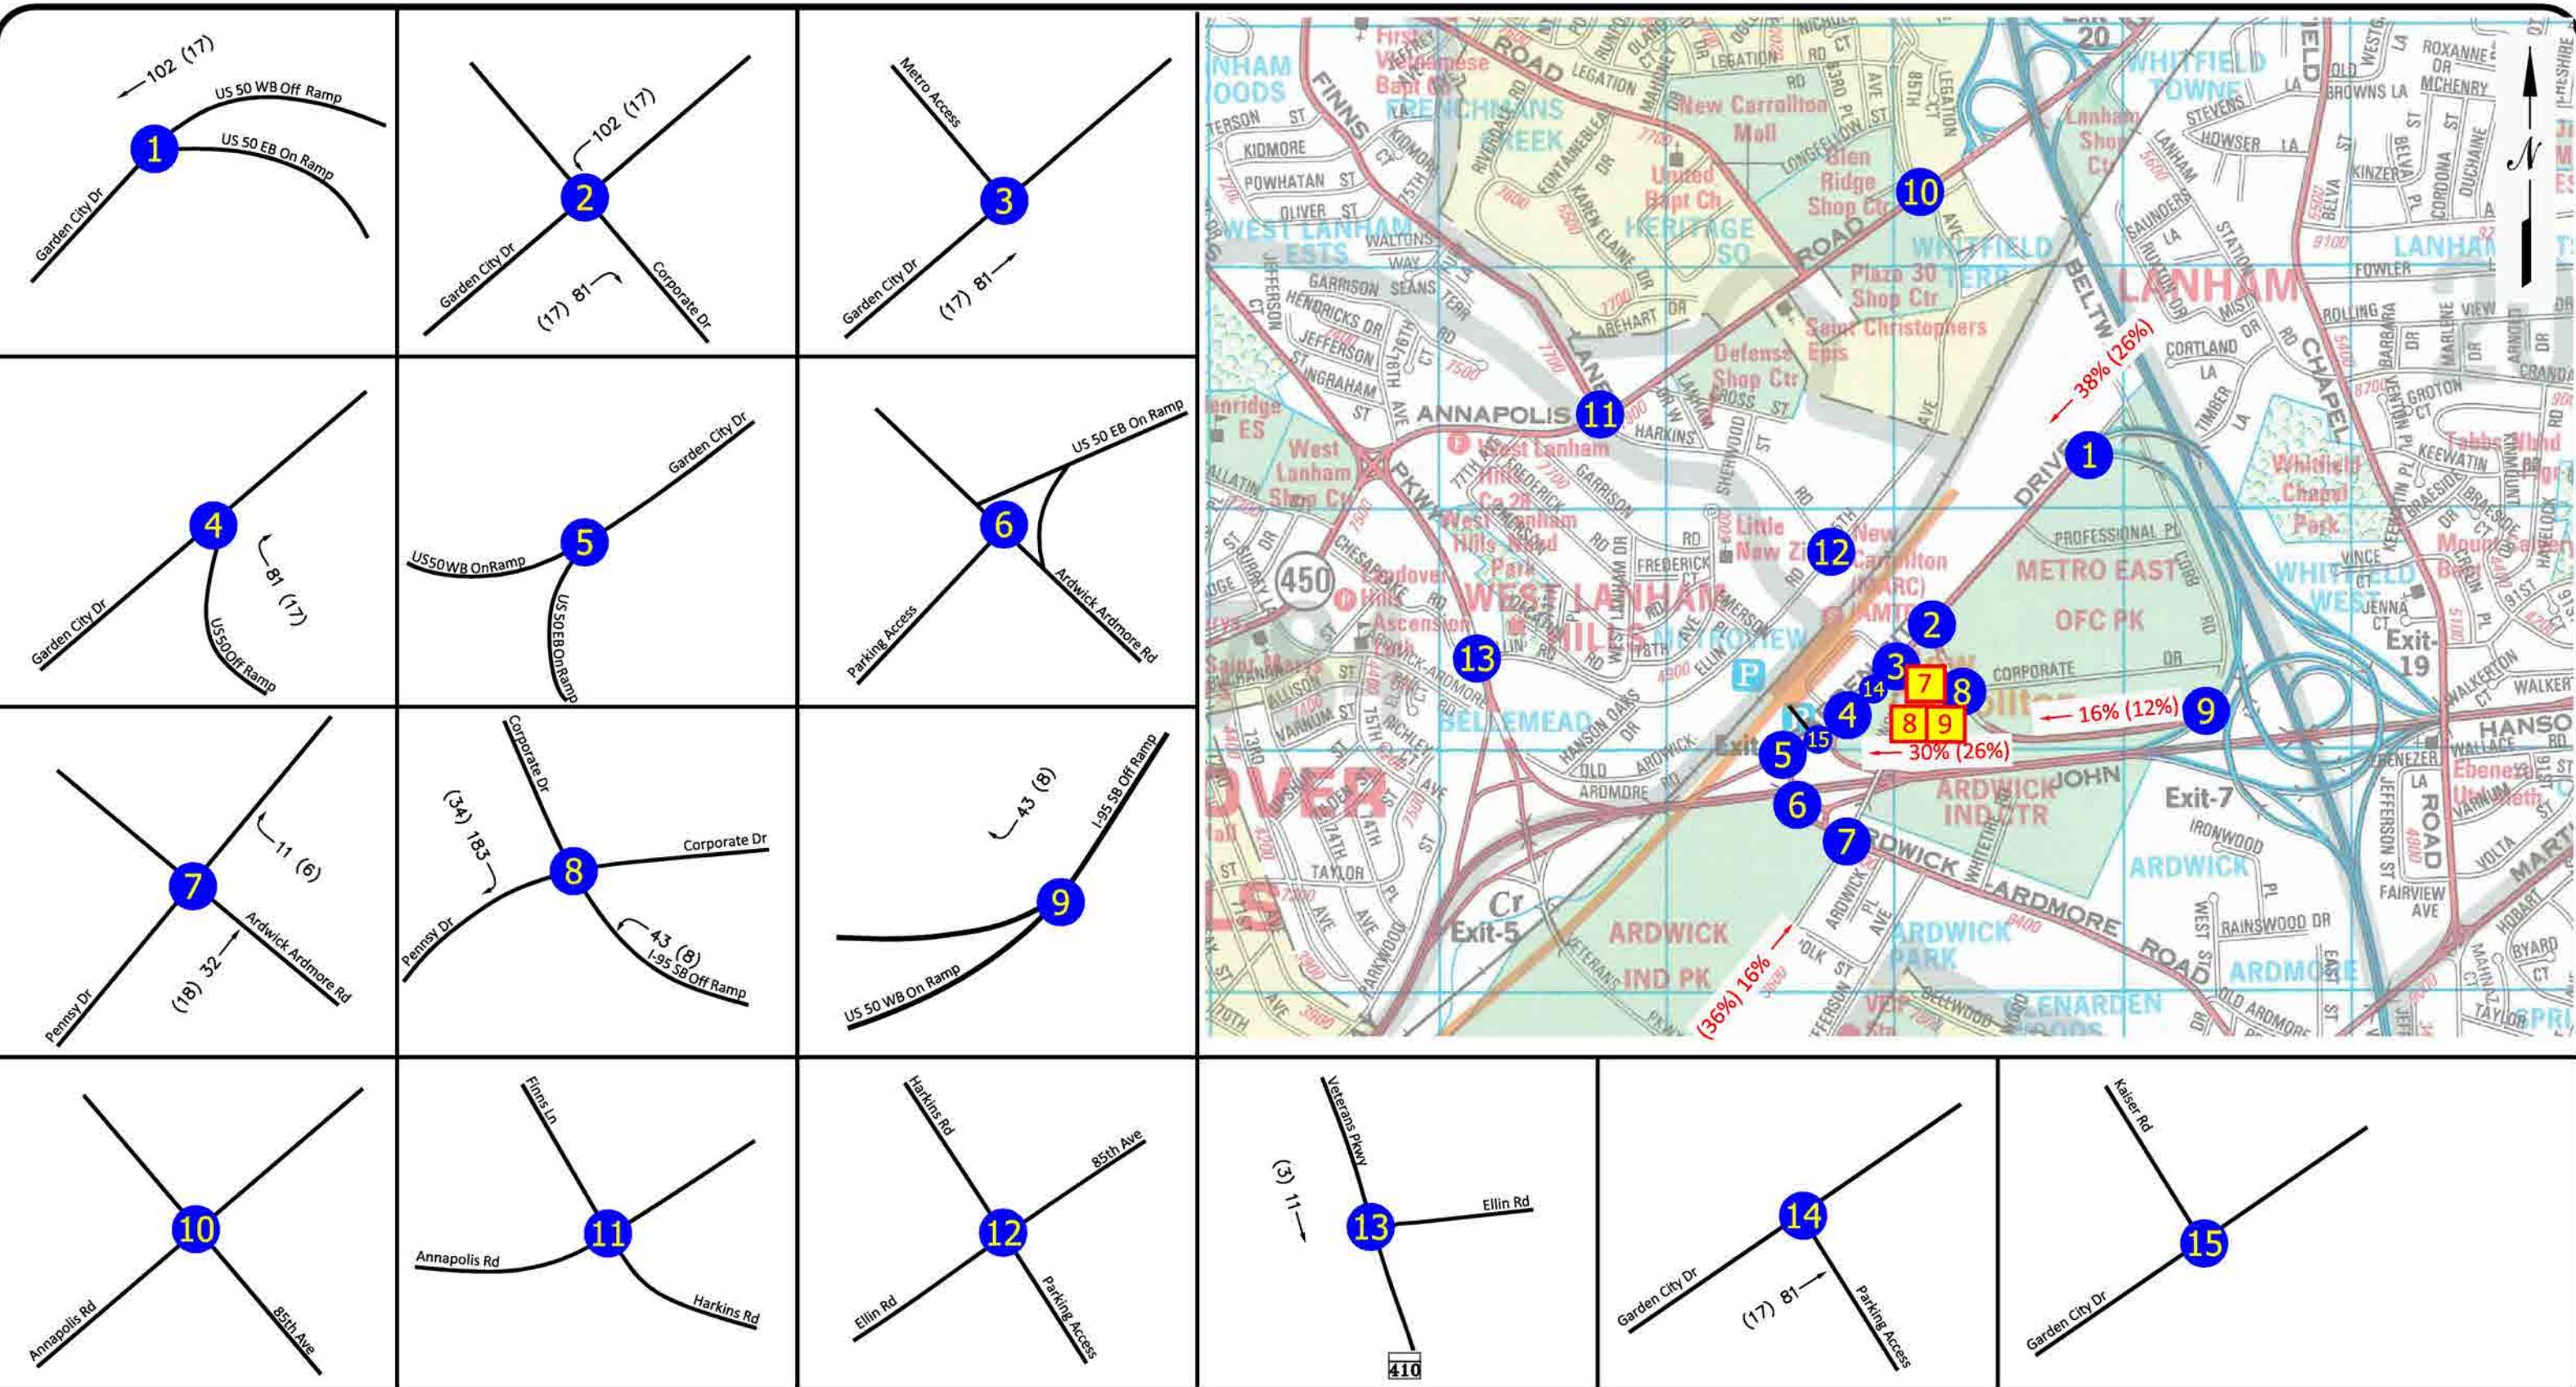


NOT TO SCALE
00 - MORNING PEAK HOUR
(00) - EVENING PEAK HOUR

In: 269 (66)

EXHIBIT D-13


TRIP ASSIGNMENT FOR BUILDINGS #7, #8 & #9 (INBOUND TRIPS)

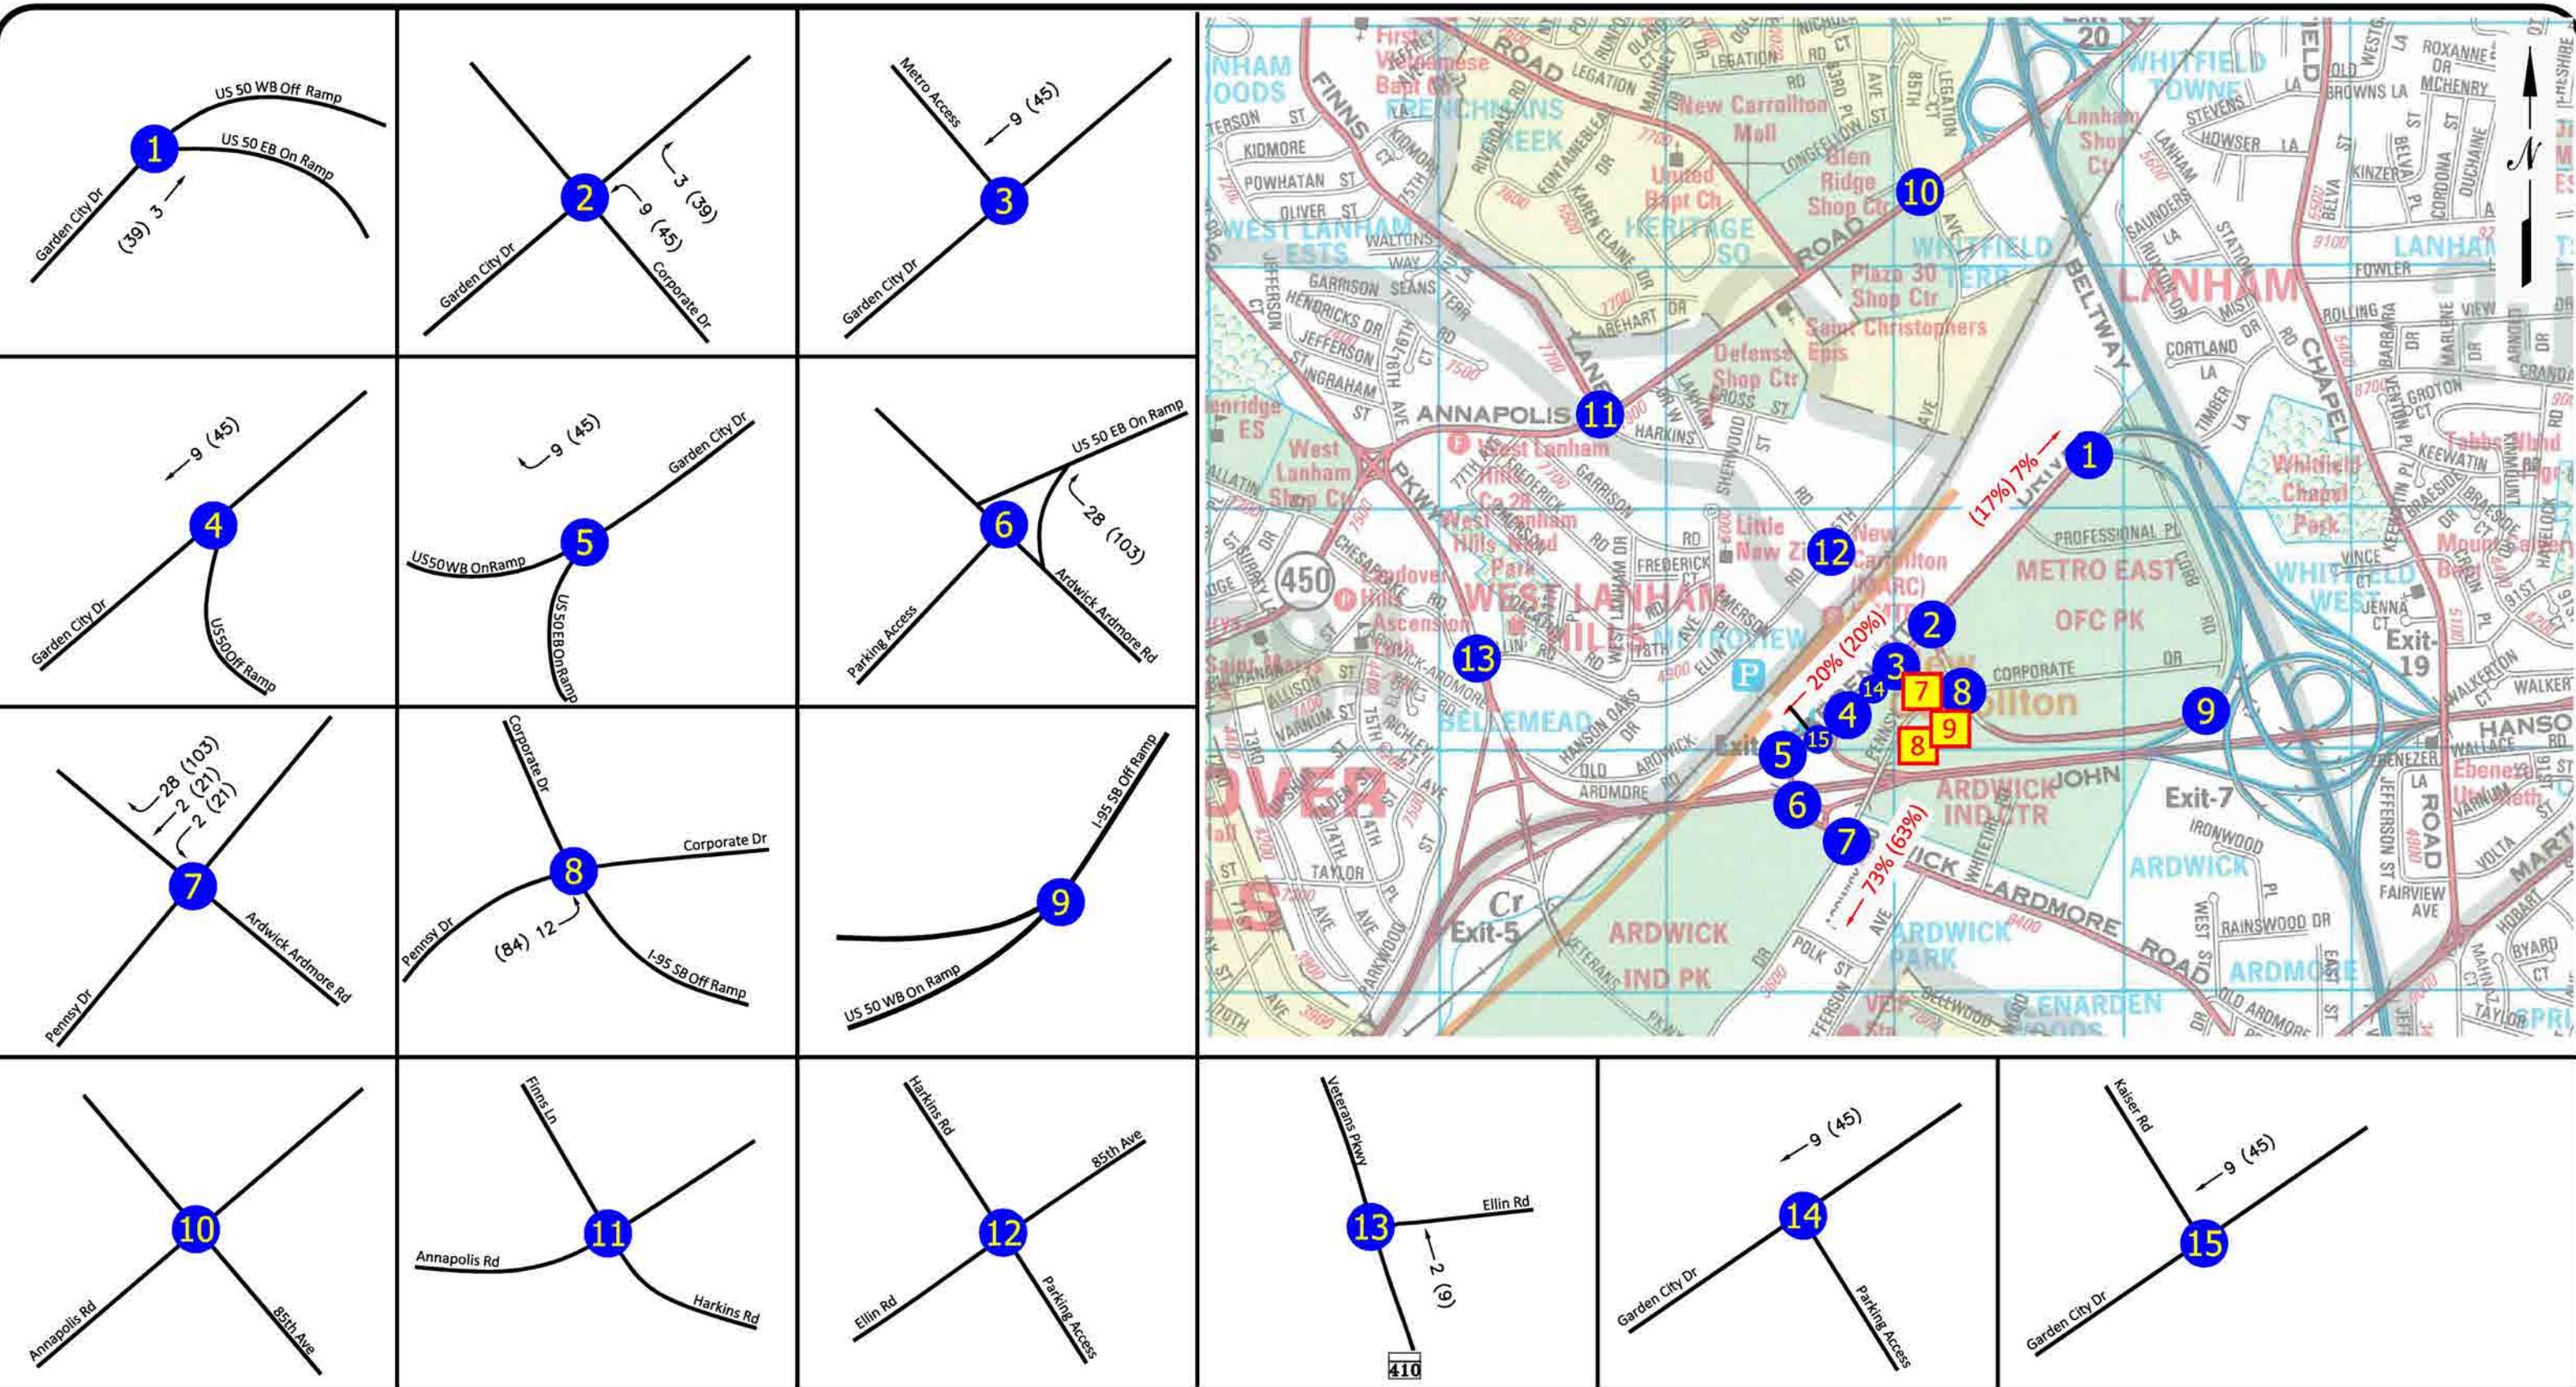

NOT TO SCALE
00 - MORNING PEAK HOUR
(00) - EVENING PEAK HOUR

Out: 44 (229)


EXHIBIT D-14
TRIP ASSIGNMENT FOR
BUILDINGS #7, #8 & #9 OUTBOUND TRIPS

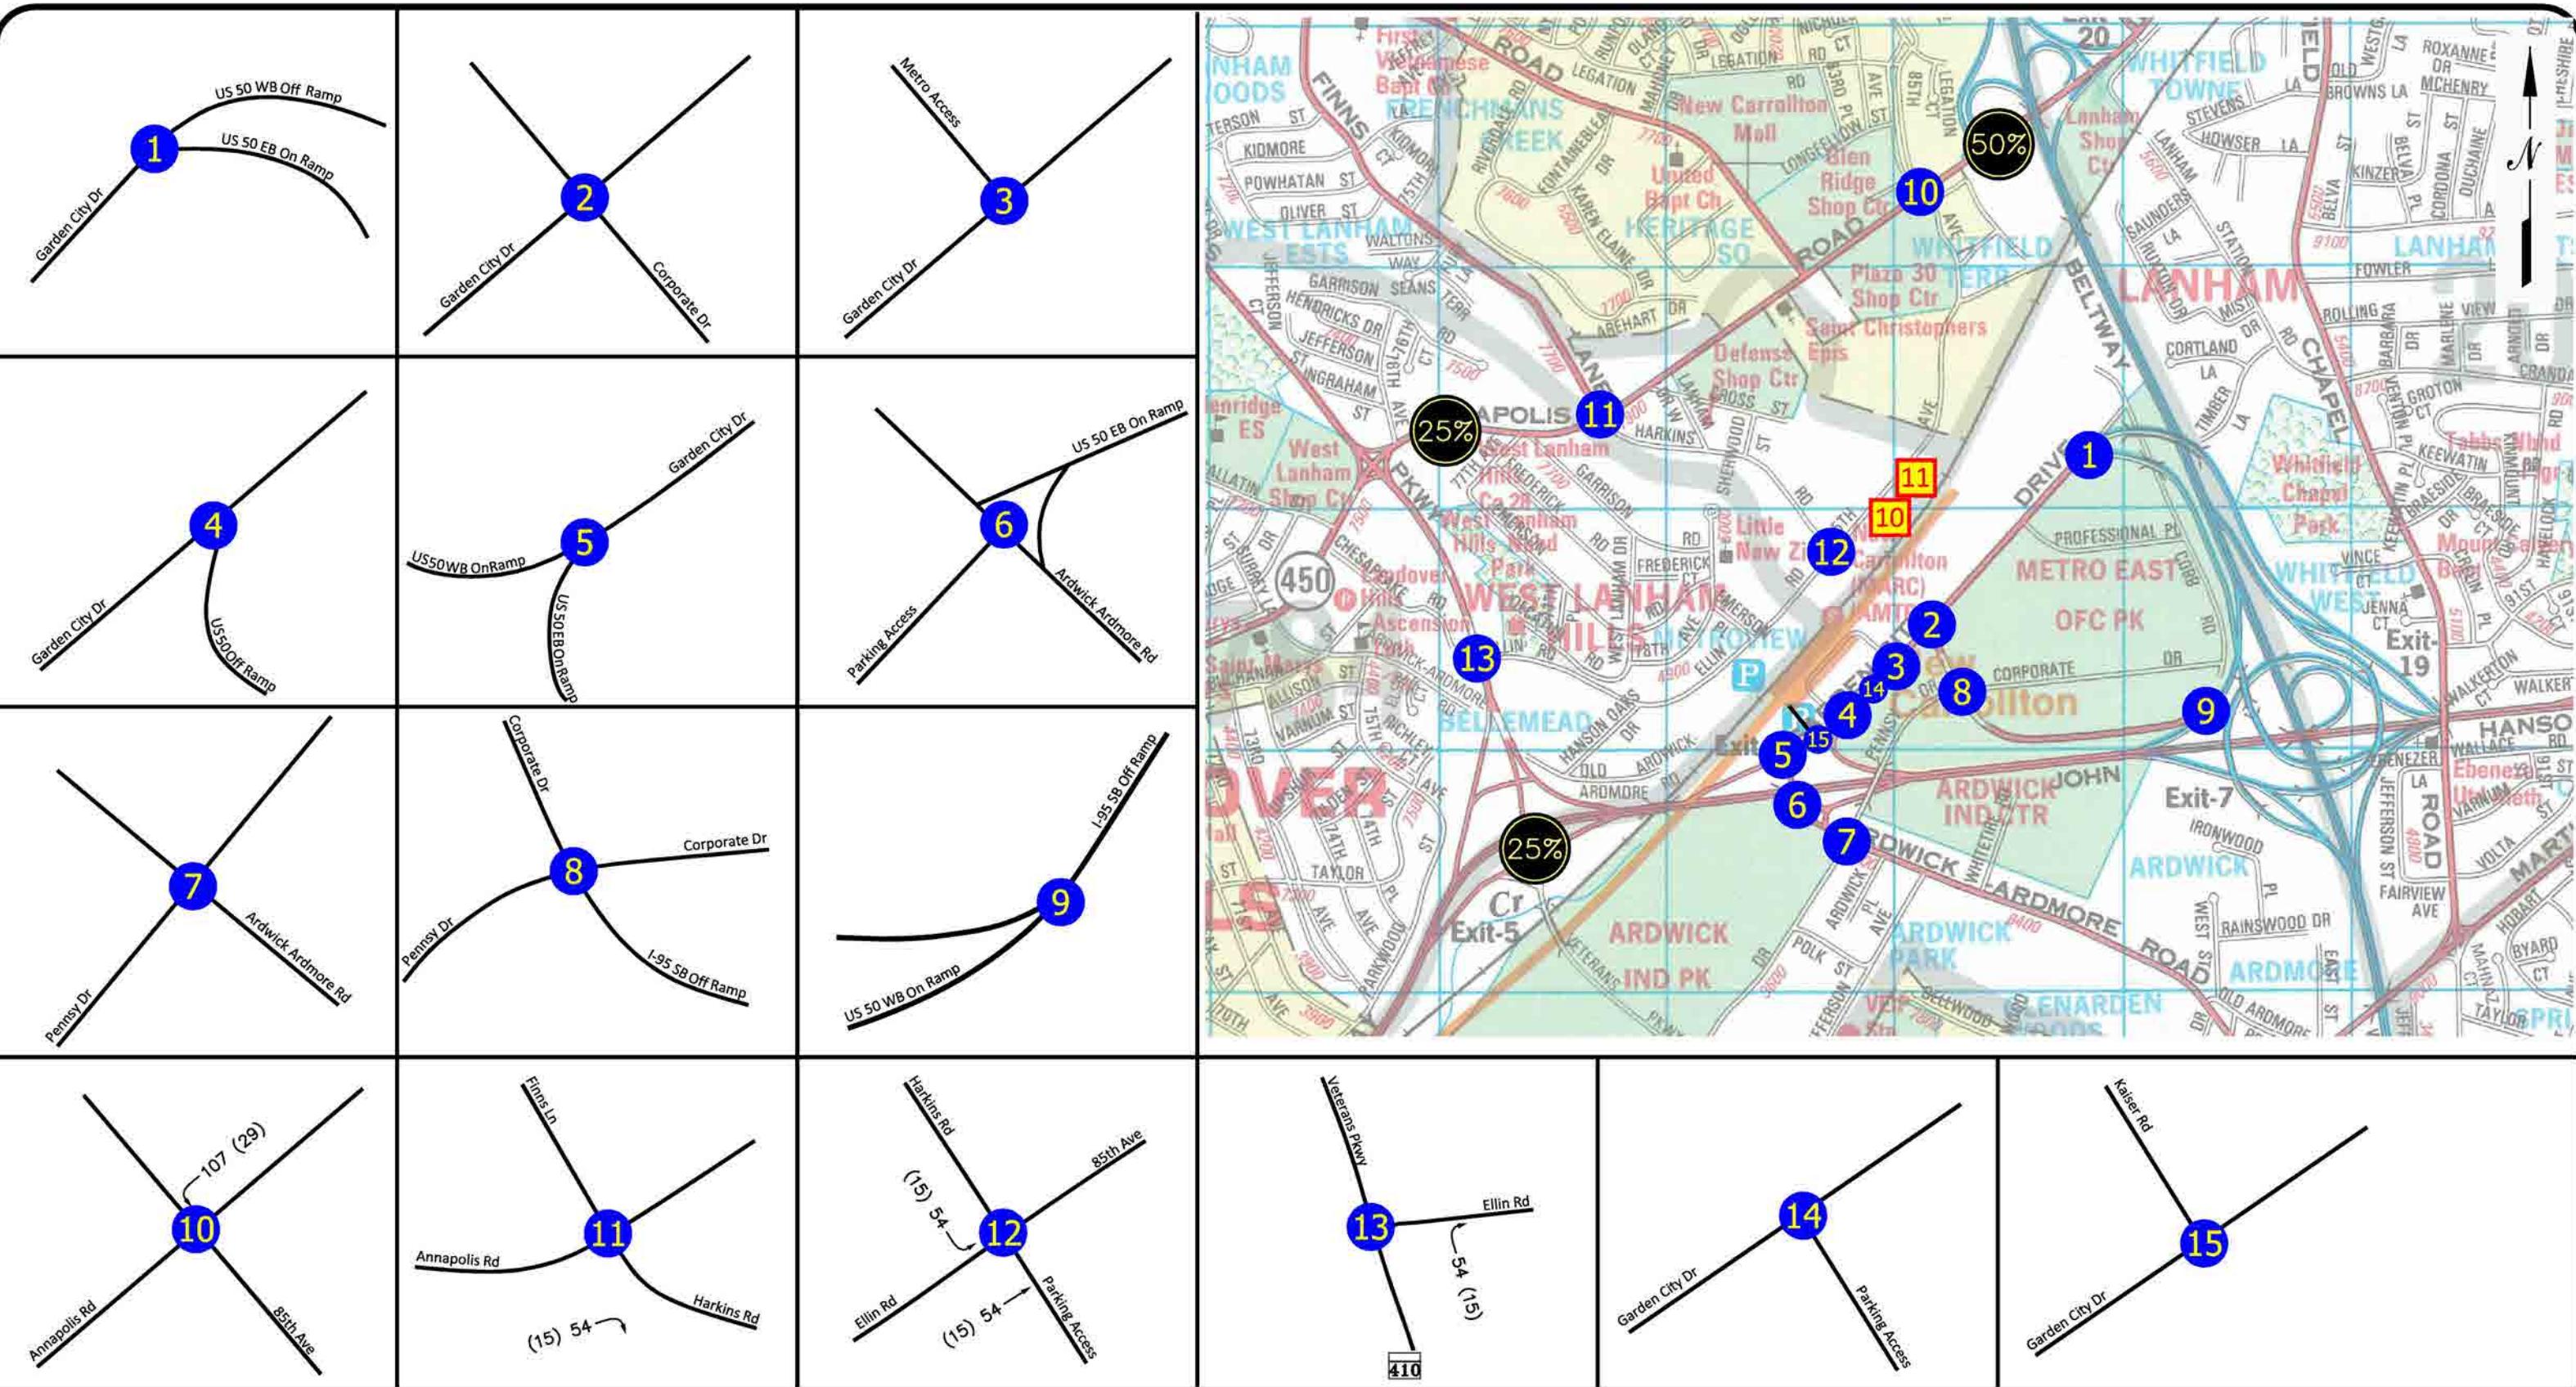

NOT TO SCALE
 00 - MORNING PEAK HOUR
 (00) - EVENING PEAK HOUR

In: 215 (59)


EXHIBIT D-15
TRIP ASSIGNMENT FOR
BUILDINGS #10 & #11 INBOUND TRIPS

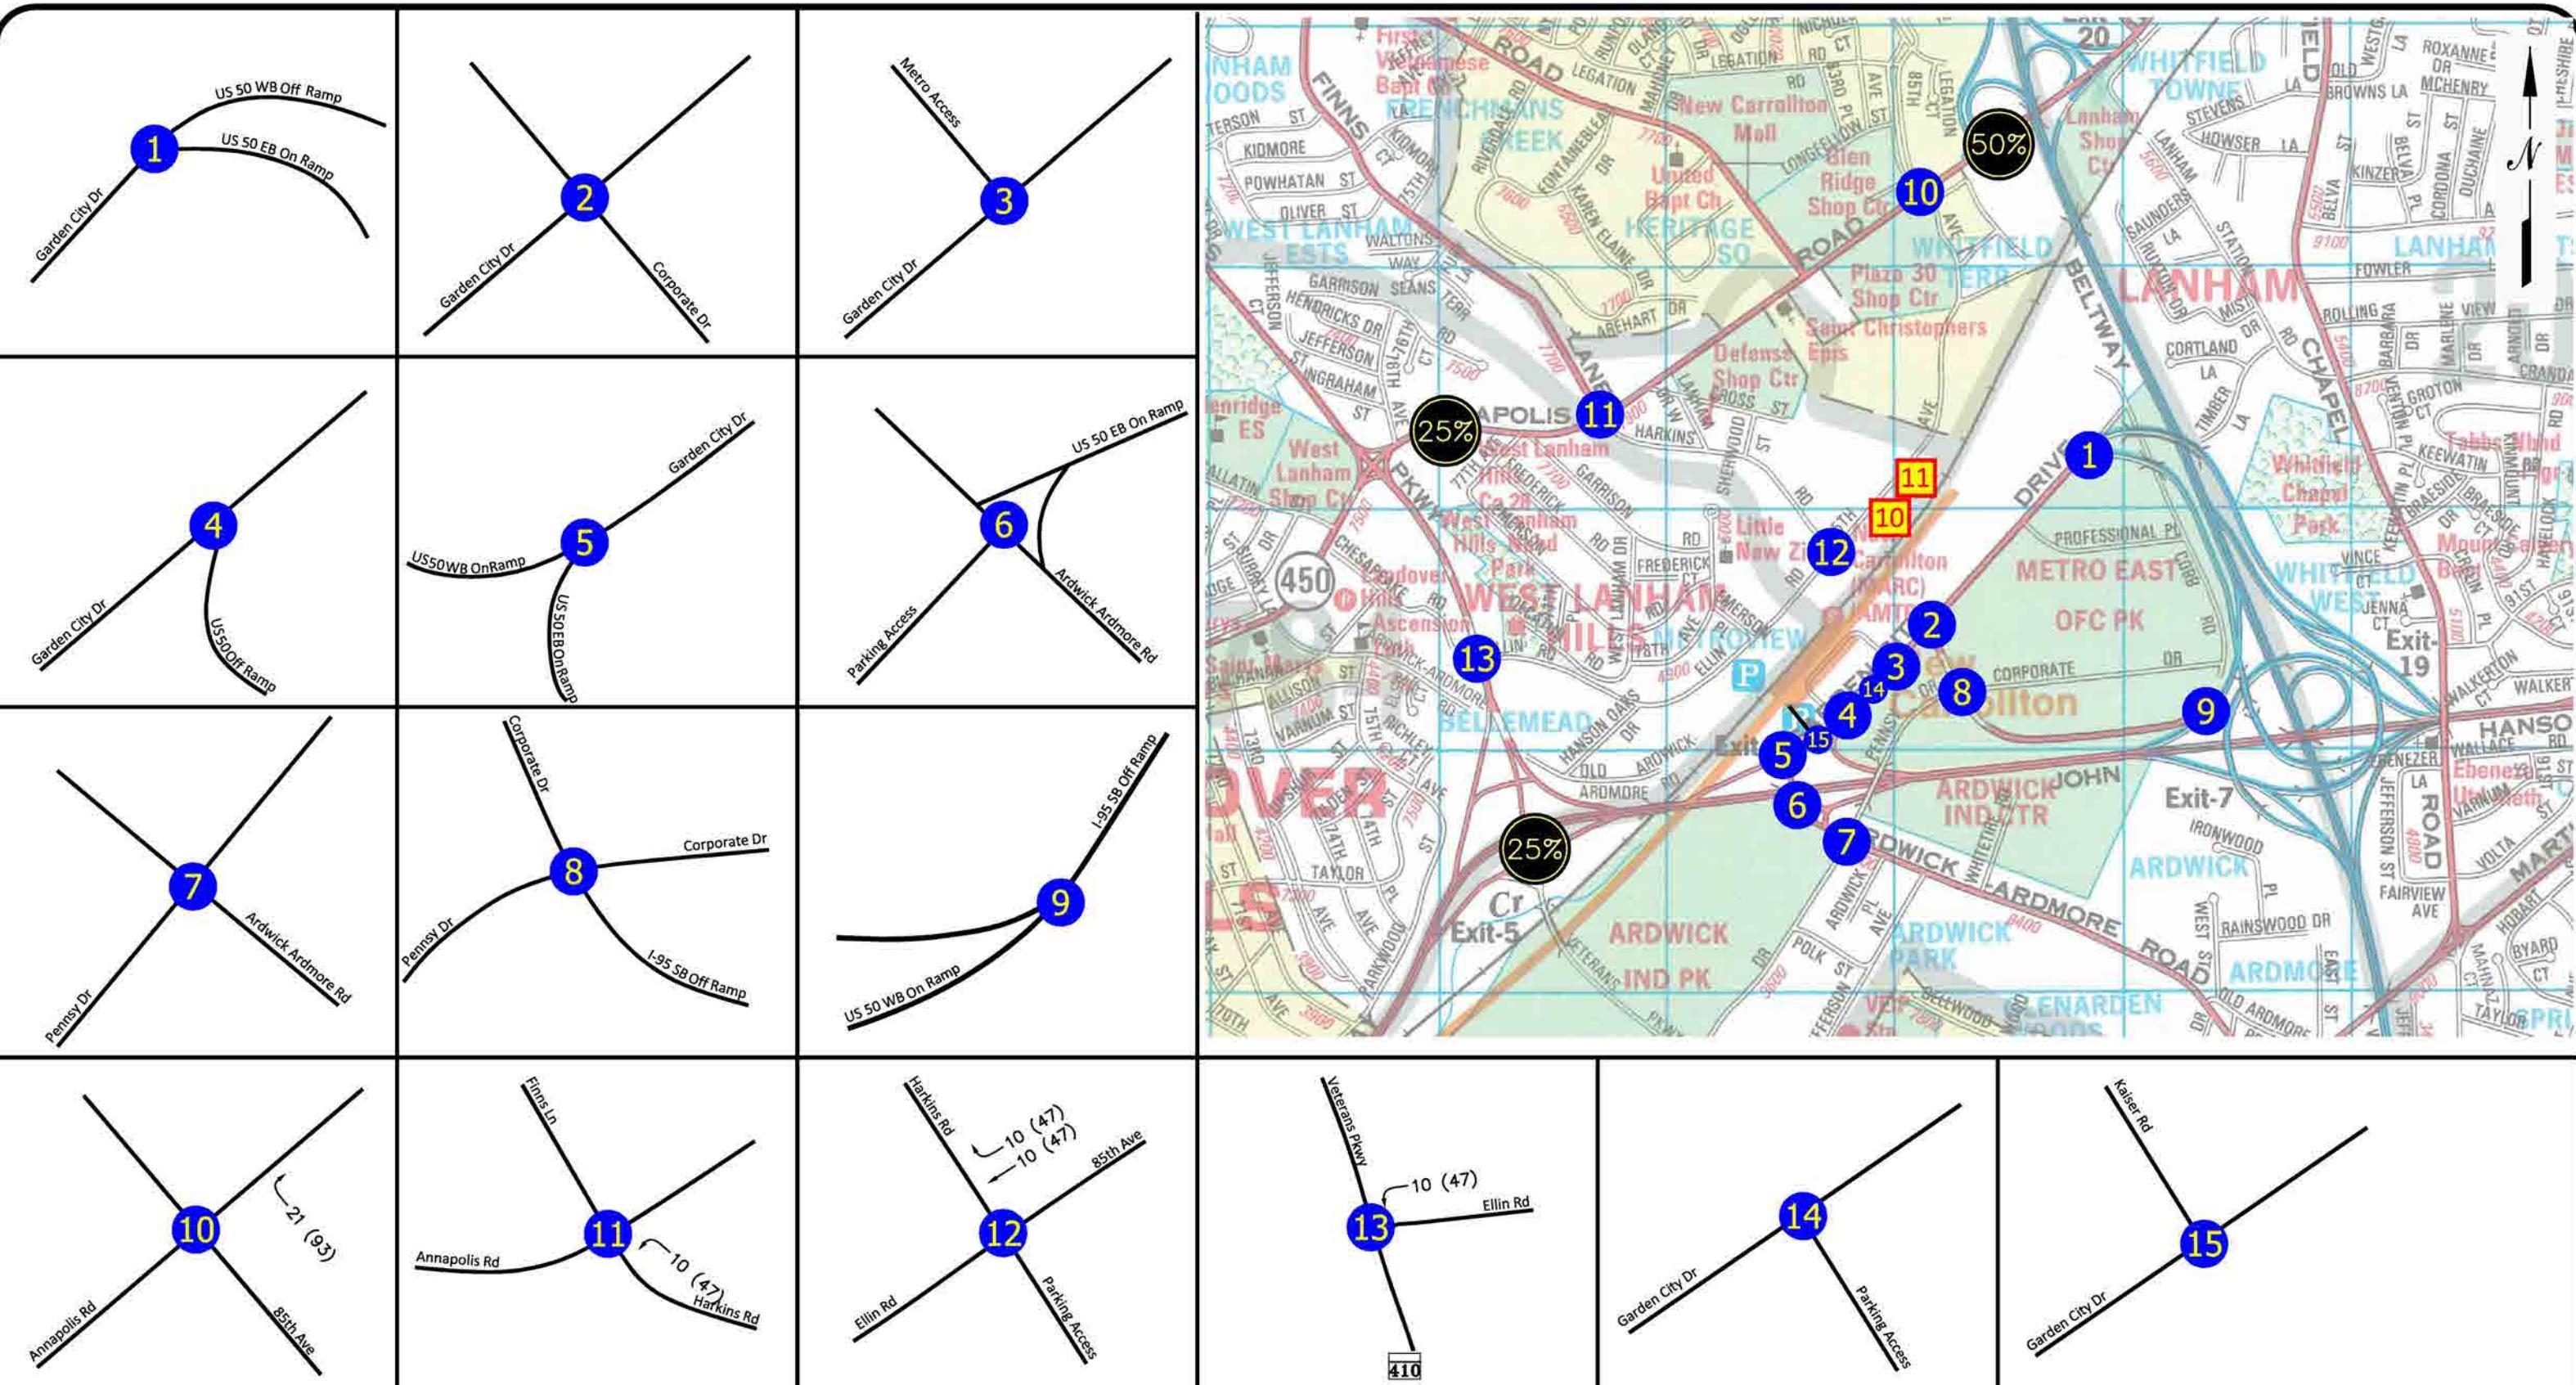

NOT TO SCALE
 00 - MORNING PEAK HOUR
 (00) - EVENING PEAK HOUR

Out: 41 (187)

EXHIBIT D-16
 TRIP ASSIGNMENT FOR
 BUILDINGS #10 & #11 OUTBOUND TRIPS

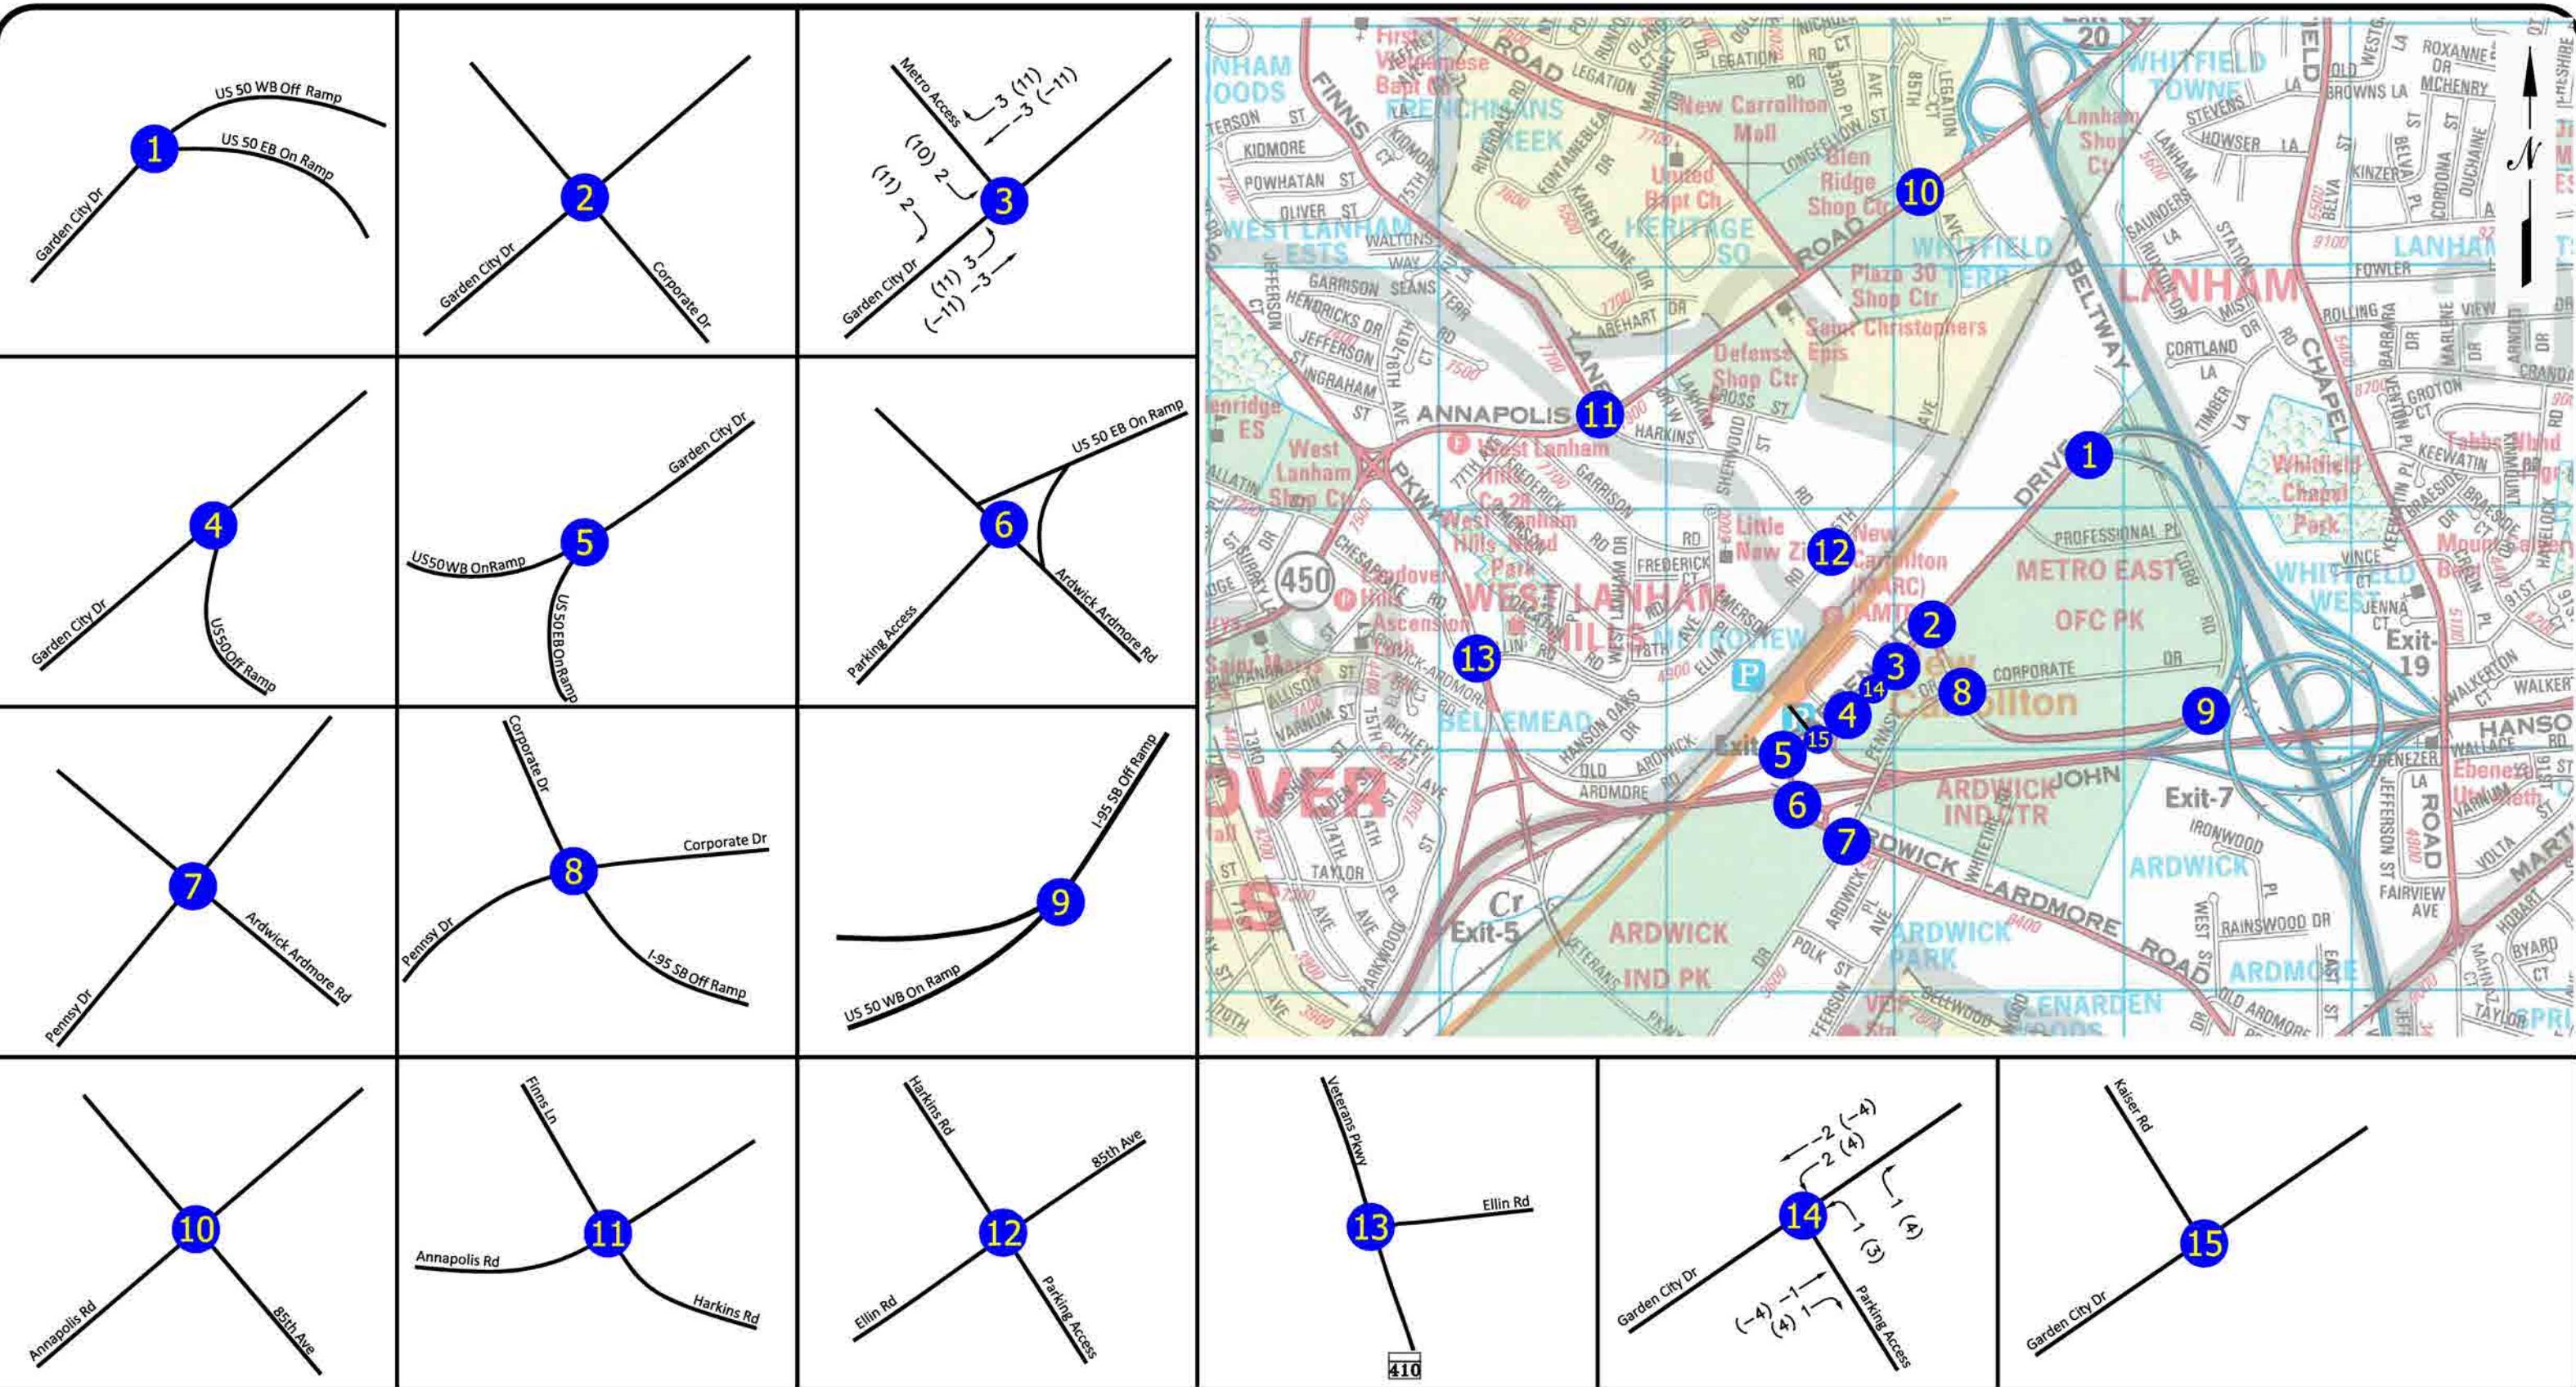

NOT TO SCALE
00 - MORNING PEAK HOUR
(00) - EVENING PEAK HOUR


Pass-By Trips
Build#1~#5 Building #6 Building #7~#9 Building #10 & #11
In: 6 (22) In: 3 (8) In: 1(4) In: 2 (8)
Out: 4 (21) Out: 2 (7) Out: 1 (4) Out: 2 (7)

EXHIBIT D-17
PASS-BY TRIP ASSIGNMENT FOR
BUILDINGS #1 ~ #10


APPENDIX E
Vissim Simulation Results



Existing Condition, Intersections Numbers

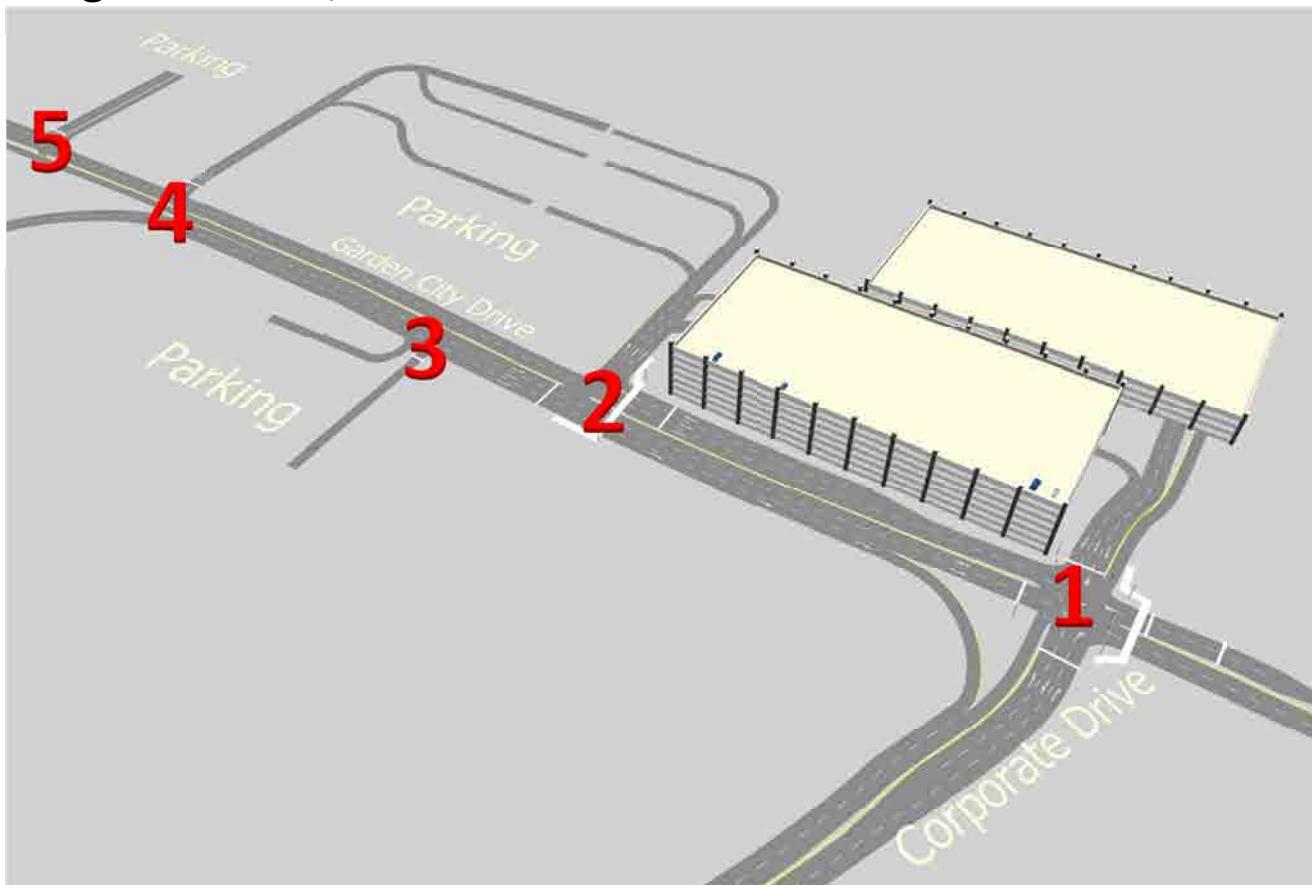

2030 Total Condition, Intersections Numbers

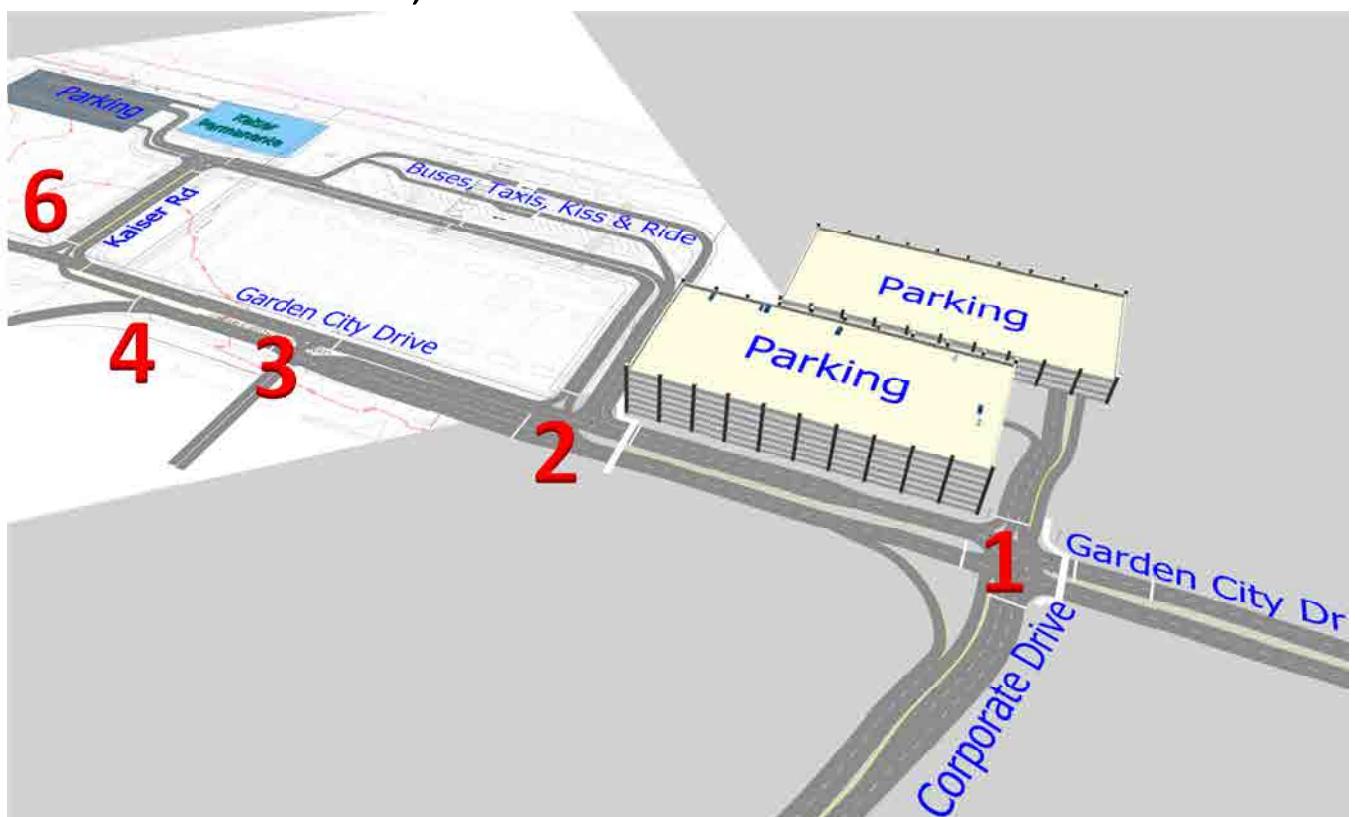

RESULTS OF INTERSECTION CAPACITY ANALYSIS (VISSIM)

(LOS/Total Delay in seconds)

	EXISTING	2030 TOTAL
MORNING PEAK HOUR TRAFFIC		
1. Garden City Dr & Corporate Dr	A/9.8	B/15.7
2. Garden City Dr & Metrostation	A/3.2	B/12.3
3. Garden City Dr & SHA Parking	A/4.8 *	A/2.4
4. Garden City Dr & US 50 Offramp	A/9.2 *	A/4.4
5. Garden City Dr & County Parking	A/8.3 *	n/a
6. Garden City Dr & new Kaiser Rd	n/a	A/9.4
EVENING PEAK HOUR TRAFFIC		
1. Garden City Dr & Corporate Dr	B/15.1	B/15.5
2. Garden City Dr & Metrostation	A/2.6	B/15.8
3. Garden City Dr & SHA Parking	A/6.8 *	A/7.4
4. Garden City Dr & US 50 Offramp	B/14.1 *	A/9.7
5. Garden City Dr & County Parking	B/11.9 *	n/a
6. Garden City Dr & new Kaiser Rd	n/a	B/17.5

NOTE:

1. An * indicates worst movement delay at an unsignalized intersection.
2. Intersections 1 and 2 are signalized under Existing condition, and all are signalized under 2030 Total condition.
3. Total Traffic is derived from combining Existing Traffic, growth, nearby projects and subject site.



RESULTS OF INTERSECTION CAPACITY ANALYSIS (VISSIM)

QUEUING ANALYSIS (VISSIM)
(Average Queue/Maximum Queue) in feet

	EXISTING	2030 TOTAL
MORNING PEAK HOUR TRAFFIC		
1. Garden City Dr & Corporate Dr		
NB LT on Garden City Dr	16/111	13/112
SB LT on Garden City Dr	27/406	31/348
WB on Corporate Dr	22/139	66/371
EB from Garages	1/34	1/32
2. Garden City Dr & Metrostation		
NB LT on Garden City Dr	11/170	52/188
3. Garden City Dr & SHA Parking		
WB exiting Parking Lot	0/26	13/113
4. Garden City Dr & US 50 Offramp		
EB exiting Parking Lot	15/122	n/a
Queue on Offramp	0/0	11/197
5. Garden City Dr & County Parking		
EB exiting Parking Lot	0/45	n/a
6. Garden City Dr & new Kaiser Rd		
EB exiting	n/a	23/103
EVENING PEAK HOUR TRAFFIC		
1. Garden City Dr & Corporate Dr		
NB LT on Garden City Dr	12/103	10/81
SB LT on Garden City Dr	11/201	2/108
WB on Corporate Dr	20/139	49/206
EB from Garages	40/186	32/163
2. Garden City Dr & Metrostation		
NB LT on Garden City Dr	2/74	27/147
3. Garden City Dr & SHA Parking		
WB exiting Parking Lot	3/69	56/186
4. Garden City Dr & US 50 Offramp		
EB exiting Parking Lot	28/157	n/a
Queue on Offramp	0/0	13/134
5. Garden City Dr & County Parking		
EB exiting Parking Lot	4/73	n/a
6. Garden City Dr & new Kaiser Rd		
EB exiting	n/a	60/229

NOTE:

1. Intersections 1 and 2 are signalized under Existing condition, and all are signalized under 2030 Total condition.
2. Total Traffic is derived from combining Existing Traffic, growth, nearby projects and subject site.



**RESULTS OF VISSIM QUEUING ANALYSIS
(AVERAGE QUEUE/MAXIMUM QUEUE)**

* File: F:\2010-1023A\eng\2016 May\Simulation\NC Existing AM.inpx
 * Comment:
 * Date: 8/8/16
 * PTV Vissim: 8.00 [12]
 *
*** Table: Node Results**
 *
 * TIMEINT: TimeInt, Time interval
 * MOVEMENT: Movement, Movement
 * QLEN: QLen, Queue length (Average queue length) [ft]
 * QLENMAX: QLenMax, Queue length (maximum) [ft]
 * VEHS(ALL): Vehs(All), Vehicles (All) (Number of vehicles)
 * VEHDELAY(ALL): VehDelay(All), Vehicle delay (average) (All) (Delay of all vehicles).
 *

TIMEINT	MOVEMENT	QLEN	QLENMAX	VEHS(ALL)	VEHDELAY(ALL)
1000-4600	1-9@131.3-9@236.1	4.29	59.02	146	6.84
1000-4600	1-9@131.3-18@52.3	16.05	111.42	48	18.3
1000-4600	1-10@95.9-10@123.1	0	0	190	0.1
1000-4600	1-11@138.4-9@236.1	0.63	28.89	2	32.2
1000-4600	1-11@138.4-14@29.8	0.63	28.89	3	29.06
1000-4600	1-17@165.8-3@3.4	12.77	113.23	213	12.74
1000-4600	1-17@165.8-18@52.3	12.77	113.23	40	12.64
1000-4600	1-67@106.1-3@3.4	27.38	406.13	517	12.76
1000-4600	1-67@106.1-14@29.8	27.38	406.13	16	10.81
1000-4600	1-67@106.1-18@52.3	27.38	406.13	142	11.95
1000-4600	1-10010@3.0-3@3.4	0.86	34.05	13	7.69
1000-4600	1-10014@1.9-9@236.1	21.79	138.58	151	4.76
Node 1					A/9.82
1000-4600	2-4@210.1-5@61.1	3.91	156.93	266	0.21
1000-4600	2-8@421.9-21@40.8	11.25	170.32	306	8.32
1000-4600	2-8@421.9-68@120.8	7.93	161.51	384	0.07
1000-4600	2-10028@4.4-21@40.8	5.08	157.27	478	4.08
Node 2					A/3.2
1000-4600	3-5@177.9-5@251.1	0	0	228	0.04
1000-4600	3-5@177.9-65@7.8	0.21	29.59	38	2.32
1000-4600	3-8@229.3-8@304.7	0.03	10.02	689	0.26
1000-4600	3-8@229.3-65@7.8	0.03	10.02	38	0.69
1000-4600	3-66@187.6-8@304.7	0.04	25.76	1	A/4.82
Node 3					Unsignalized
1000-4600	4-5@613.5-5@707.5	0	0	228	0.15
1000-4600	4-7@774.9-7@838.3	0	0	682	0.06
1000-4600	4-19@268.6-19@355.2	0	0	2	0.11
1000-4600	4-24@318.6-19@355.2	14.77	121.26	43	A/9.19

1000-4600	4-24@318.6-10018@41.1 Node 4	15.24	121.63	245	8.9 Unsignalized
1000-4600	5-5@864.4-55@15.3	0	0	380	0.52
1000-4600	5-5@864.4-10039@41.9	0	0	93	0.5
1000-4600	5-10040@1.1-19@109.6	0.12	45.42	2	A/8.3
1000-4600	5-10054@1.8-55@15.3	0.09	33.16	1	6.37
	Node 5				Unsignalized

Sli, 101023A\2016 May\Simulation Rev\Node Results new.xlsx-NC EXISTING AM_NODE RESULTS, F08/08/16

* File: F:\2010-1023A\eng\2016 May\Simulation\NC Existing PM.inpx
 * Comment:
 * Date: 8/8/16
 * PTV Vissim: 8.00 [12]
 *
*** Table: Node Results**
 *
 * TIMEINT: TimeInt, Time interval
 * MOVEMENT: Movement, Movement
 * QLEN: QLen, Queue length (Average queue length) [ft]
 * QLENMAX: QLenMax, Queue length (maximum) [ft]
 * VEHS(ALL): Vehs(All), Vehicles (All) (Number of vehicles)
 * VEHDELAY(ALL): VehDelay(All), Vehicle delay (average) (All) (Delay of all vehicles).
 *

TIMEINT	MOVEMENT	QLEN	QLENMAX	VEHS(ALL)	VEHDELAY(ALL)
1000-4600	1-9@131.3-9@236.1	3.73	50.32	77	12.35
1000-4600	1-9@131.3-18@52.3	12.44	102.72	3	14.97
1000-4600	1-10@95.9-10@123.1	0	0	75	0.08
1000-4600	1-11@138.4-9@236.1	39.11	180.15	184	34.17
1000-4600	1-11@138.4-14@29.8	39.11	180.15	21	18.76
1000-4600	1-17@165.8-3@3.4	12.84	113.7	250	12.88
1000-4600	1-17@165.8-18@52.3	12.84	113.7	3	16.12
1000-4600	1-67@106.1-3@3.4	11.09	200.69	255	17.92
1000-4600	1-67@106.1-14@29.8	11.09	200.69	8	17.22
1000-4600	1-67@106.1-18@52.3	11.09	200.69	4	16.78
1000-4600	1-10010@3.0-3@3.4	40.23	185.83	316	9.06
1000-4600	1-10014@1.9-9@236.1	20.48	139.05	59	4.1
Node 1					B/15.07
1000-4600	2-4@210.1-5@61.1	8.41	181.63	598	2.62
1000-4600	2-8@421.9-21@40.8	2.15	73.82	85	3.55
1000-4600	2-8@421.9-68@120.8	1.58	65.13	156	2.19
1000-4600	2-10028@4.4-21@40.8	5.85	177.37	220	2.4
Node 2					A/2.59
1000-4600	3-5@177.9-5@251.1	0	0	595	0.02
1000-4600	3-5@177.9-65@7.8	0	5.34	1	1.84
1000-4600	3-8@229.3-8@304.7	0	0	219	0.15
1000-4600	3-8@229.3-65@7.8	0	0	1	0.54
1000-4600	3-66@187.6-5@251.1	2.88	68.71	46	A/6.83
1000-4600	3-66@187.6-8@304.7	2.56	67.22	22	5.1
Node 3					Unsignalized
1000-4600	4-5@613.5-5@707.5	0	0	642	0.15
1000-4600	4-7@774.9-7@838.3	0	0	147	0.01
1000-4600	4-19@268.6-19@355.2	0	0	3	0.07

1000-4600	4-24@318.6-19@355.2	26.67	157.09	71	11.69
1000-4600	4-24@318.6-10018@41.1	27.81	157.46	278	B/14.07
Node 4					Unsignalized
1000-4600	5-5@864.4-55@15.3	0	0	918	0.17
1000-4600	5-5@864.4-10039@41.9	0	0	2	0.37
1000-4600	5-10040@1.1-19@109.6	3.85	73.31	3	10.77
1000-4600	5-10054@1.8-55@15.3	4.19	61.05	69	B/11.93
Node 5					Unsignalized

Sli, 101023A\2016 May\Simulation Rev\Node Results new.xlsx-NC EXISTING PM_NODE RESULTS, F08/08/16

* File: F:\2010-1023A\eng\2016 May\Simulation Rev\NC Total 2030 AM.inpx
 * Comment:
 * Date: 8/8/16
 * PTV Vissim: 8.00 [12]
 *
*** Table: Node Results**
 *
 * TIMEINT: TimeInt, Time interval
 * MOVEMENT: Movement, Movement
 * QLEN: QLen, Queue length (Average queue length) [ft]
 * QLENMAX: QLenMax, Queue length (maximum) [ft]
 * VEHS(ALL): Vehs(All), Vehicles (All) (Number of vehicles)
 * VEHDELAY(ALL): VehDelay(All), Vehicle delay (average) (All) (Delay of all vehicles).
 *

TIMEINT	MOVEMENT	QLEN	QLENMAX	VEHS(ALL)	VEHDELAY(ALL)
1000-4600	1-9@131.8-9@236.4	12.85	111.85	177	12.51
1000-4600	1-9@131.8-18@52.3	12.97	112.16	49	42
1000-4600	1-10@63.2-10@90.6	0	0	416	0.32
1000-4600	1-11@138.4-9@236.4	0.86	27.03	2	46.43
1000-4600	1-11@138.4-14@29.8	0.86	27.03	3	40.99
1000-4600	1-17@165.8-3@2.9	51.45	348.49	829	16.14
1000-4600	1-17@165.8-18@52.3	51.45	348.49	47	20.01
1000-4600	1-63@49.5-63@76.8	0	0	0	
1000-4600	1-67@477.2-3@2.9	28.33	347.82	727	20.64
1000-4600	1-67@477.2-14@29.8	28.33	347.82	186	19.98
1000-4600	1-10010@3.1-3@2.9	1.04	32.38	12	6.69
1000-4600	1-10014@1.9-9@236.4	65.5	370.79	184	15.92
1000-4600	1-10036@3.5-18@52.3	31.26	342.42	152	20.29
Node 1					B/15.72

1000-4600	2-29@2.5-5@29.6	38.25	351.85	800	12.57
1000-4600	2-29@2.5-21@45.1	38.25	351.85	767	8.79
1000-4600	2-54@189.5-10059@44.8	69.56	113.28	7	13.19
1000-4600	2-93@253.4-21@45.1	51.91	188.35	457	21.32
1000-4600	2-93@253.4-68@101.5	51.91	188.35	641	9.53
Node 2					B/12.26

1000-4600	3-5@309.5-5@379.3	0.75	87.25	760	1.45
1000-4600	3-5@309.5-65@3.8	3.54	129.45	48	9.45
1000-4600	3-8@185.3-65@3.8	1.17	65.63	48	0.63
1000-4600	3-8@185.3-10058@9.8	1.17	65.63	626	1.15
1000-4600	3-8@185.3-10060@10.9	1.17	65.63	317	0.92
1000-4600	3-8@185.3-10061@16.9	1.17	65.63	141	0.84
1000-4600	3-66@189.5-5@379.3	12.81	113.46	34	50.59
1000-4600	3-10043@4.8-10058@9.8	11.9	112.29	15	15.63
1000-4600	3-10043@4.8-10060@10.9	11.9	112.29	0	

A/2.37					
Node 3					
1000-4600	4-7@794.3-10018@16.7	11.09	196.89	1063	3.5
1000-4600	4-19@117.6-10004@19.0	6.25	49.1	67	17.9
A/4.35					
1000-4600	6-5@727.2-5@819.3	0.18	51.49	671	0.41
1000-4600	6-24@232.9-10040@44.7	22.86	103.05	297	27.02
1000-4600	6-24@232.9-10057@0.0	21.98	101.81	68	44.85
1000-4600	6-10039@2.0-48@3.5	0.17	51.39	123	0.89
1000-4600	6-10057@0.3-10057@71.0	22.47	103.41	68	0.68
A/9.36					
Node 4					

Sli_101023A\2016 May\Simulation Rev\Node Results new.xlsx-NC TOTAL 2030 AM_NODE RESULTS, F08/08/16

* File: F:\2010-1023A\eng\2016 May\Simulation Rev\NC Total 2030 PM.inpx
 * Comment:
 * Date: 8/8/16
 * PTV Vissim: 8.00 [12]
 *
*** Table: Node Results**
 *
 * TIMEINT: TimeInt, Time interval
 * MOVEMENT: Movement, Movement
 * QLEN: QLen, Queue length (Average queue length) [ft]
 * QLENMAX: QLenMax, Queue length (maximum) [ft]
 * VEHS(ALL): Vehs(All), Vehicles (All) (Number of vehicles)
 * VEHDELAY(ALL): VehDelay(All), Vehicle delay (average) (All) (Delay of all vehicles).
 *

TIMEINT	MOVEMENT	QLEN	QLENMAX	VEHS(ALL)	VEHDELAY(ALL)
1000-4600	1-9@131.8-9@236.4	9.63	80.37	157	17.79
1000-4600	1-9@131.8-18@52.3	9.73	80.68	3	21.41
1000-4600	1-10@63.2-10@90.6	0	0	253	0.24
1000-4600	1-11@138.4-9@236.4	29.26	157.58	192	24.73
1000-4600	1-11@138.4-14@29.8	29.26	157.58	22	22.17
1000-4600	1-17@165.8-3@2.9	36.02	183.78	613	17.06
1000-4600	1-17@165.8-18@52.3	36.02	183.78	2	19.63
1000-4600	1-67@477.2-3@2.9	1.78	108.25	318	21.95
1000-4600	1-67@477.2-14@29.8	1.78	108.25	75	23.51
1000-4600	1-10010@3.1-3@2.9	31.51	163.26	335	8.77
1000-4600	1-10014@1.9-9@236.4	49.46	206.07	132	16.88
1000-4600	1-10036@3.5-18@52.3	1.67	97.24	4	17.12
Node 1					B/15.5
1000-4600	2-29@2.5-5@29.6	57.27	407.69	928	16.65
1000-4600	2-29@2.5-21@45.1	57.27	407.69	337	10.21
1000-4600	2-75@189.5-68@101.0	10.35	90.61	49	43.39
1000-4600	2-75@189.5-10062@43.4	10.35	90.61	28	5.22
1000-4600	2-93@253.4-21@45.1	27.28	147.49	123	27.85
1000-4600	2-93@253.4-68@101.0	27.28	147.49	365	11.89
Node 2					B/15.82
1000-4600	3-5@309.5-5@379.3	4.34	209.85	920	2.07
1000-4600	3-5@309.5-65@6.1	7	254.02	35	3.52
1000-4600	3-8@185.3-65@6.1	1.5	83.19	17	1.04
1000-4600	3-8@185.3-10058@9.8	1.5	83.19	335	1.38
1000-4600	3-8@185.3-10060@10.9	1.5	83.19	69	1.86
1000-4600	3-8@185.3-10061@16.9	1.5	83.19	56	2.2
1000-4600	3-66@188.2-5@379.3	55.6	186.2	71	88.11
1000-4600	3-10043@3.4-8@256.8	54.63	185.03	4	70.62
1000-4600	3-10043@3.4-10058@9.8	54.63	185.03	31	62.87

1000-4600	3-10043@3.4-10060@10.9 Node 3	54.63	185.03	0	24.78 A/7.41
1000-4600	4-7@794.3-10018@16.7	12.87	133.93	330	11.74
1000-4600	4-19@128.6-10004@19.0 Node 4	3.62	41.45	148	5.16 A/9.7
1000-4600	6-5@727.2-5@819.0	40.97	371.35	979	12.23
1000-4600	6-10039@6.4-48@9.0	40.93	371.27	13	13.6
1000-4600	6-10040@14.4-10040@50.9	57.79	222.89	592	21.22
1000-4600	6-10057@14.7-10057@83.8 Node 6	60.1	228.59	149	37.32 B/17.46

Sli_101023A\2016 May\Simulation Rev\Node Results new.xlsx-NC TOTAL 2030 PM_NODE RESULTS, F08/08/16

APPENDIX C:


Approved 2013 Natural Resources Inventory Plan

卷之三

LEGEND

- | | |
|--|---------------------------------|
| | PROPERTY BOUNDARY |
| | SOIL LINE |
| | WL |
| | WETLANDS |
| | WB |
| | WETLAND BUFFER |
| | WATERS OF THE U.S. |
| | SB |
| | STREAM BUFFER |
| | FP |
| | FLOODPLAIN |
| | PMA |
| | PMA - |
| | PRIMARY MANAGEMENT AREA |
| | FOREST STAND BOUNDARY |
| | SHRUB & NON-WOODLAND VEGETATION |
| | EXISTING WOODLANDS |
| | STEEP SLOPES 15% AND GREATER |
| | EXISTING VEGETATION |

SCALE: 1" = 50'

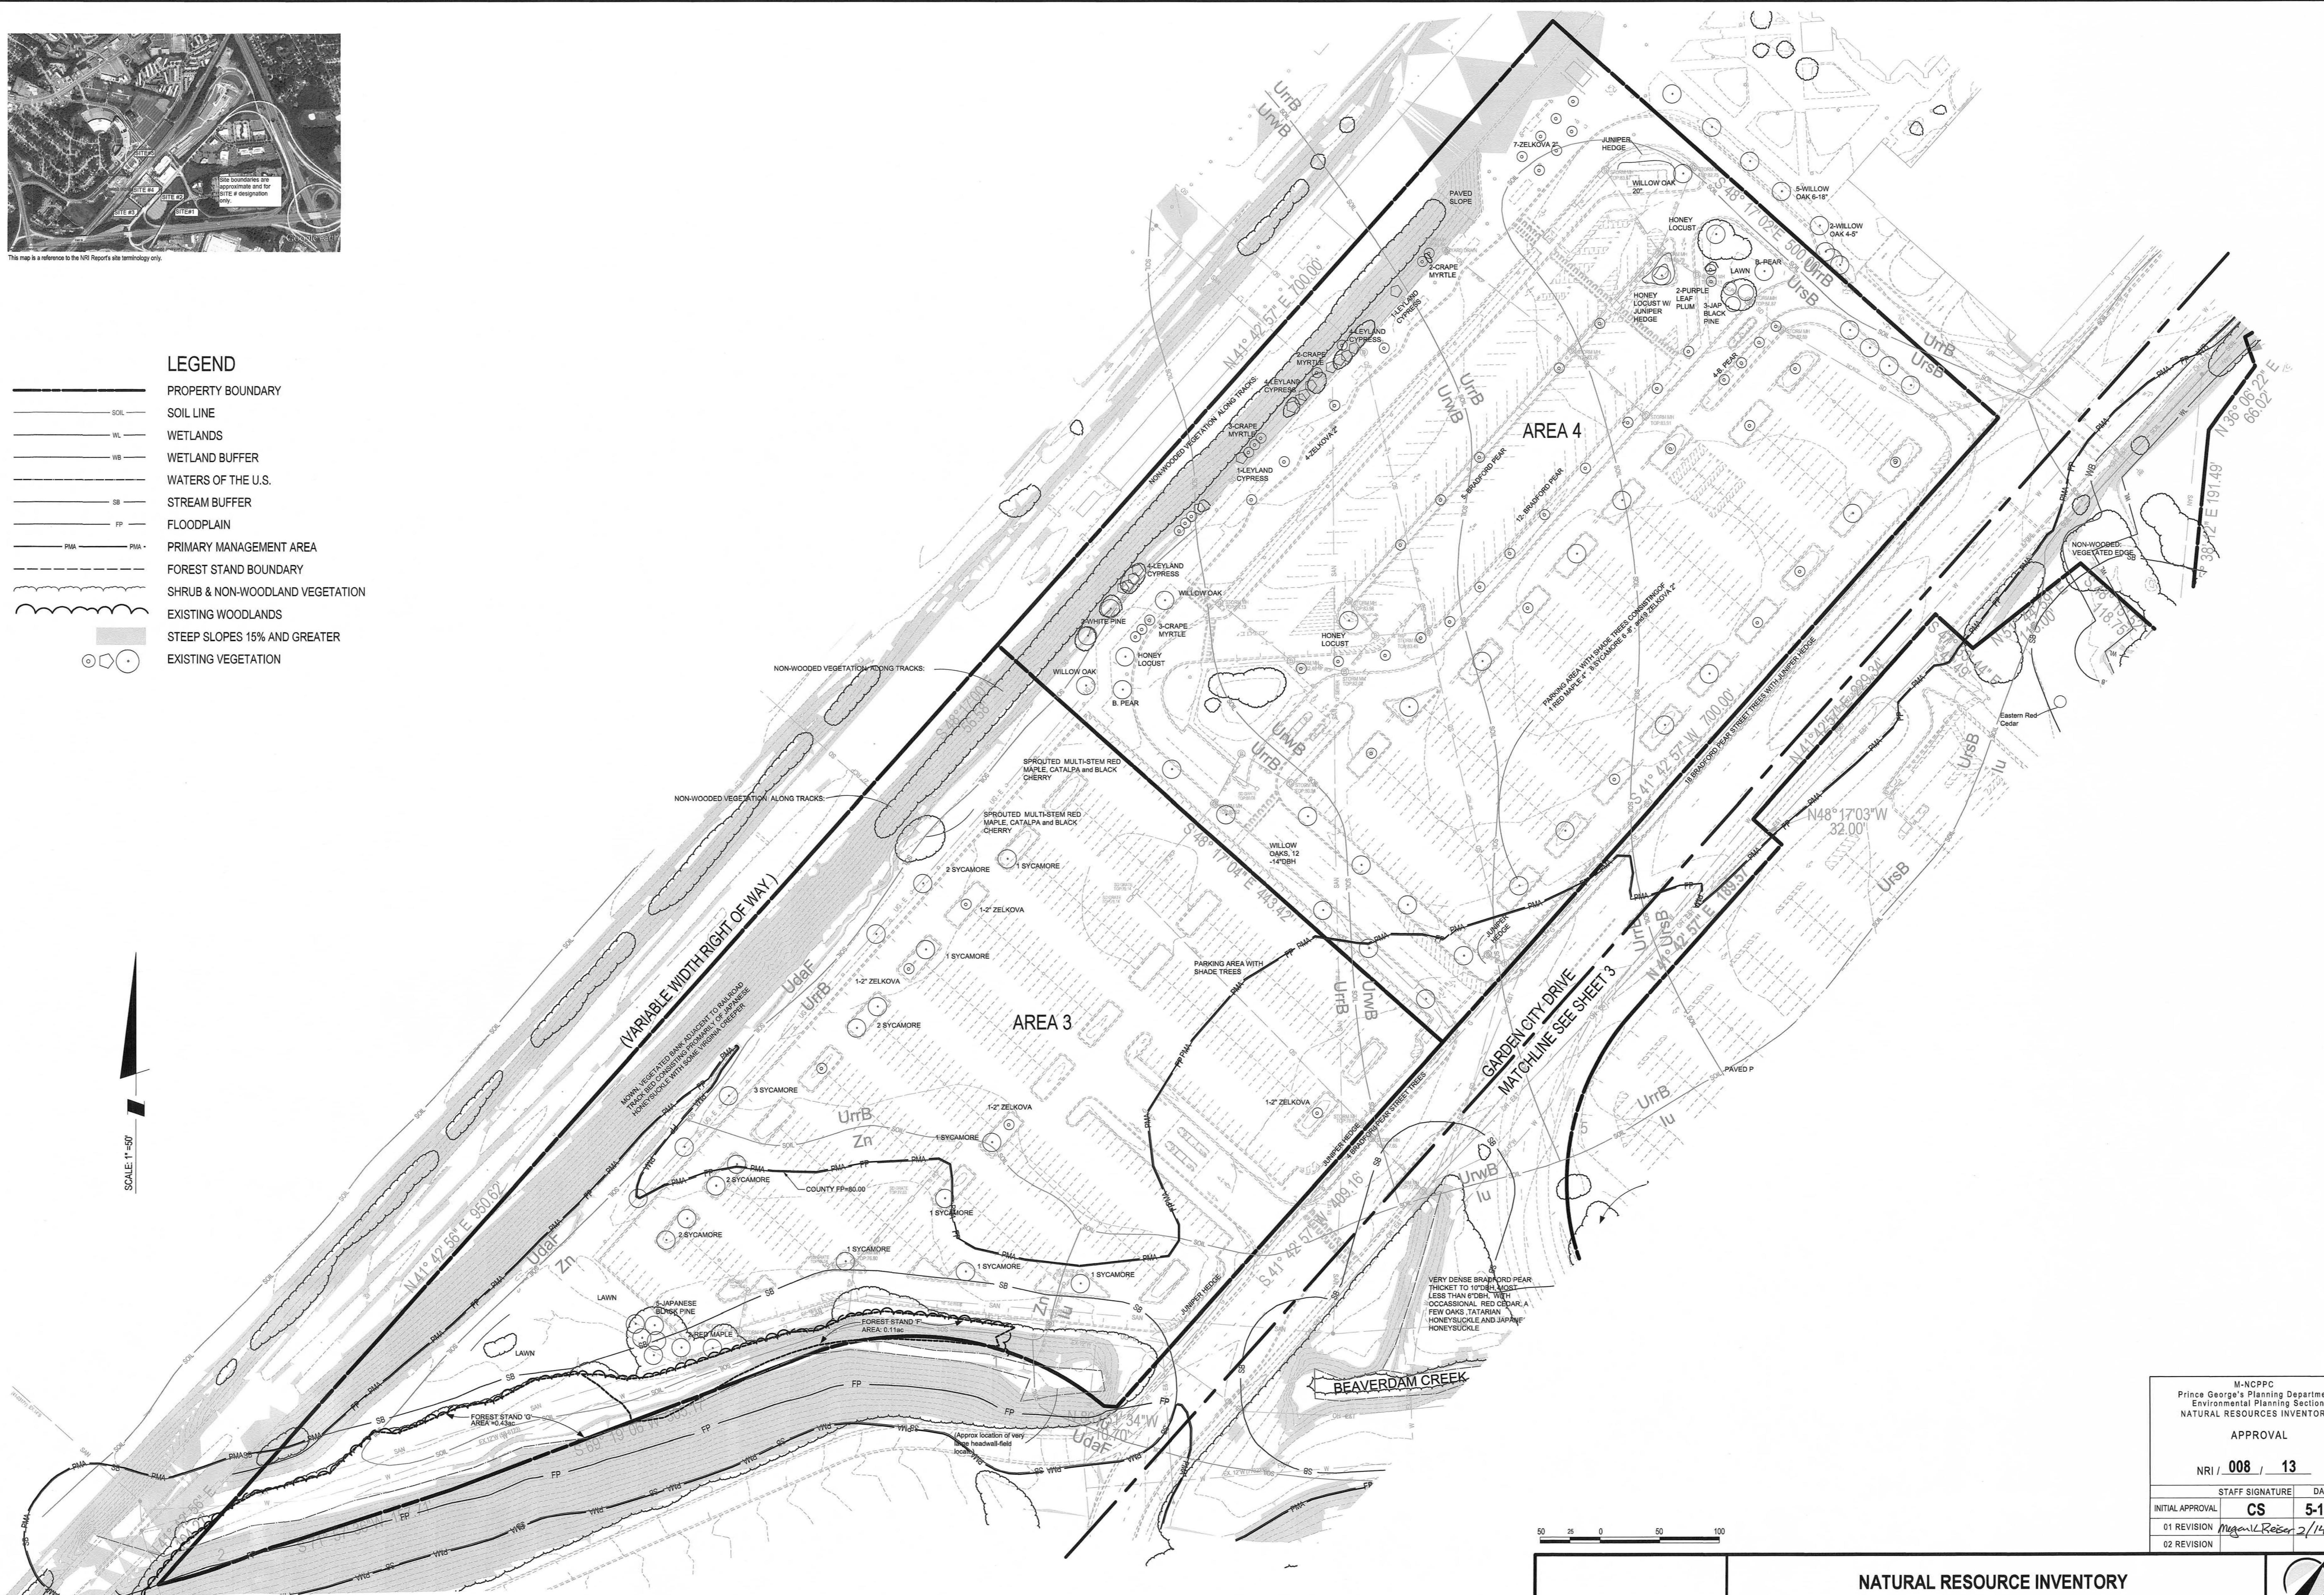

 SOLTESZ, LLC

1

INFORMATION CONCERNING EXISTING UTILITIES
WAS OBTAINED FROM AVAILABLE RECORDS. THE OWNER
MUST DETERMINE THE EXACT LOCATION AND
EXISTING UTILITIES AND UTILITY CROSSINGS BY
PITS BY HAND, WELL IN ADVANCE OF THE START
CONTACT "MISS UTILITY" AT 1-800-257-7777, 48
HOURS BEFORE PROCEEDING WITH EXCAVATION. IF CLEARANCES
SHOWN ON THIS PLAN OR TWELVE (12) INCHES
LESS, CONTACT THE ENGINEER AND THE UTILITY
BEFORE PROCEEDING WITH CONSTRUCTION.
ANYTHING OTHER THAN NOTED MAY REQUIRE REVISIONS TO THIS


OWNER/DEVELOPER/APPLICANT

UTILITIES
TRACTOR
ON OF ALL
G TEST
CAVATION.
PRIOR TO
S THAN
EVER IS
ANY
ICES LESS

WASHINGTON METRO AREA TRANSIT AUTHORITY
6TH AND D ST NW
WASHINGTON, DC 20004

MASS TRANSIT AUTHORITY
6 ST. PAUL STREET, SUITE 1204
BALTIMORE, MD 21202

NEW CARROLL
7735 OLD GEORGE
SUITE 600
BETHESDA, MD

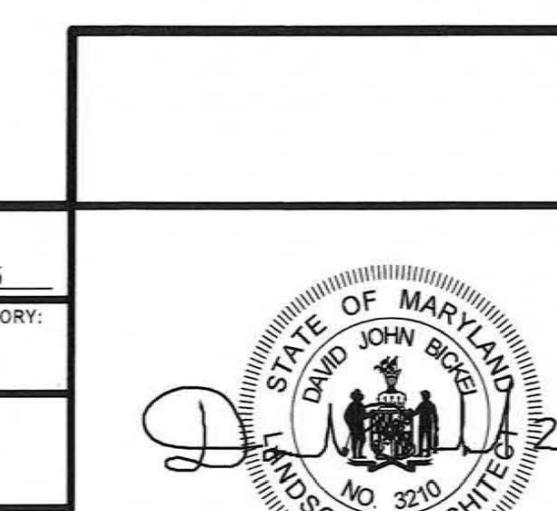

NATURAL RESOURCE INVENTORY

NEW CARROLLTON



M-NCPPC
Prince George's Planning Department
Environmental Planning Section
NATURAL RESOURCES INVENTORY

APPROVAL

NRI / 008 / 13

STAFF SIGNATURE	DATE
APPROVAL	CS
REVISION	Megan L Reiser 2/14/17
REVISION	


REVISION

A vertical column of text and symbols. At the top is a horizontal scale bar with arrows at both ends, containing the text "ONE INCH". Below it is a horizontal line with arrows at both ends, labeled "1' = 50'". The next section contains the text "SHEET" followed by a large number "2" underlined. Below that is the text "OF" followed by a large number "4" underlined. The bottom section contains the text "PROJECT NO." followed by the date "1958-00-00".

LEGEND

- | | |
|--|---------------------------------|
| | PROPERTY BOUNDARY |
| | SOIL LINE |
| | WL |
| | WETLANDS |
| | WB |
| | WETLAND BUFFER |
| | WATERS OF THE U.S. |
| | SB |
| | STREAM BUFFER |
| | FP |
| | FLOODPLAIN |
| | PMA |
| | PMA - |
| | PRIMARY MANAGEMENT AREA |
| | FOREST STAND BOUNDARY |
| | SHRUB & NON-WOODLAND VEGETATION |
| | EXISTING WOODLANDS |
| | STEEP SLOPES 15% AND GREATER |
| | EXISTING VEGETATION |

SCALE: 1" = 50'

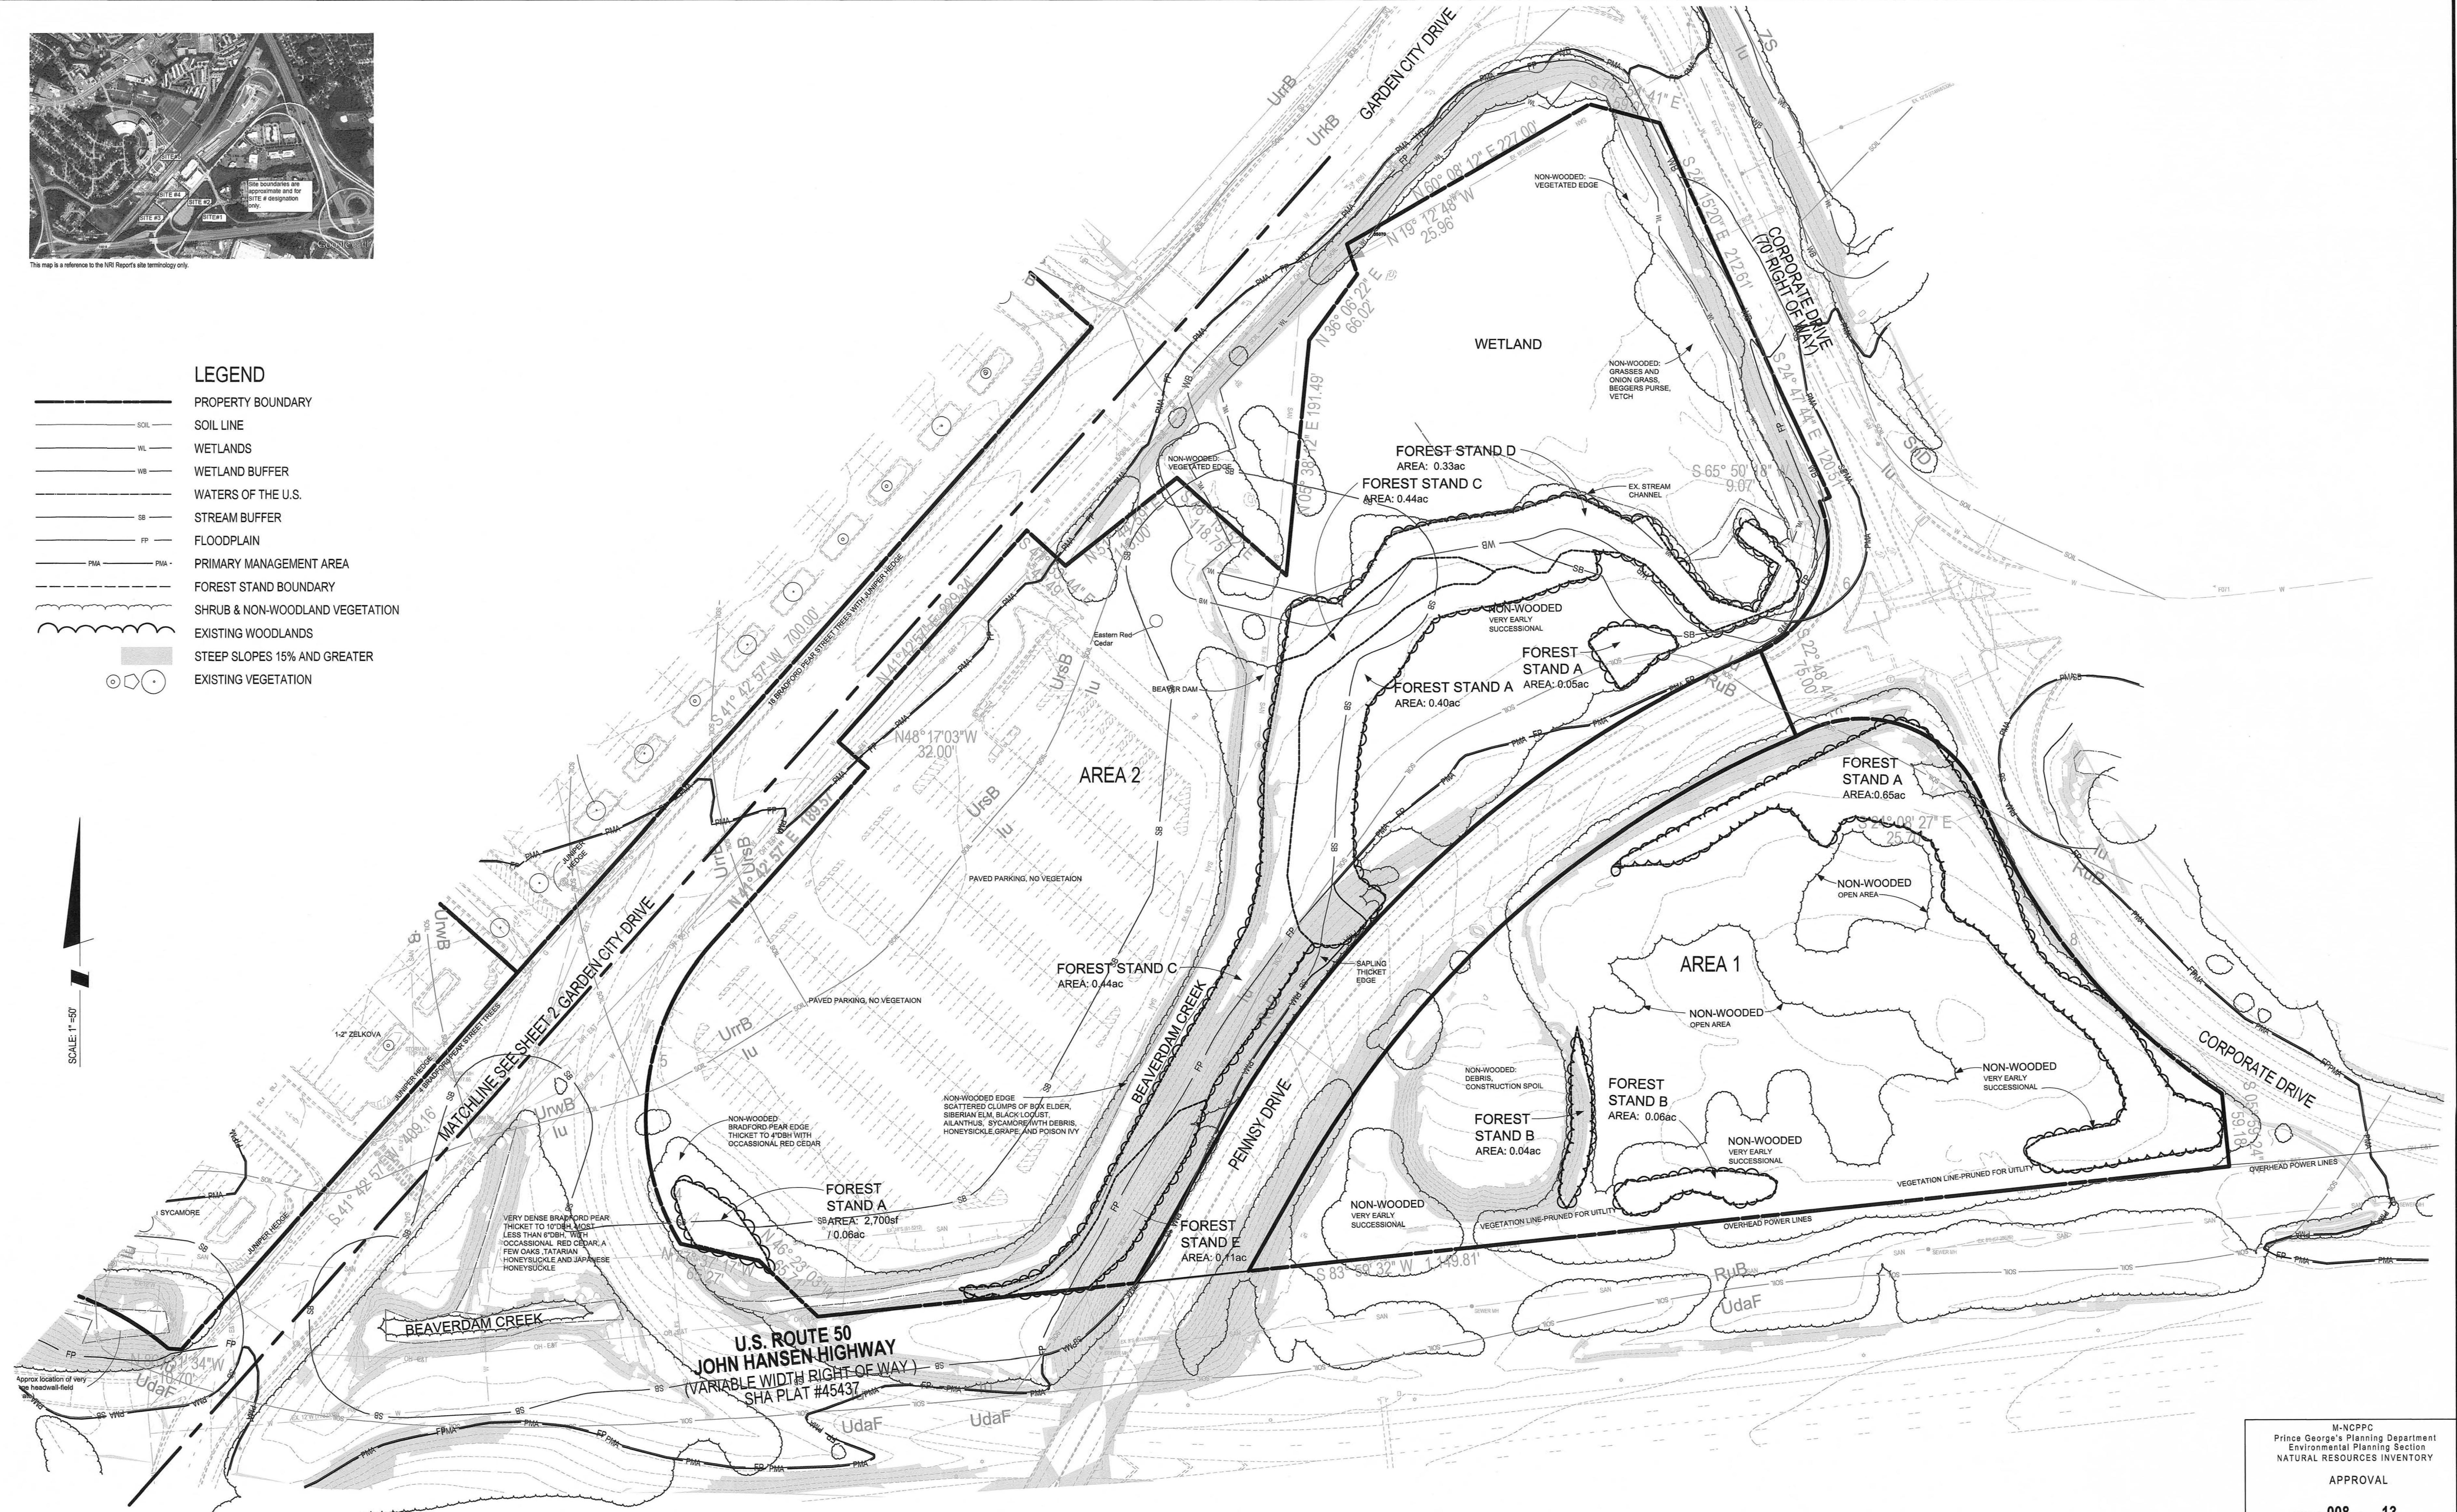

M-NCPPC
Prince George's Planning Department
Environmental Planning Section
NATURAL RESOURCES INVENTORY

NRI /	<u>008</u>	/	<u>13</u>
STAFF SIGNATURE		DATE	
ROVAL	CS	5-1-13	
SION	<u>Megan Kreiser</u>		
SION	<u>2/14/17</u>		

E5	
EGORY:	
T	
:	
X	
:	
 The seal is circular with a decorative outer ring. The words "STATE OF MARYLAND" are at the top, "DAVID JOHN BICKEL" are in the center above a stylized building, and "LANDSCAPE ARCHITECT" are at the bottom. A signature "D.J.B." is written across the left side of the seal, and a date "2-1-" is written vertically on the right side.	

NATURAL RESOURCE INVENTORY

NEW CARROLLTON



Engineering 4300 Forbes Boulevard, Suite 230
Surveying Lanham, MD 20706
Planning P. 301.794.7555 F. 301.794.7656
Environmental Sciences

NO.	REVISIONS		BY
DATE:	JUNE 2016	CAD STANDARDS VERSION:	V8 - 2000
DESIGNED:	YOR	TECHNICIAN:	YOR
			CHECKED: DJB

MISS UTILITY

INFORMATION CONCERNING EXISTING UTILITIES
WAS OBTAINED FROM AVAILABLE RECORDS.
YOU MUST DETERMINE THE EXACT LOCATION OF
EXISTING UTILITIES AND UTILITY CROSSINGS
PITS BY HAND, WELL IN ADVANCE OF EXCAVATION.
CONTACT "MISS UTILITY" AT 1-800-227-1161
THE START OF EXCAVATION. IF CONDITIONS
SHOWN ON THIS PLAN OR TWELVE FEET DEEP
LESS, CONTACT THE ENGINEER AND
BEFORE PROCEEDING WITH CONSTRUCTION,
THAN NOTED MAY REQUIRE REVISION.

OWNER/DEVELOPER/APPLICANT

GROUND UTILITIES
THE CONTRACTOR
ELEVATION OF ALL
Y DIGGING TEST
RT OF EXCAVATION.
WASHINGTON METRO AREA TRANSIT AUTHO
6TH AND D ST NW
WASHINGTON, DC 20004



ITY
NEW CARROLLTON DEVELOPERS
7735 OLD GEORGETOWN ROAD
SUITE 600

R LLC

1



LANHAM (20th) ELECTION DISTRICT, PRINCE GEORGE'S COUNTY, MARYLAND

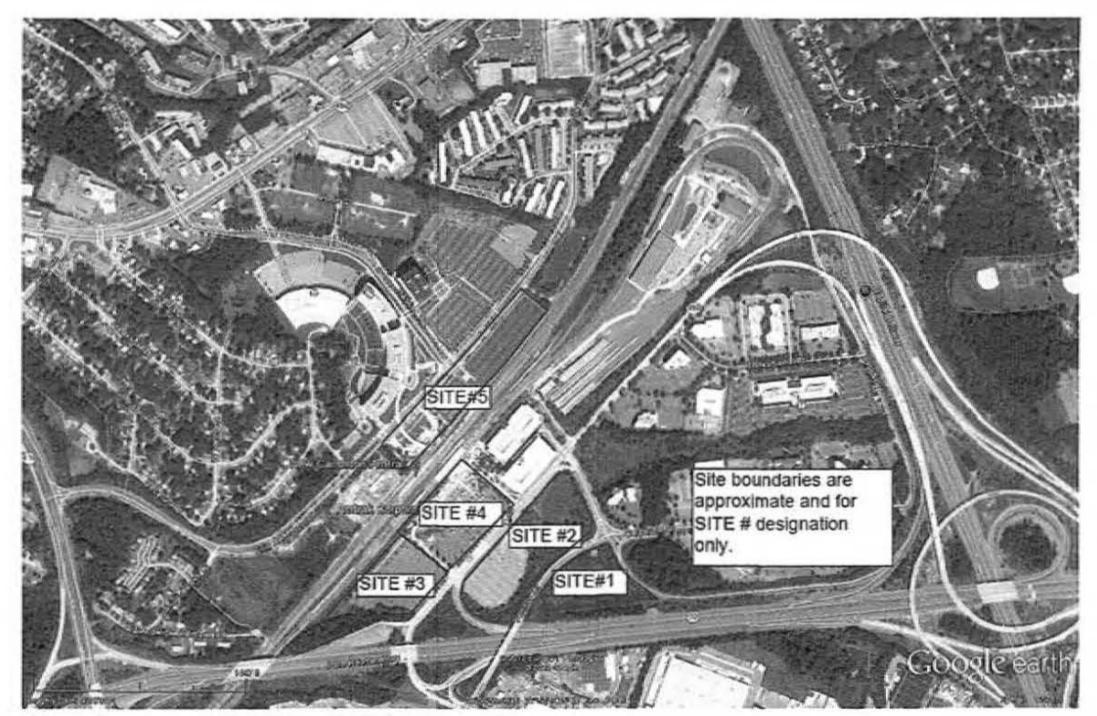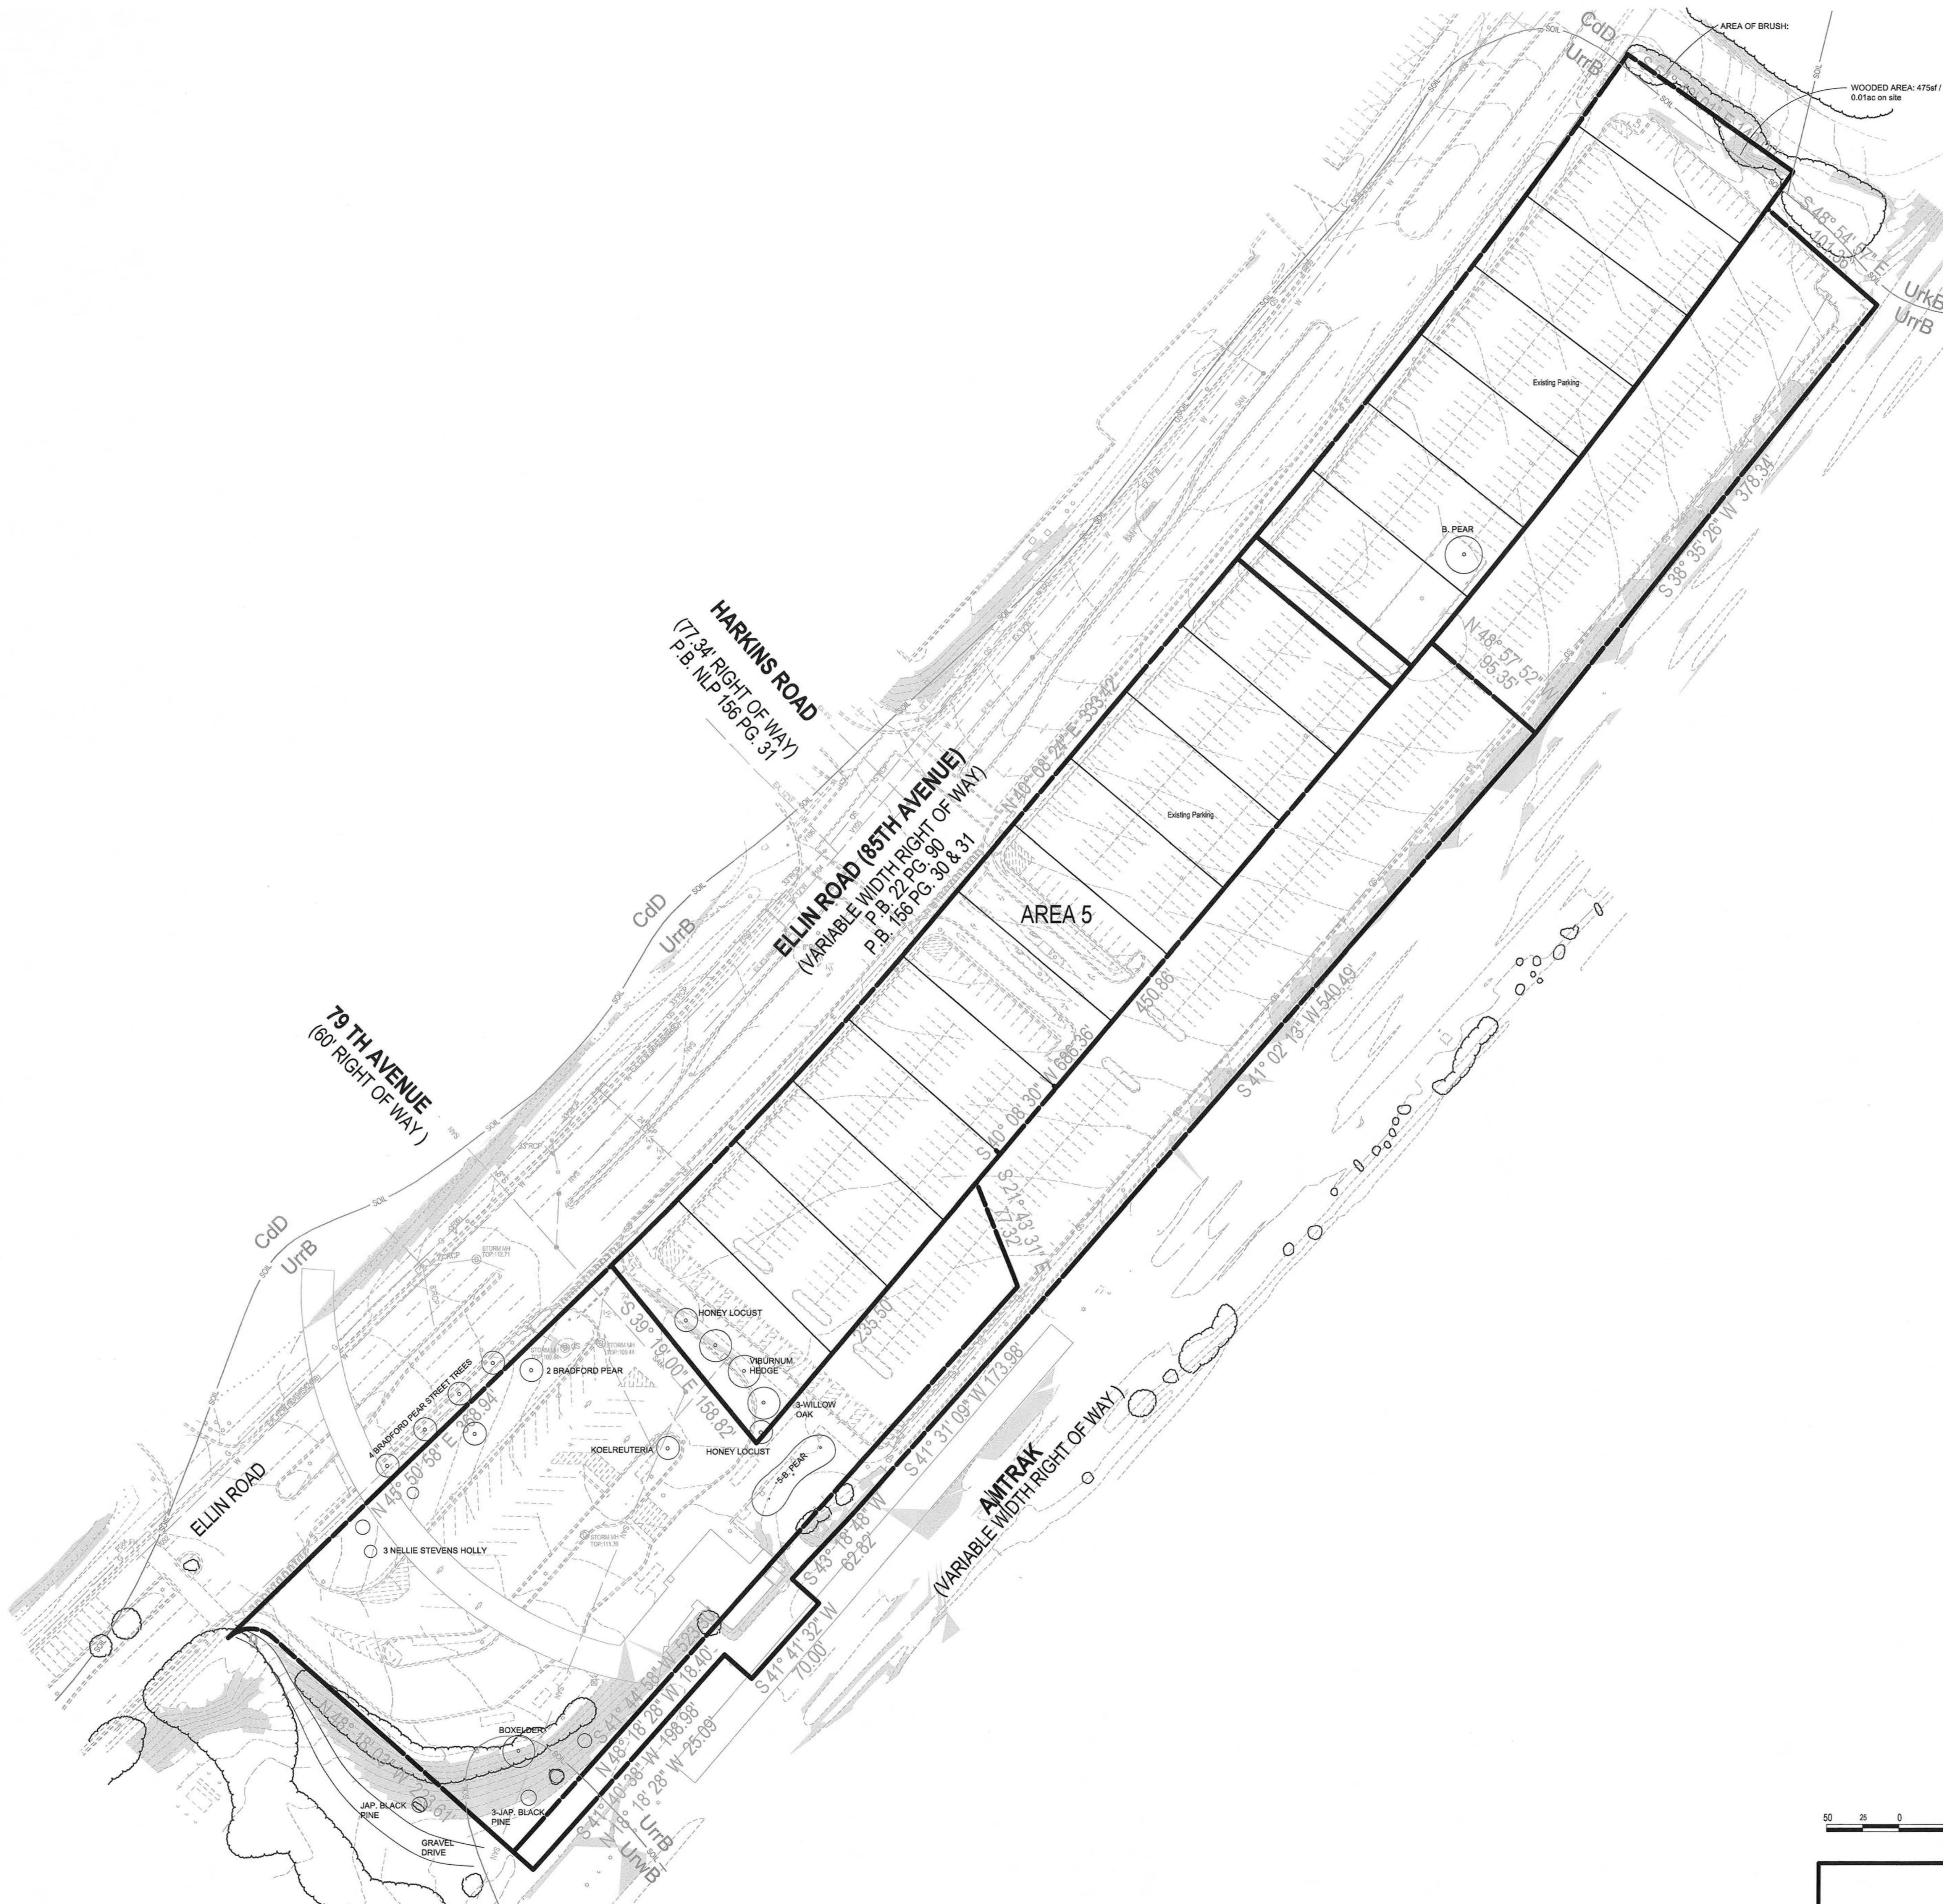

This map is a reference to the NRI Report's site terminology only.

SCALE: 1" = 50'

NATURE DA

M-NCPPC
Prince George's Planning Department
Environmental Planning Section
NATURAL RESOURCES INVENTORY

APPROVAL

NRI / 008 / 13

STAFF SIGNATURE	DATE
INITIAL APPROVAL	<u>CS</u>
01 REVISION	<u>mogen/PEZ</u>
02 REVISION	<u>2/14/17</u>

**NOTE: ALL LAND AREA ON THIS SHEET
IS INCLUDED IN AREA 5 ON THE SITE
STATISTICS TABLE**

NATURAL RESOURCE INVENTORY

NEW CARROLLTON

 SOLTESZ, LLC

Engineering
Surveying
Planning
Environmental Sciences

4300 Forbes Boulevard, Suite 230
Lanham, MD 20706
P. 301.794.7555 F. 301.794.7656

MISS UTI

INFORMATION CONCERNING EXISTING UNDERGROUND
WAS OBTAINED FROM AVAILABLE RECORDS. THE CONTRACTOR
MUST DETERMINE THE EXACT LOCATION AND ELEVATION OF
EXISTING UTILITIES AND UTILITY CROSSINGS BY DRILLING
PITS BY HAND, WELL IN ADVANCE OF THE START OF EXCAVATION.
CONTACT "MISS UTILITY" AT 1-800-257-7777, 48 HOURS
BEFORE THE START OF EXCAVATION. IF CLEARANCES ARE
SHOWN ON THIS PLAN OR TWELVE (12) INCHES, WHETHER
LESS, CONTACT THE ENGINEER AND THE UTILITY COMPANIES
BEFORE PROCEEDING WITH CONSTRUCTION. CLEARANCES
THAN NOTED MAY REQUIRE REVISIONS TO THIS PLAN.

OWNER/DEVELOPER/APPLICANT

WASHINGTON METRO AREA TRANSIT AUTHORITY
6TH AND D ST NW
WASHINGTON, DC 20004

NEW CARROLLTON DEVELOPMENT
7735 OLD GEORGETOWN RD.
SUITE 600
BETHESDA, MD 20814

1

TAX MAP 52, A1	ZONING CATEGORY: M-X-T
WSSC 200' SHEET 206NE07	XXXX: XXXX

-1-

LANHAM (20th) ELECTION DISTRICT, PRINCE GEORGE'S COUNTY, MARYLAND

P-119580000\ENGINEER\ENVMR\ESD_04.sht Scale= 50 0000 ft / in User= DBickel PI Tdrv= PDE_Grey_150 pltfq Benth= TEXT SUB thl 2/1/2017 2:46:02 PM

APPENDIX D:

M-NCPPC Historic Preservation/Archeology Pre-Submittal Checklist for Development Applications



THE MARYLAND-NATIONAL CAPITAL PARK AND PLANNING COMMISSION

Prince George's County Planning Department
Historic Preservation Section

(301) 952-3680
www.mncppc.org

Historic Preservation/Archeology Pre-Submittal Checklist for Development Applications

Project Name: New Carrollton

Applicant's Name: New Carrollton Developer, LLC

Application Type: Preliminary Plan

Project Number (if applicable): PPS 4-16023

Contact/Agent: SOLTESZ, LLC

Phone/Fax: 301-794-7555

E-mail Address: (Young Roh)yroh@solteszco.com

Associated/Previous Project Numbers: _____

- Provide photographs of all standing structures or structural remains, such as foundations or man-made landscape features, on the property.
- Provide chain of title information on the property to at least 1900.
- Provide a list and location of any known historic resources or cemeteries on or adjacent to the property.

To be completed by Historic Preservation Section staff.

Required Information	Yes	No	N/A	Requirement for this Applicant
Photographs of all structures or structural remains			✓	If checked Yes or N/A, no further information needed.
Chain of title			✓	If checked Yes or N/A, no further information needed.
List of known historic resources and cemeteries			✓	If checked Yes or N/A, no further information needed.

Additional Information Required: This proposal will not affect any historic sites or resources or known archeological sites. Phase I archeology survey will not be recommended.

Jennifer Stabler 8/2/16
Historic Preservation Staff Signature Date

Jennifer Stabler
Historic Preservation Staff Name (printed)

301-952-5595; jennifer.stabler@ppd.mncppc.org
Historic Preservation Staff Phone and E-mail

APPENDIX E:
Preliminary Plan of Subdivision

GENERAL NOTES:

- EXISTING PROPERTY INFORMATION:
PARCEL A: PLAT BOOK 58-70
PARCEL B: PLAT BOOK 58-65
TAX PARCEL 122, L.14891 F.110
- TAX MAP: 51 & 52 GRID: F-2 & A1
- WSSC 200 FT REF: 206 NE07
- PURPOSE OF SUBDIVISION: MIXED USE DEVELOPMENT OF OFFICE, RETAIL, RESIDENTIAL, & HOTEL
- GFA EXISTING: 0 SF
GFA PROPOSED: 0 SF
TOTAL, 2,182,000 SF
MULTIFAMILY: 1,125,000 SF
OFFICE: 775,000 SF
RETAIL: 132,000 SF
HOTEL: 150,000 SF
- PRIOR APPROVALS: N/A
- GROSS ACREAGE: 31.29 AC. +/-
- NET ACREAGE: 18.46 AC.
- NET DEVELOPABLE OUTSIDE OF PMA: 18.06 AC. +/-
- ENVIRONMENTAL REGULATED FEATURES: 13.23 AC. +/-
- 100 YEAR FLOODPLAIN: 12.83 AC. +/-
- ROAD DEDICATION: 1.37 ACRES FOR PENNSY DRIVE & GARDEN CITY DRIVE
THE ACREAGE SHOWN IS APPROXIMATE
- REQUIRED DEDICATION:
A. GARDEN CITY DRIVE AT A MINIMUM OF 48.5 FEET TO A MAXIMUM OF 51 FEET FROM CENTER LINE, OR TOTAL RIGHT OF WAY RANGE OF 97'-102' FEET.
B. PENNSY DRIVE AT A MINIMUM OF 35 FEET TO A MAXIMUM OF 37 FEET FROM CENTER LINE, OR TOTAL RIGHT OF WAY RANGE OF 70'-74' FEET.
C. CORPORATE DRIVE AT A MINIMUM OF 48.5 FEET TO A MAXIMUM OF 51 FEET FROM CENTER LINE.
- EXISTING ZONING: MIXED USE TRANSPORTATION (M-X-T)
- SECTOR PLAN: APPROVED NEW CARROLLTON TDDP & DOZ
- PROPOSED USE: OFFICE, RETAIL, RESIDENTIAL, & HOTEL
- PROPOSED NUMBER OF LOTS: 0 LOTS
- PROPOSED NUMBER OF PARCELS: 12 PARCELS
- PROPOSED NUMBER OF OUTLOTS: 0 OUTLOT
- PROPOSED DWELLING UNIT TYPE: MULTIFAMILY

- DENSITY CALCULATION:
1125 DU/30.13 AC = 37.3 DU/AC
- MINIMUM LOT SIZE REQUIRED: N/A
- MINIMUM LOT WIDTH AT: N/A
- FRONT BLDG LINE: N/A
- FRONT STREET LINE: N/A
- SUSTAINABLE GROWTH TIER: YES, TIER 1
- (LEFT BLANK INTENTIONALLY)
- CENTER OR CORRIDOR LOCATION:
NEW CARROLLTON METRO METROPOLITAN CENTER.
- EXISTING GROSS FLOOR AREA TO REMAIN: 0.0 SF
- PROPOSED GROSS FLOOR AREA: 2,182,000 SF
- STORMWATER MANAGEMENT CONCEPT #38437-2016, APPROVAL DATE: 12-12-16
- WATER/SEWER CATEGORY DESIGNATION:
EXISTING: W-3 & S-3
PROPOSED: W-3 & S-3
- AVIATION POLICY AREA: N/A
- MANDATORY PARK DEDICATION WILL BE MET BY ON SITE FACILITIES.
RESIDENTIAL ACREAGE: 13.01 ACRES
- NO CEMETERIES EXIST ON OR CONTIGUOUS TO PROPERTY.
- NO HISTORIC SITES ON OR IN THE VICINITY OF THE PROPERTY.
- TYPE ONE CONSERVATION PLAN, PLAN# TCP-009-2016
- SITE IS NOT WITHIN CHESAPEAKE BAY CRITICAL AREA
- THERE ARE WETLANDS PRESENT ON SITE
- APPROXIMATELY 2,030 LF OF STREAM IS PRESENT ON SITE.
- NOT ADJACENT TO AN EASEMENT HELD BY THE MARYLAND ENVIRONMENTAL TRUST, THE MARYLAND AGRICULTURAL LAND PRESERVATION FOUNDATION, OR AIR TRUST ORGANIZATION.
- A 65 DBA LDN NOISE CONTROL CAN NOT BE SHOWN ON THE PLAN BECAUSE NOISE LEVELS ON SITE ARE HIGHER THAN 65 DBA LDN.
- AT THE TIME OF FINAL PLAT, THE APPLICANT AND THE APPLICANTS HEIRS, SUCCESSORS, AND/OR ASSIGNEES SHALL:
A. DEDICATE THE RIGHTS-OF-WAY ALONG THE PROPERTY'S STREET FRONTOAGE CONSISTENT WITH THE APPROVED PRELIMINARY PLAN OF SUBDIVISION OR AS MODIFIED BY THE APPROVED DETAILED SITE PLAN. DEDICATION OF RIGHT-OF-WAY SHALL OCCUR IN PHASE WITH THE PLATTING OF EACH PARCEL HAVING FRONTOAGE OR ACCESS ALONG GARDEN CITY DRIVE, PENNSY DRIVE AND CORPORATE DRIVE. THE PHASED RIGHT-OF-WAY DEDICATION SHALL HAVE NO IMPACT ON THE CURRENT OPERATION OF THESE ROADWAYS WHICH ARE CURRENTLY AND SHALL REMAIN OPEN TO TRAFFIC AND ARE NEEDED TO SUPPORT THE FINDINGS FOR ADEQUATE TRANSPORTATION FACILITIES FOR THE DEVELOPMENT.

EXISTING PARCELS

1'=100'


UNIT / USE TABLE					
	RESIDENTIAL # UNITS/SF	OFFICE SF	RETAIL SF	HOTEL # UNITS/SF	PARKING
PARCEL 1		200,000	2,000		1.45
PARCEL 2					2.2
PARCEL 3	250	250,000		10,000	2.35
PARCEL 4					BUS LOOP/PARK 5.86
PARCEL 5		100,000		10,000	0.86
PARCEL 6		150,000		20,000	1.17
PARCEL 7	265	285,000		60,000	250 150,000
PARCEL 8	165	185,000		10,000	2.52
PARCEL 9	165	185,000		5,000	2.86
PARCEL 10			50,000		4.49
PARCEL 11	240	240,000		10,000	2.51
PARCEL 12			275,000	5,000	2.04
DEDICATION					1.37
TOTAL	1,125	1,125,000	775,000	132,000	250 150,000
GRAND TOTAL:	2,182,000	SF			31.29

F.A.R. CALCULATIONS
SITE AREA: 31.29 AC. x 43.593 SF=1,362,992 SF.
F.A.R. PROPOSED

TOTAL 2,182,000 SF (1.60 F.A.R.)

NEW CARROLLTON PRELIMINARY PLAN OF SUBDIVISION PPS 4-16023

LANHAM (20th) ELECTION DISTRICT, PRINCE GEORGE'S COUNTY, MARYLAND

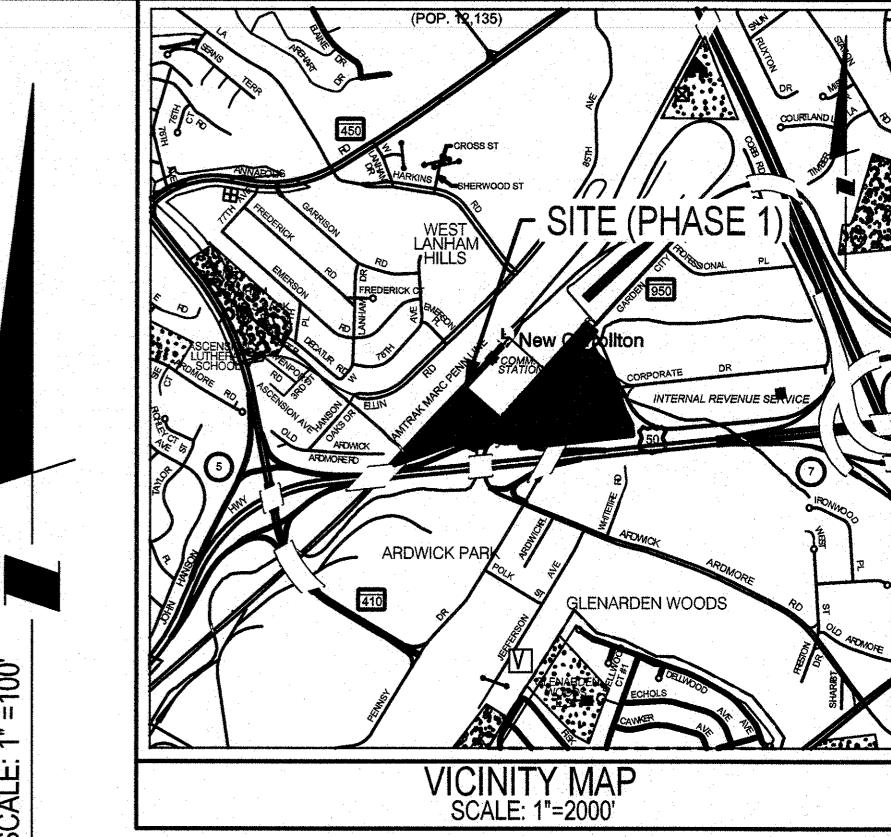

SCALE: 1'=100'

2

3

4

5


6

7

8

9

10

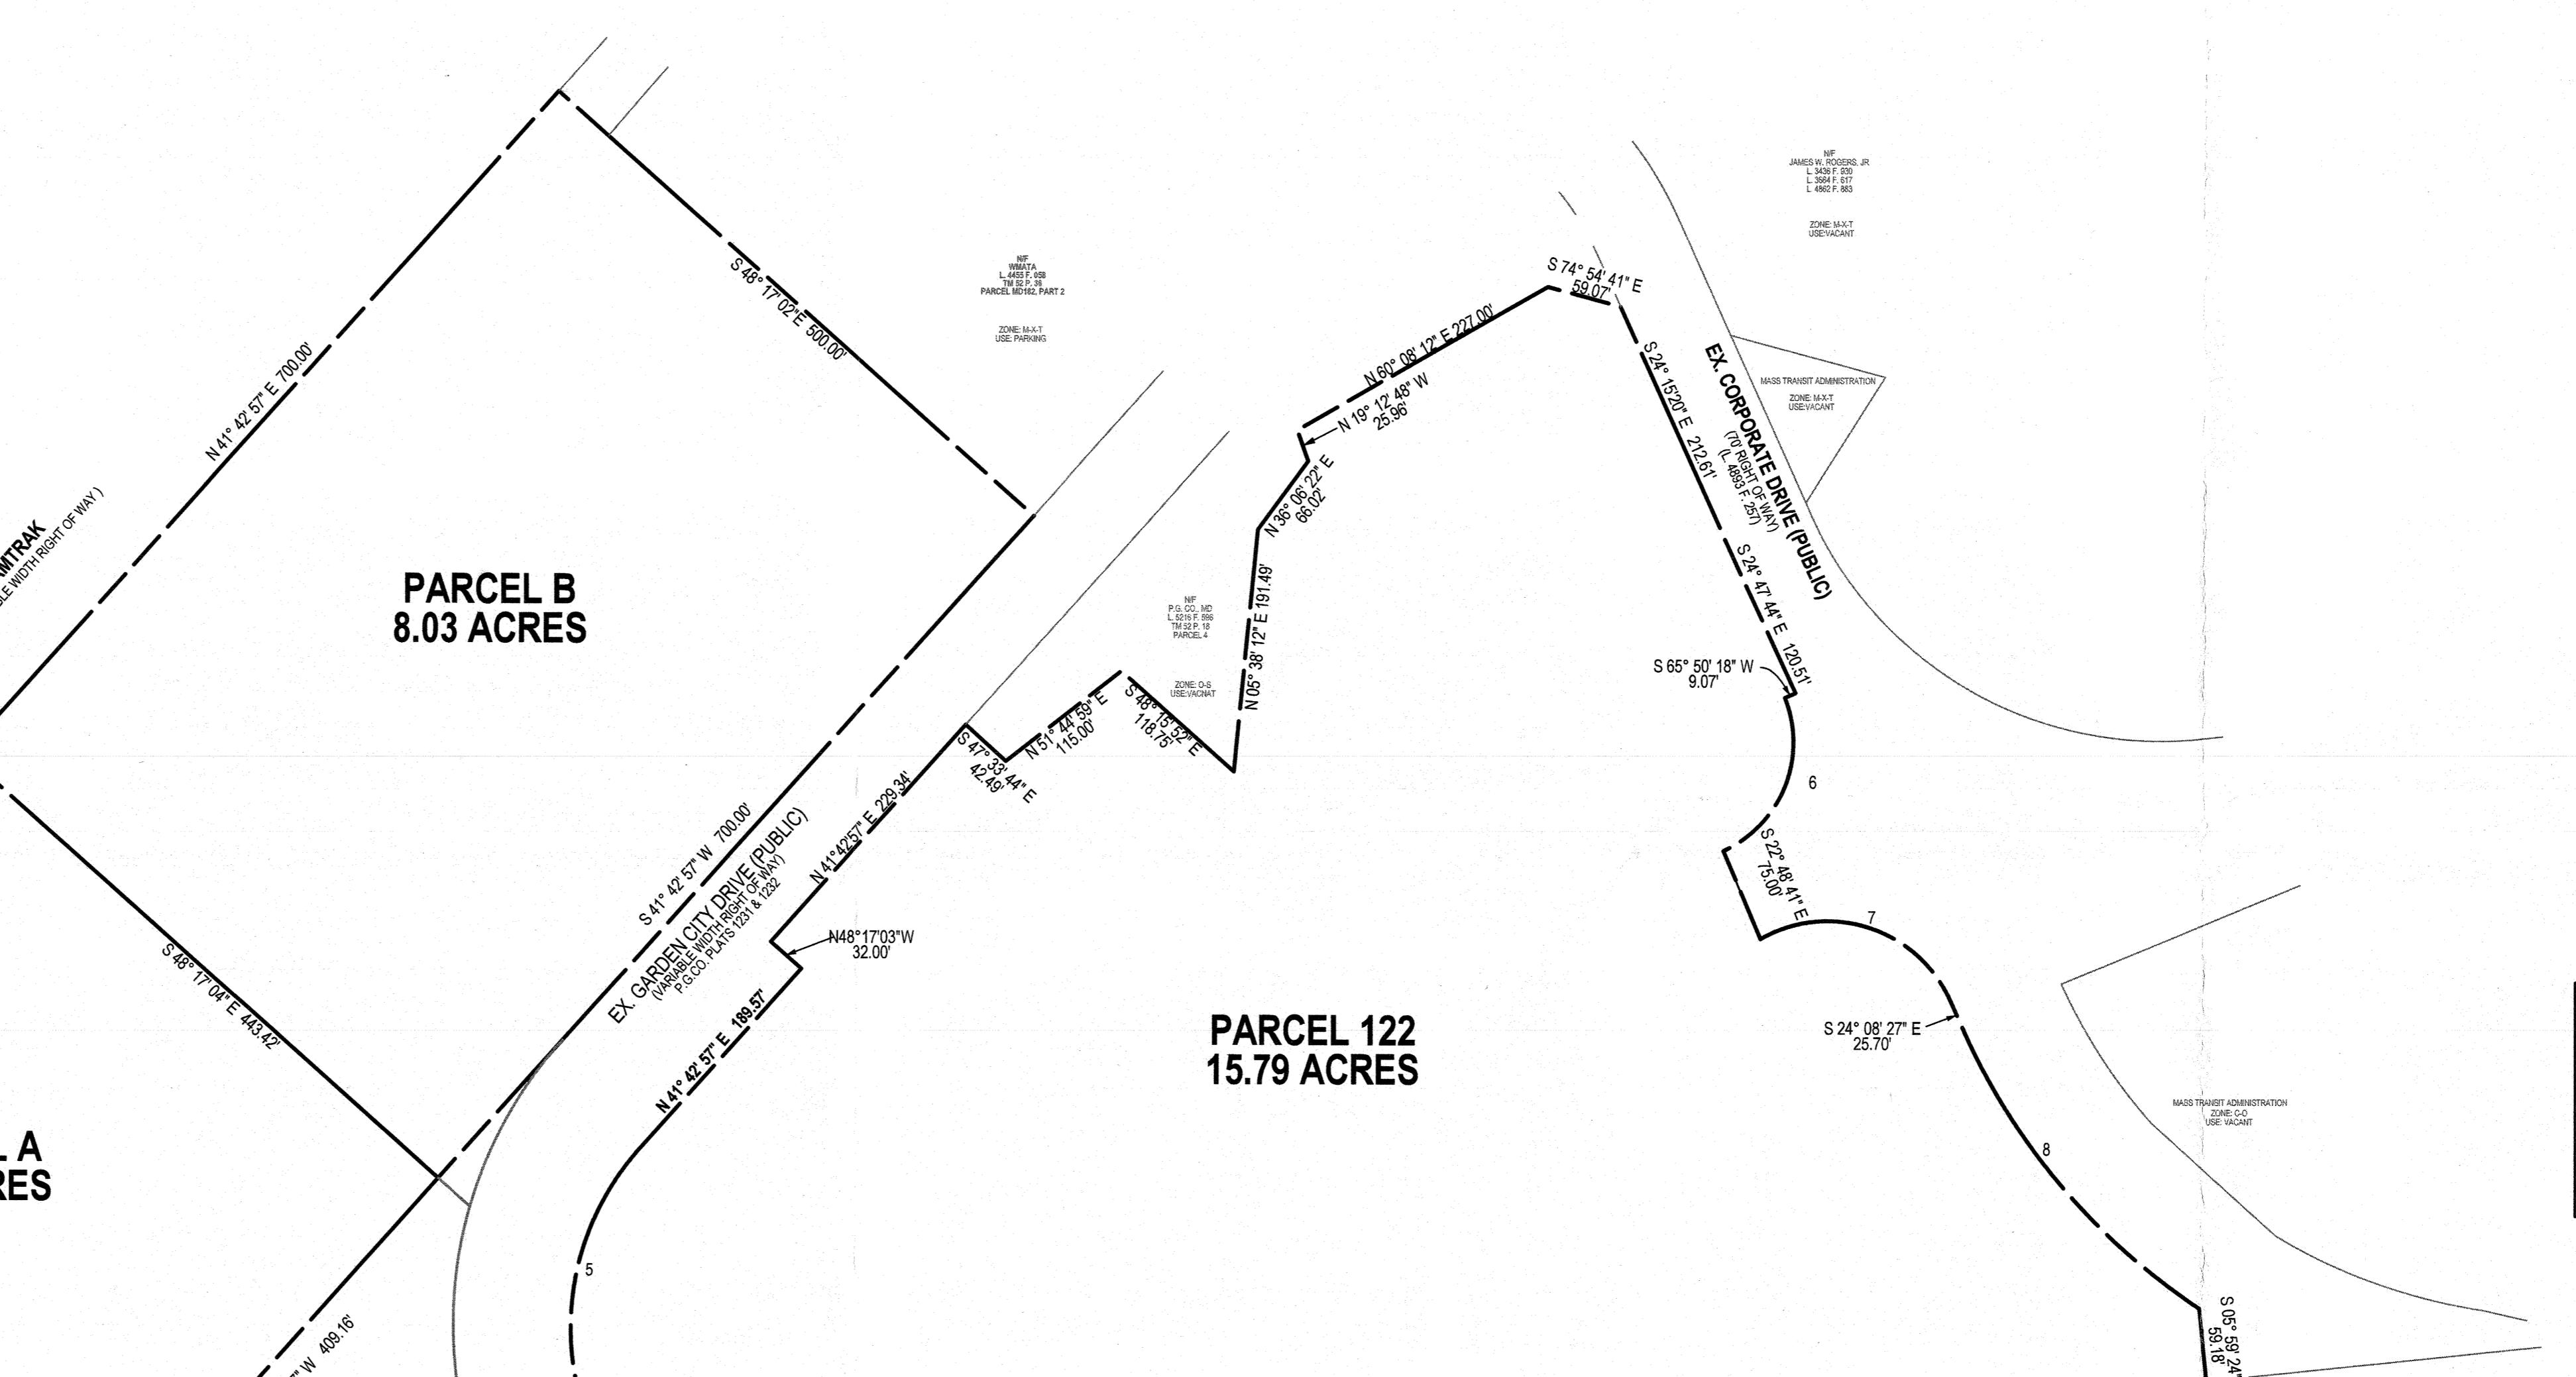

CURVE TABLE						
No.	Delta	Tangent	Arc	Radius	Chord	Chord Bearing
1	63°32'27"	155.43	278.34	250.98	264.29	N 81°43'31" W
2	10°36'37"	50.34	100.39	542.13	100.25	S 77°46'26" W
4	25°36'20"	43.40	65.36	191.00	64.65	N 18°51'06" W
5	47°42'54"	83.95	176.91	212.43	171.84	N 17°51'30" E
6	86°31'45"	68.41	143.47	95.00	130.22	S 21°42'09" W
7	96°02'55"	116.71	176.02	105.00	156.12	S 72°13'00" E
8	32°09'09"	149.34	250.80	516.22	287.00	S 40°13'00" E

EX. PROPERTY INFORMATION

SCALE: 1'=400'

PRELIMINARY PLAN TCP-100-116	
PLANNING BOARD ACTION: 1/21/2017	
PER PGCPB RESOLUTION:	
ADOPTION DATE: 3/21/2017	
SIGNATURE APPROVAL DATE: 3/3/2017	
AUTHORIZED SIGNATURE:	

THIS BLOCK IS FOR OFFICIAL USE ONLY OR relates to this plan and does not require approval by the Planning Board or its designee or the District Council.
M-NCPCC APPROVAL
PROJECT NAME: NEW CARROLLTON
PROJECT NUMBER: 4-16023
For Conditions of Approval see Site Plan Cover Sheet or Approval Sheet Revision numbers must be included in the Project Number

1'=100'
100 50 0 100 200
MISS UTILITY NOTE
PROFESSIONAL CERTIFICATION
I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND. MY LICENSE NUMBER IS M.D. REG. NO. #473 LICENSE EXPIRES: 6-27-17 EXPIRATION DATE: 6-27-17
OWNER/DEVELOPER/APPLICANT
WASHINGTON METRO AREA TRANSIT AUTHORITY 6TH AND D ST NW WASHINGTON, DC 20004
NEW CARROLLTON DEVELOPER LLC 7735 OLD GEORGETOWN ROAD SUITE 600 BETHESDA, MD 20814
MAP 13 GRID DS ES
TAX MAP 52, A1 ZONING CATEGORY: M-X-T
WSSC 200 SHEET XXXX
20NE07 XXXX
SITE DATUM HORIZONTAL: XXXXXX VERTICAL: XXXXX
STATE OF MARYLAND DEPARTMENT OF PLANNING DEPARTMENT OF PLANNING FEB 28 2017 DEVELOPMENT REVIEW DIVISION LANHAM (20th) ELECTION DISTRICT, PRINCE GEORGE'S COUNTY, MARYLAND
PRELIMINARY PLAN OF SUBDIVISION NEW CARROLLTON PPS 4-16023
100' 100' 100' 100'

SOLTESZ, LLC

Engineering
Surveying
Planning
Environmental Sciences
4300 Forbes Boulevard, Suite 230
Lanham, MD 20706
P. 301.794.7555 F. 301.794.7656
www.solteszco.com

REVISIONS
BY DATE
DESIGNED: JUNE 2016
TECHNICIAN: YOR
CHECKED: DUB

NO.
REVISIONS
BY DATE
DESIGNED: JUNE 2016
TECHNICIAN: YOR
CHECKED: DUB

NO.
REVISIONS
BY DATE
DESIGNED: JUNE 2016
TECHNICIAN: YOR
CHECKED: DUB

NO.
REVISIONS
BY DATE
DESIGNED: JUNE 2016
TECHNICIAN: YOR
CHECKED: DUB

NO.
REVISIONS
BY DATE
DESIGNED: JUNE 2016
TECHNICIAN: YOR
CHECKED: DUB

NO.
REVISIONS
BY DATE
DESIGNED: JUNE 2016
TECHNICIAN: YOR
CHECKED: DUB

NO.
REVISIONS
BY DATE
DESIGNED: JUNE 2016
TECHNICIAN: YOR
CHECKED: DUB

NO.
REVISIONS
BY DATE
DESIGNED: JUNE 2016
TECHNICIAN: YOR
CHECKED: DUB

NO.
REVISIONS
BY DATE
DESIGNED: JUNE 2016
TECHNICIAN: YOR
CHECKED: DUB

NO.
REVISIONS
BY DATE
DESIGNED: JUNE 2016
TECHNICIAN: YOR
CHECKED: DUB

NO.
REVISIONS
BY DATE
DESIGNED: JUNE 2016
TECHNICIAN: YOR
CHECKED: DUB

NO.
REVISIONS
BY DATE
DESIGNED: JUNE 2016
TECHNICIAN: YOR
CHECKED: DUB

NO.
REVISIONS
BY DATE
DESIGNED: JUNE 2016
TECHNICIAN: YOR
CHECKED: DUB

NO.
REVISIONS
BY DATE
DESIGNED: JUNE 2016
TECHNICIAN: YOR
CHECKED: DUB

NO.
REVISIONS
BY DATE
DESIGNED: JUNE 2016
TECHNICIAN: YOR
CHECKED: DUB

NO.
REVISIONS
BY DATE
DESIGNED: JUNE 2016
TECHNICIAN: YOR
CHECKED: DUB

NO.
REVISIONS
BY DATE
DESIGNED: JUNE 2016
TECHNICIAN: YOR
CHECKED: DUB

NO.
REVISIONS
BY DATE
DESIGNED: JUNE 2016
TECHNICIAN: YOR
CHECKED: DUB

NO.
REVISIONS
BY DATE
DESIGNED: JUNE 2016
TECHNICIAN: YOR
CHECKED: DUB

NO.
REVISIONS
BY DATE
DESIGNED: JUNE 2016
TECHNICIAN: YOR
CHECKED: DUB

NO.
REVISIONS
BY DATE
DESIGNED: JUNE 2016
TECHNICIAN: YOR
CHECKED: DUB


NO.
REVISIONS
BY DATE
DESIGNED: JUNE 2016
TECHNICIAN: YOR
CHECKED: DUB

NO.
REVISIONS
BY DATE
DESIGNED: JUNE 2016
TECHNICIAN: YOR
CHECKED: DUB

NO.
REVISIONS
BY DATE
DESIGNED: JUNE 2016
TECHNICIAN: YOR
CHECKED: DUB

NO.
REVISIONS
BY DATE
DESIGNED: JUNE 2016
TECHNICIAN: YOR
CHECKED: DUB

NO.
REVISIONS

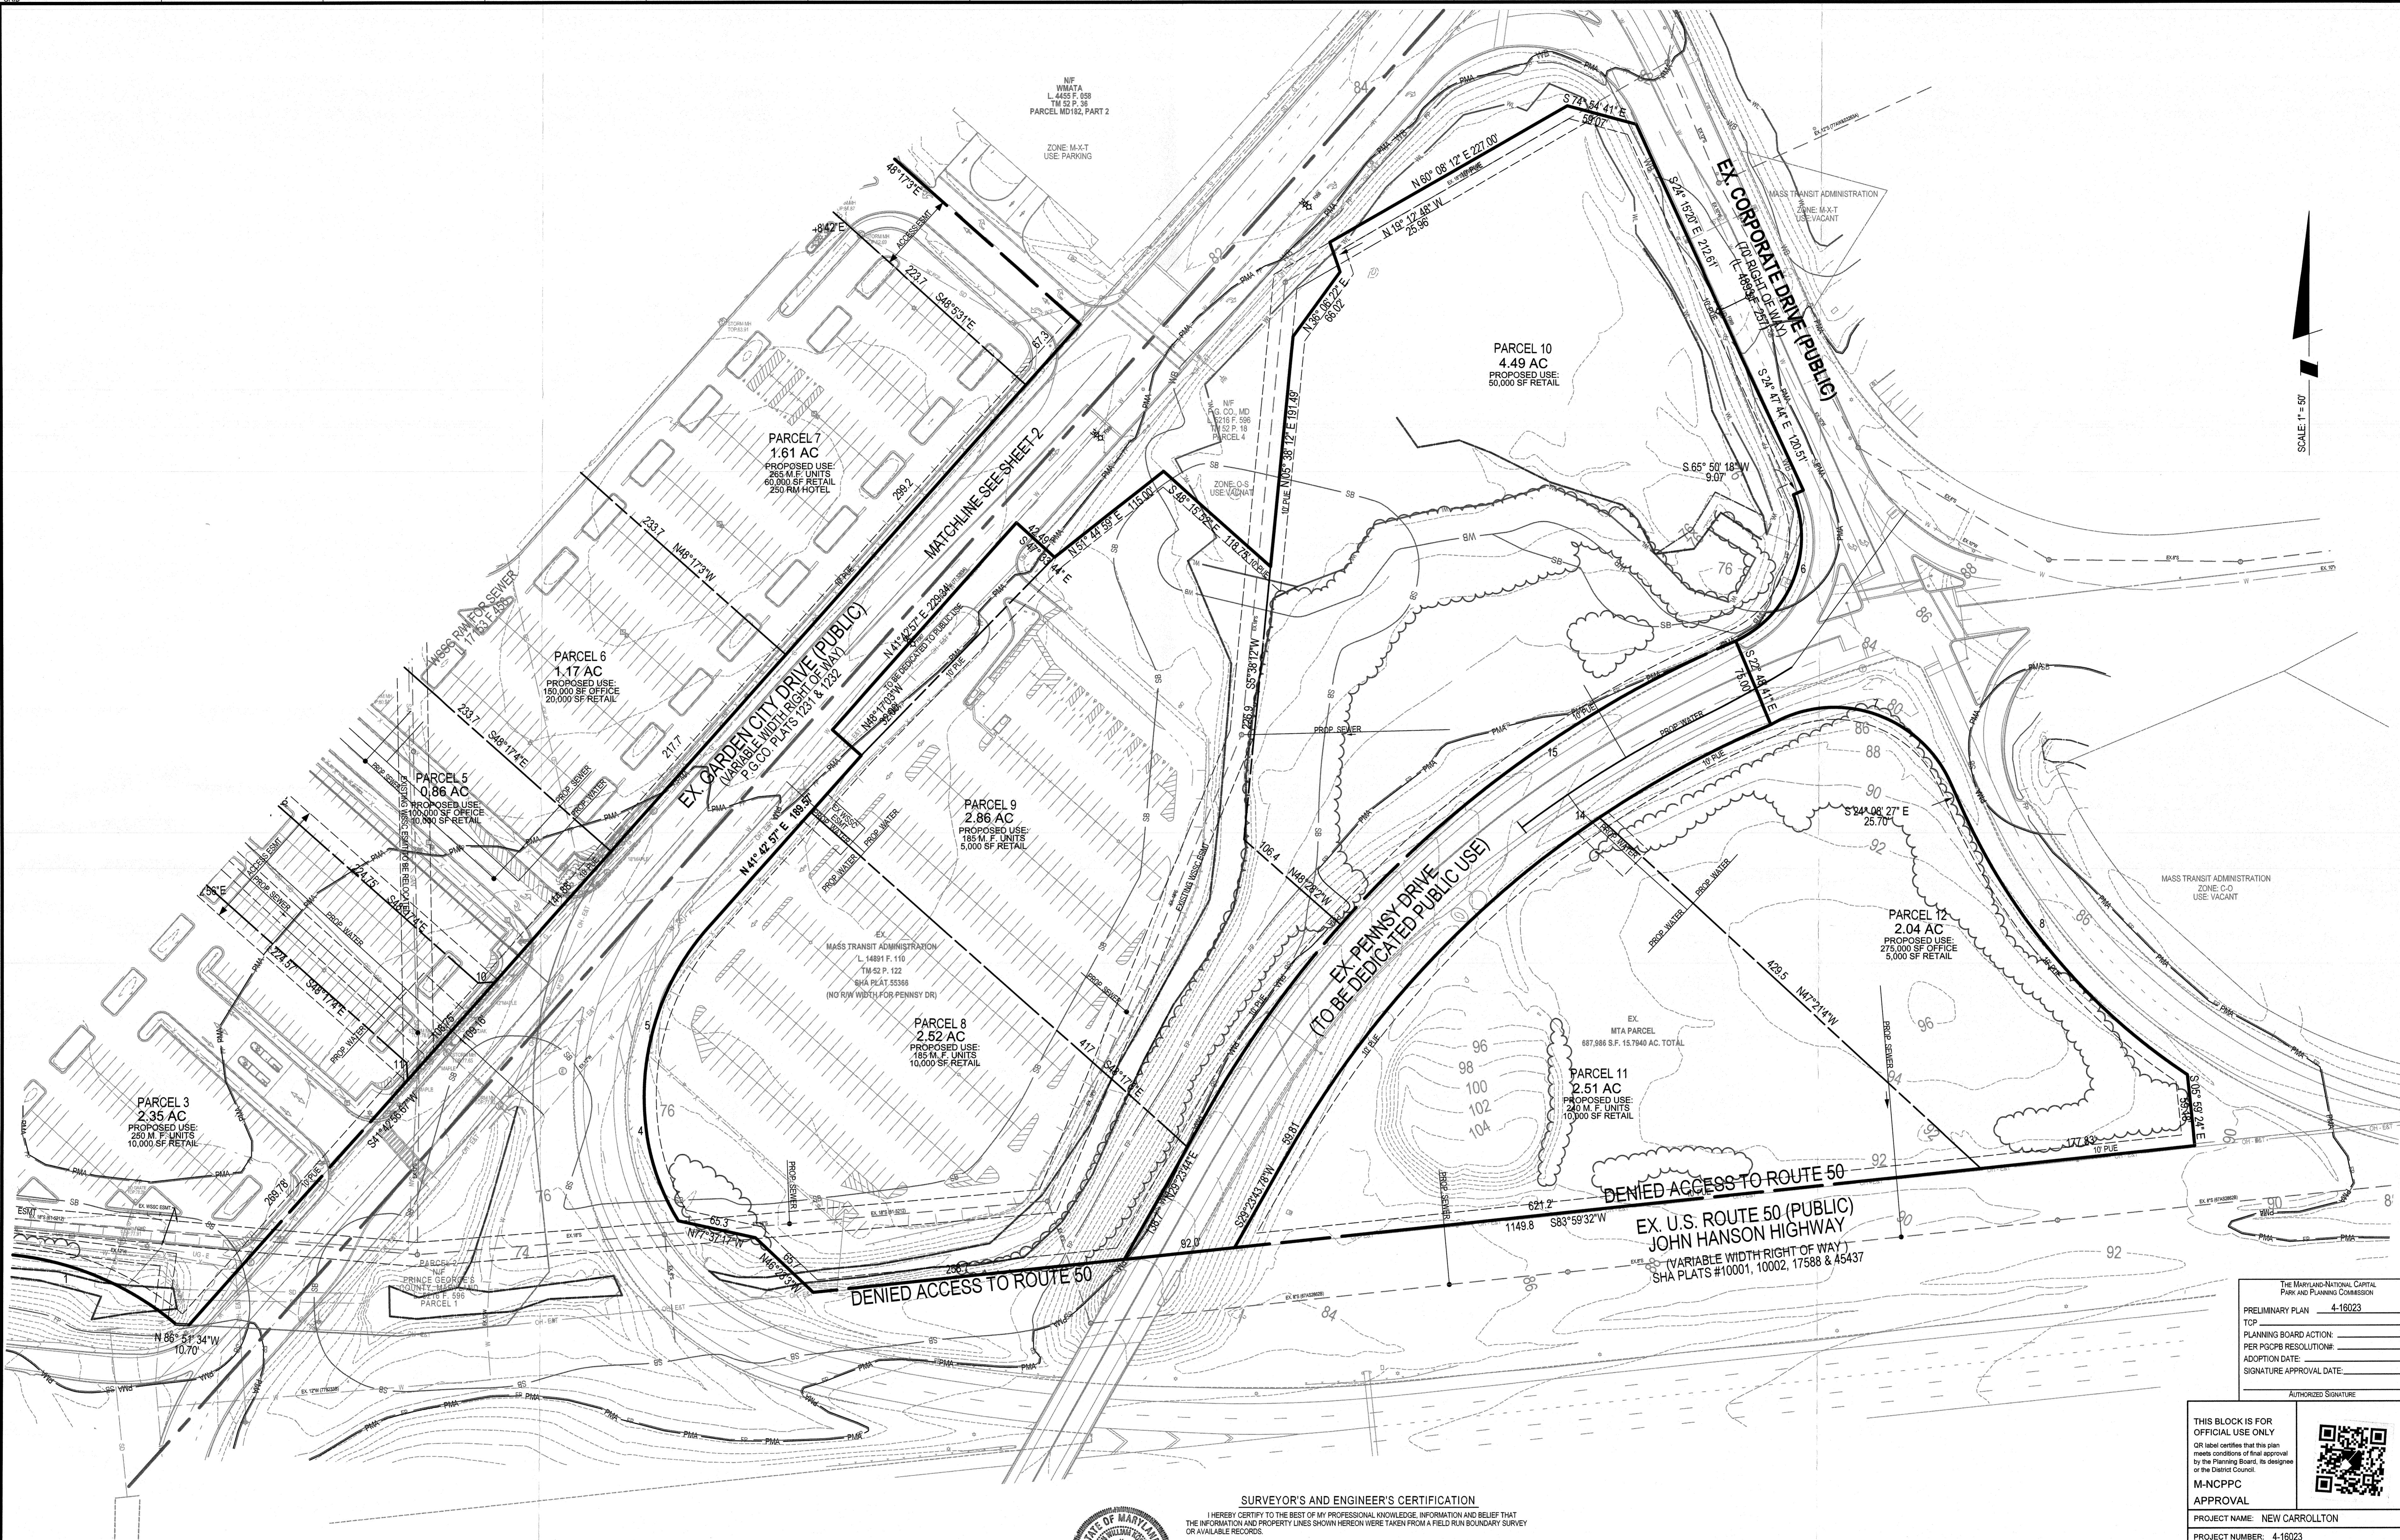

I HEREBY CERTIFY TO THE BEST OF MY PROFESSIONAL KNOWLEDGE, INFORMATION AND BELIEF THAT THE INFORMATION AND PROPERTY LINES SHOWN HEREON WERE TAKEN FROM A FIELD RUN BOUNDARY SURVEY FOR CONDITIONS AS OF 2-27-17.

[Signature] 2-27-17
JOHN W. KOSTIC, DATE
PROPERTY LINE SURVEYOR
MD REG. NO. 479
LICENSE EXPIRES: 1-17-18

[Signature] 2-27-17
PROFESSIONAL ENGINEER, DATE
MD REG. NO. 4494
LICENSE EXPIRES: 4-27-17

PROFESSIONAL CERTIFICATION
I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND.
LICENSURE NO. 10-638 EXPIRATION DATE: 6-21-17

50 25 0 50 100

PRELIMINARY PLAN OF SUBDIVISION

NEW CARROLLTON
PPS 4-16023

LANHAM (20th) ELECTION DISTRICT, PRINCE GEORGE'S COUNTY, MARYLAND



SOLTESZ, LLC


Engineering
Surveying
Planning
Environmental Sciences
4300 Forbes Boulevard, Suite 230
Lanham, MD 20706
P. 301.794.7555 F. 301.794.7656

NO.	REVISIONS	BY DATE
DATE: JUNE 2016	CAD STANDARDS VERSION: V8 - 2010	
DESIGNED: YOR	TECHNICIAN: YOR	CHECKED: DJB

MISS UTILITY NOTE
INFORMATION CONCERNING EXISTING UNDERGROUND UTILITIES WAS OBTAINED FROM MARYLAND RECORDS. THE CONTRACTOR MUST DETERMINE THE EXACT LOCATION AND ELEVATION OF ALL UTILITIES. THE CONTRACTOR IS RESPONSIBLE FOR LOCATING UTILITIES BY HAND, WELL IN ADVANCE OF THE START OF EXCAVATION. CONTACT MISS UTILITY AT 1-800-257-7777, 48 HOURS PRIOR TO EXCAVATION. DO NOT EXCAVATE ANY LINE SHOWN ON THIS PLAN OR WITHIN 15 INCHES, WHICHEVER IS LESS. CONTACT THE OWNER OR THE CONTRACTOR IF ANY WORK IS BEING CONDUCTED NEAR EXCAVATION. CLEARANCES LESS THAN NOTED MAY REQUIRE REVISIONS TO THIS PLAN.

OWNER/DEVELOPER/APPLICANT
WASHINGTON METRO AREA TRANSIT AUTHORITY
6TH AND D ST NW
WASHINGTON, DC 20004
MASS TRANSIT AUTHORITY
6 ST. PLACE, SUITE 1204
BALTIMORE, MD 21202

MAP 13 GRID DS E5
TAX MAP 52, A1 ZONING CATEGORY: M-X-T
WSC 200' SHEET XXXXX
20NE07 XXXXX
SITE DATUM XXXXX
HORIZONTAL XXXXX VERTICAL XXXXX

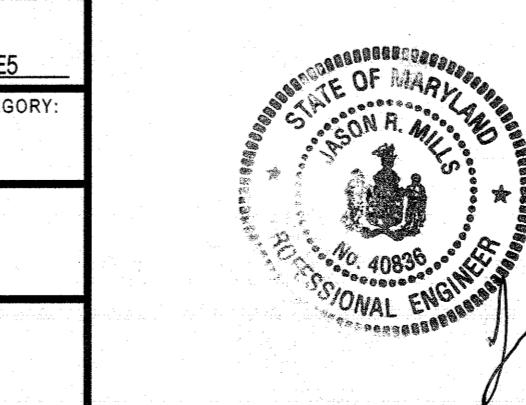

[Signature] 2-27-17
JOSH R. MILLS, DATE
PROFESSIONAL ENGINEER
MD REG. NO. 40298
LICENSE EXPIRES: 6-21-17

1" = 50'
SHEET 3
OF 3
PROJECT NO. 1958-00-00

APPENDIX F:
USFWS Online Certification Letter

**United States Department of the Interior**

U.S. Fish & Wildlife Service
Chesapeake Bay Field Office
177 Admiral Cochrane Drive
Annapolis, MD 21401
410/573 4575

**Online Certification Letter**

Today's date: _____

Project: New Carrollton Development

Dear Applicant for online certification:

Thank you for using the U.S. Fish and Wildlife Service (Service) Chesapeake Bay Field Office online project review process. By printing this letter in conjunction with your project review package, you are certifying that you have completed the online project review process for the referenced project in accordance with all instructions provided, using the best available information to reach your conclusions. This letter, and the enclosed project review package, completes the review of your project in accordance with the Endangered Species Act of 1973 (16 U.S.C. 1531-1544, 87 Stat. 884), as amended (ESA). This letter also provides information for your project review under the National Environmental Policy Act of 1969 (P.L. 91-190, 42 U.S.C. 4321-4347, 83 Stat. 852), as amended. A copy of this letter and the project review package must be submitted to this office for this certification to be valid. This letter and the project review package will be maintained in our records.

Based on this information and in accordance with section 7 of the Endangered Species Act (87 Stat. 884, as amended; 16 U.S.C. 1531 et seq.), we certify that except for occasional transient individuals, no federally proposed or listed endangered or threatened species are known to exist within the project area. Therefore, no Biological Assessment or further section 7 consultation with the U.S. Fish and Wildlife Service is required. Should project plans change, or if additional information on the distribution of listed or proposed species becomes available, this determination may be reconsidered.

This response relates only to federally protected threatened or endangered species under our jurisdiction. For additional information on threatened or endangered species in Maryland, you should contact the Maryland Wildlife and Heritage Division at (410) 260-8573. For information in Delaware you should contact the Delaware Division of Fish and Wildlife, Wildlife Species Conservation and Research Program at (302) 735-8658. For information in the District of Columbia, you should contact the National Park Service at (202) 339-8309.

The U.S. Fish and Wildlife Service also works with other Federal agencies and states to minimize loss of wetlands, reduce impacts to fish and migratory birds, including bald eagles, and restore habitat for wildlife. Information on these conservation issues and how development projects can avoid affecting these resources can be found on our website (www.fws.gov/chesapeakebay)

We appreciate the opportunity to provide information relative to fish and wildlife issues, and thank you for your interest in these resources. If you have any questions or need further assistance, please contact Chesapeake Bay Field Office Threatened and Endangered Species program at (410) 573-4527.

Sincerely,

Genevieve LaRouche
Field Supervisor

APPENDIX G:

Vibration Analysis



1 November 2016
(Originally Dated 1 August 2016)

Phoenix Noise & Vibration, LLC
5216 Chairmans Court, Suite 107
Frederick, Maryland 21703
301.846.4227 (phone)
301.846.4355 (fax)
www.phoenixnv.com

Alan Lederman
Development Partner
Urban Atlantic Development
7735 Old Georgetown Road, Suite 600
Bethesda, Maryland 20814

Reference: New Carrollton Metro Site
Vibration Analysis Results
Project No. UAD1601

Dear Mr. Lederman:

Phoenix Noise & Vibration has conducted an analysis of ground-borne vibration levels at the New Carrollton Metro Site in Prince George's County, Maryland. This was an analysis of vibration levels generated by Metro, Amtrak, Acela, MARC, and freight trains as measured under current site conditions, evaluated according to typically accepted levels for non-residential and residential building occupancy.

Under the current conceptual site plan design, ground-borne vibration levels generated by usage of the existing rail lines are in compliance with Federal Transit Administration guidelines for railway vibration impact upon residential and non-residential buildings. Furthermore, while an occasional train may generate vibration which is "feelable" within a building and, depending upon the sensitivity of the individual, perceived as annoying by a small percentage of building occupants, the vibration levels at the site will not result in structural damage.

SITE DESCRIPTION

Under the current conceptual site plan, the New Carrollton Metro site will include new development on both the north and south of the existing rail lines which serve the New Carrollton Metro Station and Amtrak/MARC station. The New Carrollton train stations include five railway tracks: three tracks used by Amtrak, Amtrak Acela, and MARC commuter trains and CSX and Norfolk & Southern freight trains, and two tracks used only by Metro trains. The New Carrollton Metro station is the last stop on the Orange line.

The current conceptual site plan (see enclosed Drawing 1) includes residential, hotel, office, and retail buildings. Table 1 presents the proposed building uses closest to both sets of railway tracks.

Table 1: New Carrollton Metro Site proposed building layout relative to existing railway tracks.

Railway Track	Closest Building Use to Railway Track	Approximate Distance (feet) to Closest Track
Amtrak/MARC/Freight	Residential/Retail	110
	Office/Retail	110
Metro	Residential/Retail	140
	Office/Retail	25

VIBRATION IMPACT CRITERIA

Prince George's County does not currently have a limit for ground-borne vibration levels as measured in residential, hotel, office, or retail structures; therefore the measured ground-borne vibration levels have been evaluated according to the Federal Transit Administration's (FTA) *Transit Noise and Vibration Impact Assessment* (May 2006). Table 8-1 of this document (enclosed, along with FTA Land Use Category definitions) specifies impact levels for various building types. The impact levels for ground-borne vibration applicable to the building uses proposed for the New Carrollton Metro site are shown in Table 2.

Table 2: Ground-borne vibration impact criteria for general assessment of various buildings.

Land Use Category	Event Type	Number of Vibration Events (per day)	GBV Impact Levels (VdB re 1 micro-inch/sec)
Category 2: Residences and buildings where people normally sleep.	Frequent	> 70	72
	Occasional	30 - 70	75
	Infrequent	< 30	80
Category 3: Institutional land uses with primarily daytime use.	Frequent	> 70	75
	Occasional	30 - 70	78
	Infrequent	< 30	83

These impact levels apply to frequencies from 8 to 80 Hz and are intended to be applied to vibration events lasting less than 10 seconds, such as those typical of commuter rail transit systems (Amtrak, MARC, and Metro trains); however, since no specific impact criteria exist for freight trains, these same impact levels may also be used for freight trains.¹ For a building to be considered impacted by ground-borne vibration, it must experience the number of vibration events within the table at a level equal to or greater than the presented impact level for that event type. For example, for a residential building, a "frequent" event type must have at least 70 vibration events within a day at a level equal to or greater than 72 VdB (re 1 micro-inch/sec) to be considered vibration impact upon a residential building.

¹ See Section 8.1.3: Application to Freight Trains, Page 8-5 of FTA's *Transit Noise and Vibration Impact Assessment* (May 2006).

It should be noted that the FTA describes a ground-borne vibration level of 72 VdB subjectively as “not feelable, but ground-borne vibration may be audible inside quiet rooms.” Additionally, a level of 65 VdB is the threshold for human perception and subjectively characterized as “barely perceptible” by most people, while 75 VdB is the level at which the majority of people consider vibration “distinctly perceptible.”²

The vibration impact criteria outlined in the FTA document are not necessarily standardized limits, but rather “a good foundation for predicting annoyance from ground-borne noise and vibration in residential areas as well as interference with vibration-sensitive activities.” Furthermore, these are not values which produce any kind of structural damage, as the vibration levels required to do so are much higher.

As the FTA states that “it is extremely rare for vibration from train operations to cause any sort of building damage, even minor cosmetic damage,” the limits shown in Table 2 are the ground-borne vibration levels which have been found to correlate well in predicting the threshold at which the majority of people exposed to that level will result in “human annoyance.”

VIBRATION MEASUREMENTS

Phoenix Noise & Vibration conducted two 24-hour on-site vibration measurements to determine existing ground-borne railway vibration levels at the properties directly adjacent to the New Carrollton train stations. Measurements were made using PCB low noise accelerometers and a Sinus Harmonie multichannel frequency analyzer coupled with a laptop computer. All accelerometers were calibrated prior to the survey traceable to National Institute of Standards and Technology (NIST). Accelerometers were magnetically mounted on 18-inch steel spikes driven into the ground approximately 16 inches at each measurement location. The steel spikes were used to provide adequate coupling to the ground-borne vibration.

Vibration measurements were made at the four locations shown on enclosed Drawing 1. Measurement locations were chosen to represent those proposed buildings closest to the two sets of railway tracks under the current conceptual site plan. Ground-borne vibration levels at each location were measured in the vertical direction (z-axis). Each of the four accelerometers recorded the maximum amplitude (i.e. highest vibration level) generated over the duration of a railway event. At each location, a vibration threshold was set so that data was only recorded if a railway event exceeded that threshold. The threshold level was set such that vibration generated by a railway event would exceed the level, yet other events typical of the surroundings (e.g. people walking, cars driving in the parking lot, etc.) would not.

Vibration measurement results are summarized in Table 3 and presented graphically on enclosed Figures 1 through 4. Given that the sites are adjacent to commuter rail lines with vibration “events” (i.e. a train passing the site) easily exceeding 70 in a 24-hour period (note the number of recorded vibration events in Table 3), the more restrictive FTA “frequent” vibration impact criteria has been used to evaluate the measured ground-borne vibration levels.

² *Transit Noise and Vibration Impact Assessment* (May 2006), Chapter 7: Basic Ground-Borne Vibration Concepts.

Recall that to have vibration impact upon a building when there are at least 70 vibration events in a 24-hour period (“frequent” criteria), there must be at least 70 vibration events which exceed the criteria level (72 VdB for residential, 75 VdB for non-residential). Note that at Point A there were 42 train events which exceeded the non-residential level, well below the 70 required for vibration impact. At Points B and C, no train events exceeded either vibration criteria, while at Point D one train event exceeded both vibration criteria.

Table 3: New Carrollton Metro Site measured ground-borne vibration levels relative to FTA criteria.

Vibration Measurement Location	Measurement Date	Number of Vibration Events Recorded in 24-Hour Period	Number of Vibration Events Which Exceeded FTA “Frequent” Criteria Level		Vibration Impact According to FTA Criteria
			Residential (72 VdB)	Non-Residential (75 VdB)	
A	July 6 – 7, 2016	277	N/A	42	No
B			0	0	No
C			0	0	No
D	June 29 – 30, 2016	144	1	1	No

Also note on Figures 1 through 4 that all measured vibration levels are well below the threshold for even minor cosmetic damage in fragile buildings (100 VdB),³ including those generated by the very few train events which resulted in the highest measured levels near 80 VdB at Points A and D. It is important to note that this is the threshold for minor cosmetic damage, not structural damage, which occurs at a much higher level of ground-borne vibration.

PURPLE LINE

The Purple Line is a light rail public transit system proposed to open in 2022 which will extend 16 miles between New Carrollton in Prince George’s County and Bethesda in Montgomery County, providing connections between Metro stations throughout the area. The New Carrollton Purple Line station will be the end of the line, and located north of the existing Amtrak/MARC station which divides the two sections of the New Carrollton Metro Site development (shown on enclosed Drawing 1). The currently shown office and residential buildings on this portion of the site will be north of the Purple Line station and approximately 30 feet from the section of track that extends past the station. It is assumed this section of track is more of a storage yard (similar to the Metro storage yard across the racks for the end of the Orange Line) rather than track that will have trains traveling on it at speed.

Projected vibration impact from the Purple Line was addressed in the Final Environmental Impact Statement (FEIS),⁴ which calculated vibration levels at various locations along the rail line. The closest location to the New Carrollton Metro Site for which the FEIS calculated a

³ According to Figure 7-3: Typical Levels of Ground-Borne Vibration of FTA’s *Transit Noise and Vibration Impact Assessment* (May 2006).

⁴ Entitled *Vibration Technical Report*, dated August 2013. Developed by Environmental Acoustics, Inc.

Purple Line vibration level is 4100 Hanson Oaks Drive, approximately 2,300 feet east of the New Carrollton Purple Line station as measured along the tracks. The FEIS projected a vibration level of 65 VdB (frequency not specified) at this location, which is approximately 110 feet from the track centerline. The vibration level projected at 4100 Hanson Oaks Drive cannot be used to accurately determine the expected vibration at the New Carrollton Metro Site due to the difference in track use between the two locations (active section of the future track versus a storage yard).

Since the Purple Line is not yet constructed, the vibration level at the site from the rail line cannot be measured; however given that the section of track closest to the New Carrollton Metro Site development is past the station, it is assumed that the vibration output would be low relative to the vibration generated by the other existing rail lines, such that while the Purple Line may generate vibration near the New Carrollton station, it will not be at a level which will be above the vibration produced by the existing activity on the Amtrak/MARC/freight and Metro lines. This is supported by the projected vibration level calculated at the closest location included in the FEIS (65 VdB at 110 feet from the centerline). Furthermore, the Purple Line is a light rail system, with trains which should generate much lower levels of vibration than the existing and heavier Amtrak, MARC, and freight trains.

CONCLUSION

Ground-borne vibration levels at the existing New Carrollton Metro Site due to the existing rail lines are well below the “frequent” events FTA criteria for vibration impact upon residential and non-residential buildings. Existing vibration levels will not result in structural damage; however an occasional train may generate vibration levels which may cause slight annoyance due to “feelable” vibration within the building. Since this is a subjective evaluation, the level of annoyance experienced will depend highly upon the tolerance of each individual; i.e. one resident may object to the vibration felt during a Metro train pass-by while the neighboring resident may not.

These results apply only to the site conditions present at the time of the measurements, and may change once the site has been developed. Stated differently, once the site has been re-graded and buildings have been added, the soil compaction and ground characteristics may be altered and produce different vibration levels. Likewise, vibration levels on different floors of the townhomes may be higher than those measured in the ground, as structures can amplify vibration levels such that vibration will increase with building height.




If you have any questions, feel free to contact me directly.

Sincerely,




Josh Curley
Senior Engineer

Encl: Drawing 1: New Carrollton Metro Site Vibration Measurement Locations
Figure 1: Measured vibration levels over a 24-hour period at Location A.
Figure 2: Measured vibration levels over a 24-hour period at Location B.
Figure 3: Measured vibration levels over a 24-hour period at Location C.
Figure 4: Measured vibration levels over a 24-hour period at Location D.
Pages 8-2 and 8-3 from the FTA’s *Transit Noise and Vibration Impact Assessment* (May 2006).

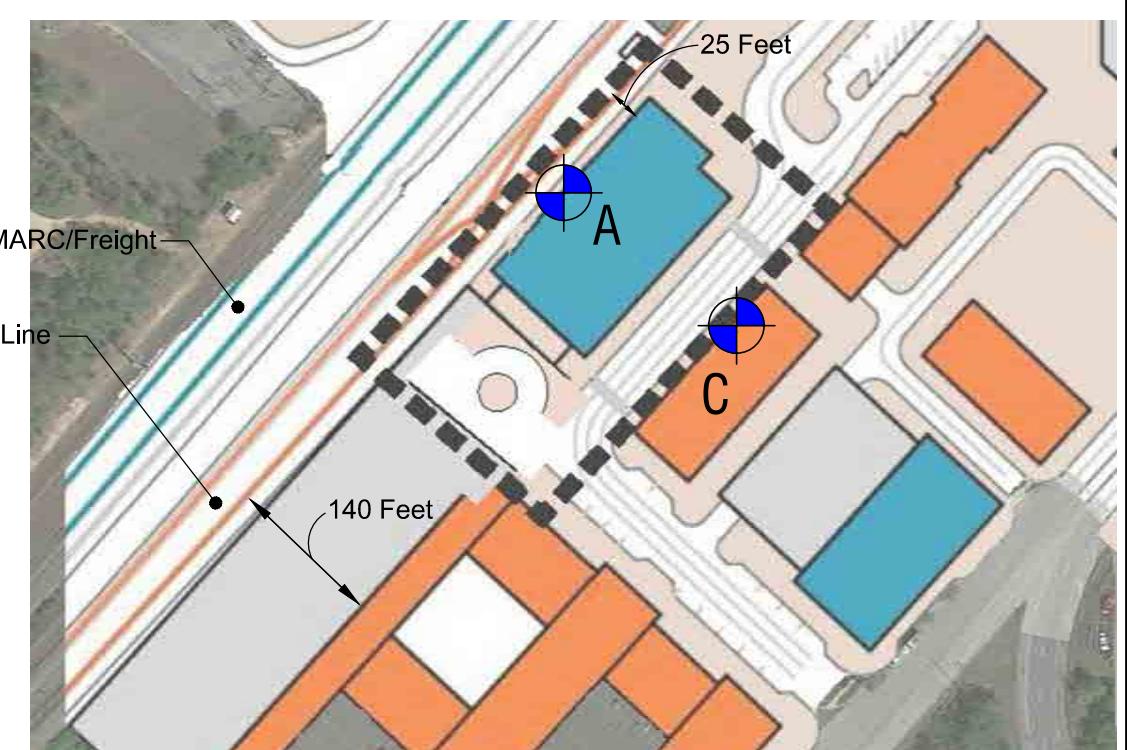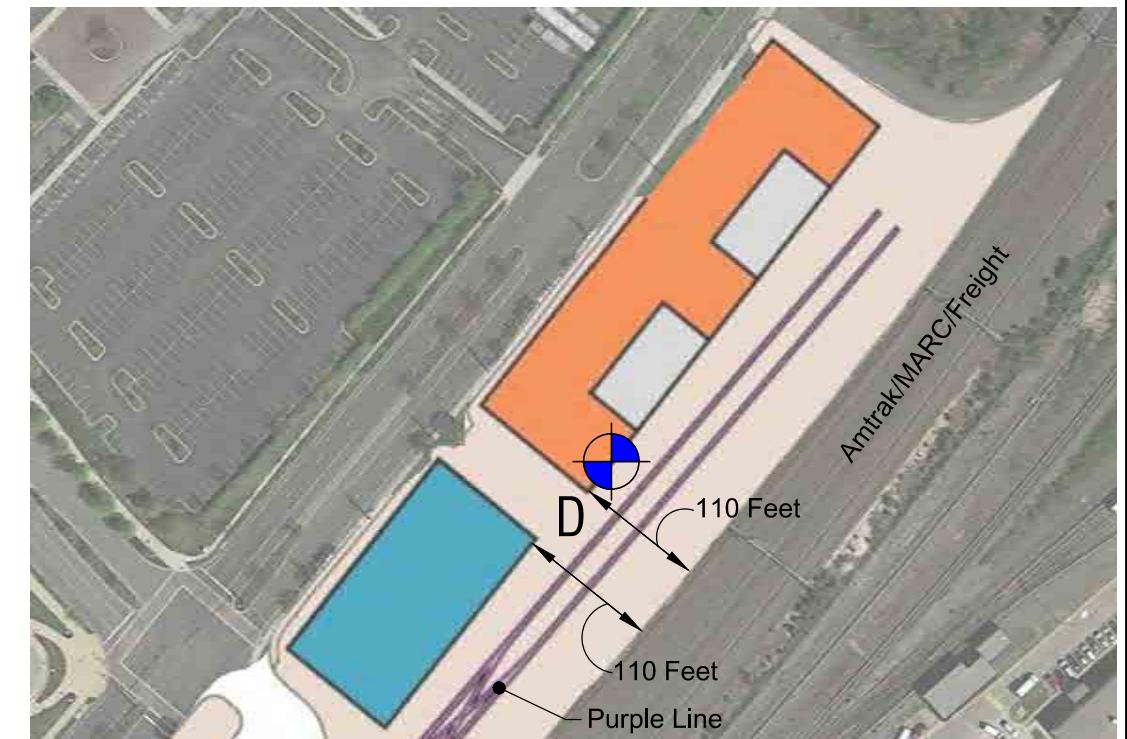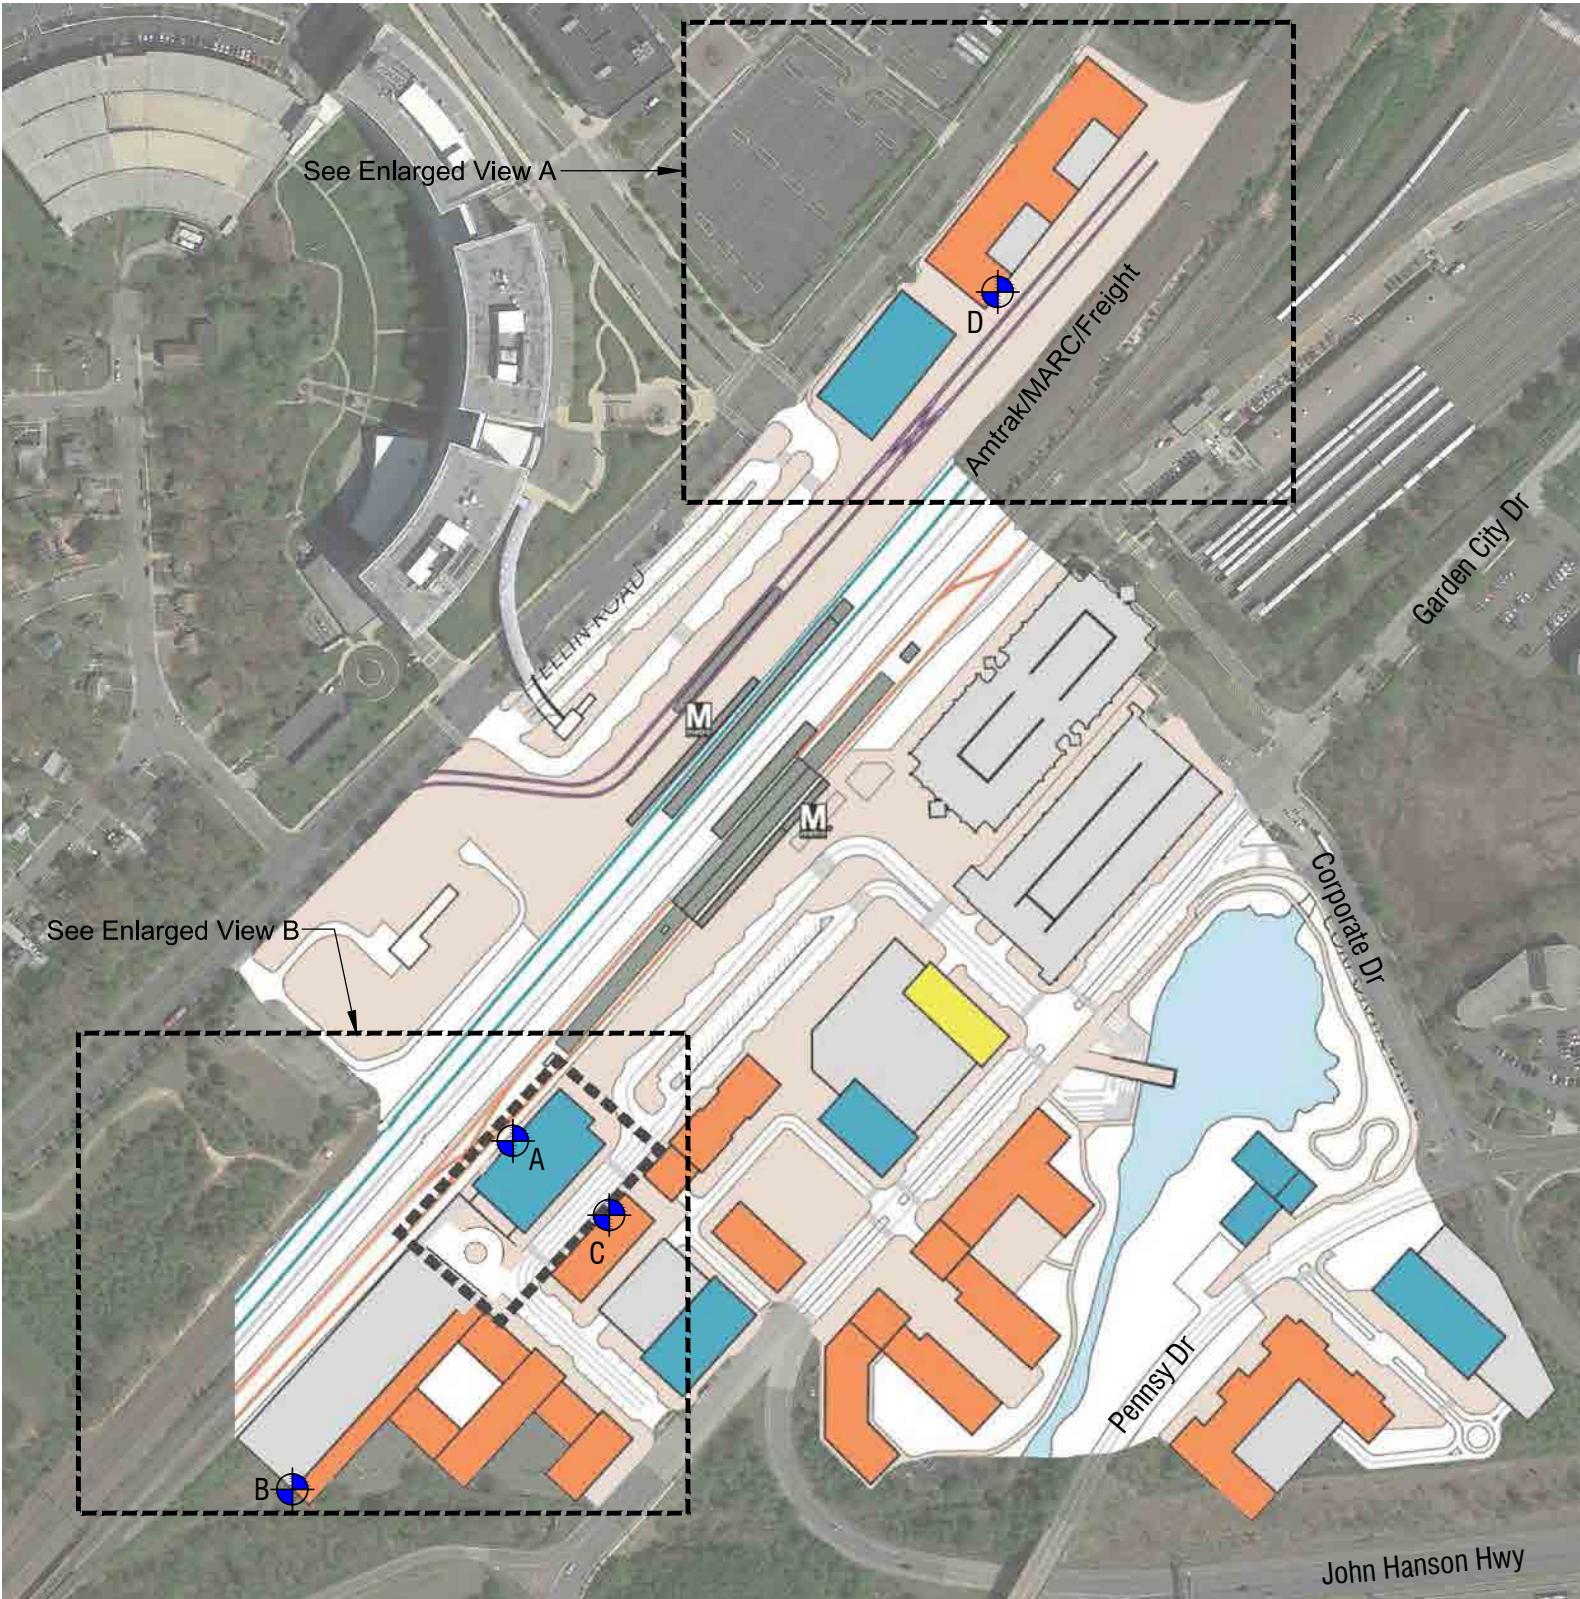

LEGEND

	VIBRATION MEASUREMENT LOCATION		RESIDENTIAL & RETAIL
	ORANGE LINE		OFFICE & RETAIL
	Amtrak/MARC/Freight		HOTEL & RETAIL
	PURPLE LINE		



PHOENIX
noise & vibration
5216 Chairmans Court Suite 107
Frederick, MD 21703
301-846-4227

New Carrollton

VIBRATION MEASUREMENT LOCATIONS

DWG. No.	PRJ. No.	DATE
1	UAD1601	160725
SCALE	NOT TO SCALE	DRAWN BY WCC

Figure 1: Measured vibration levels over a 24-hour period at Location A.

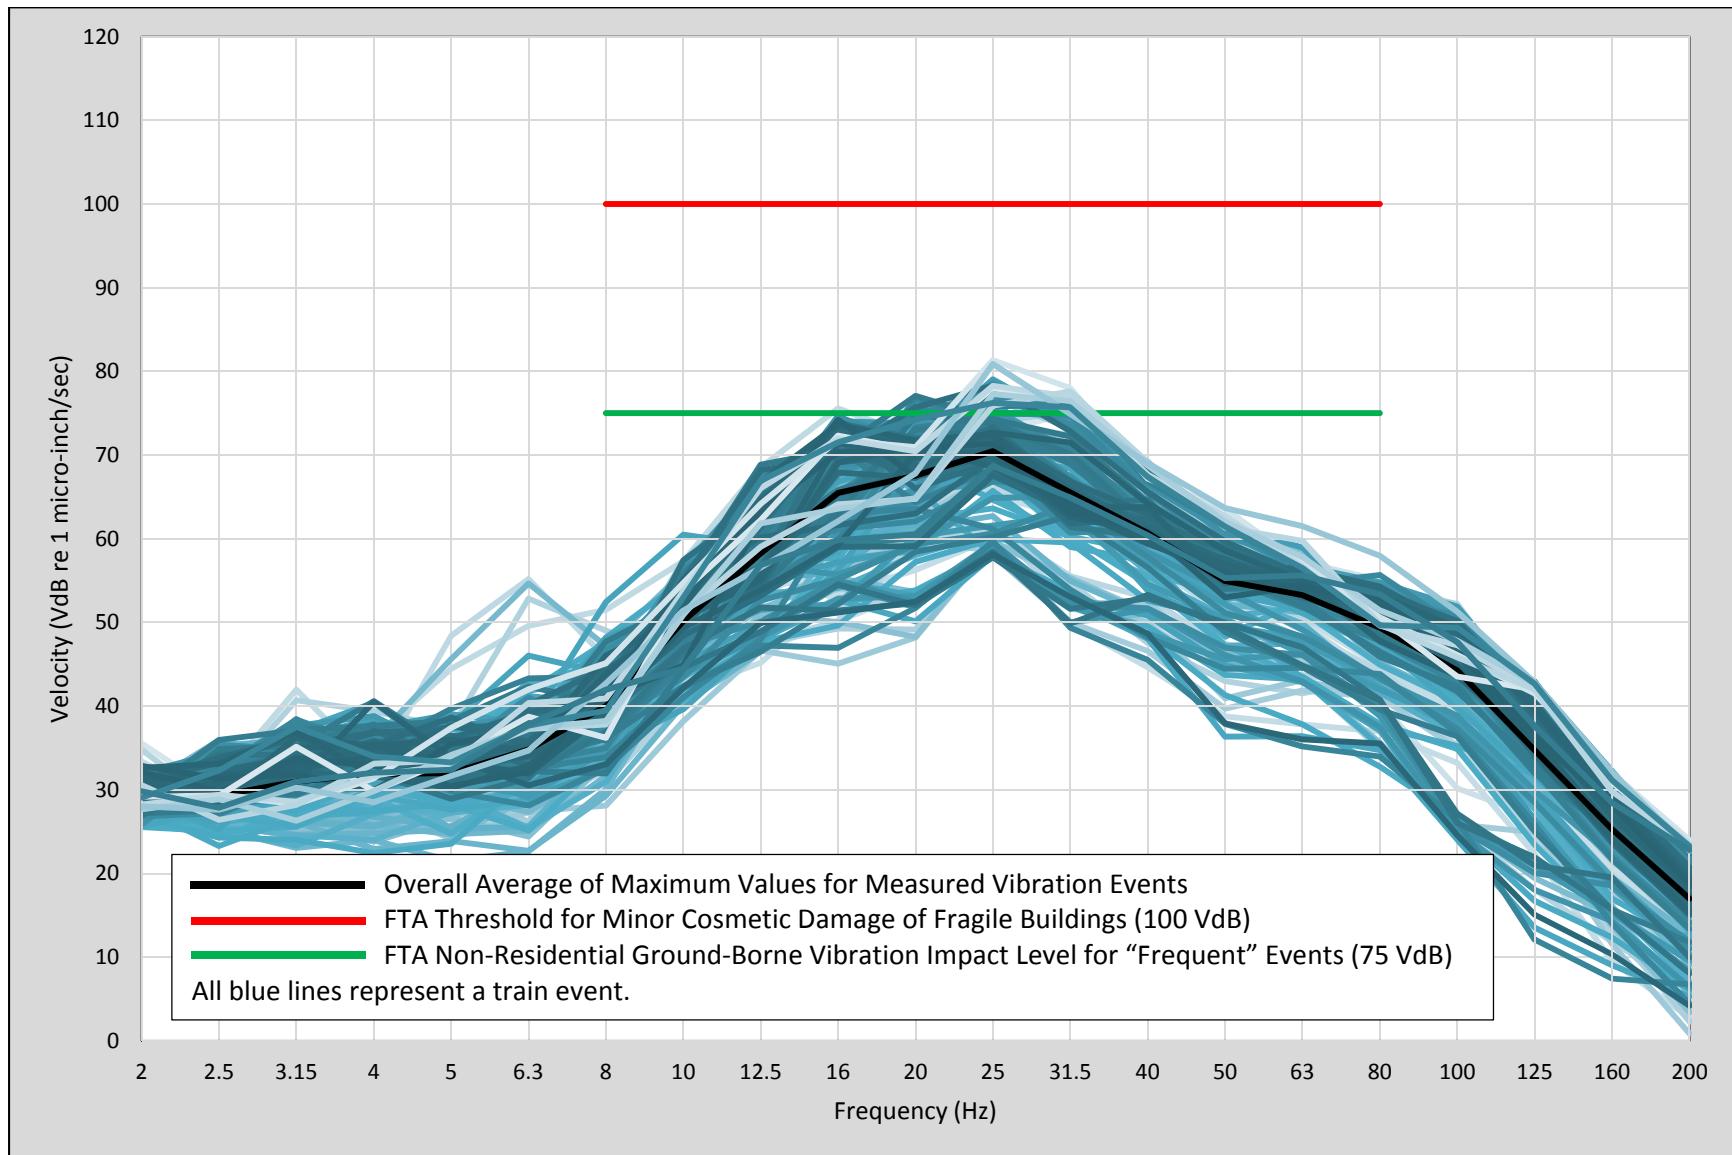


Figure 2: Measured vibration levels over a 24-hour period at Location B.

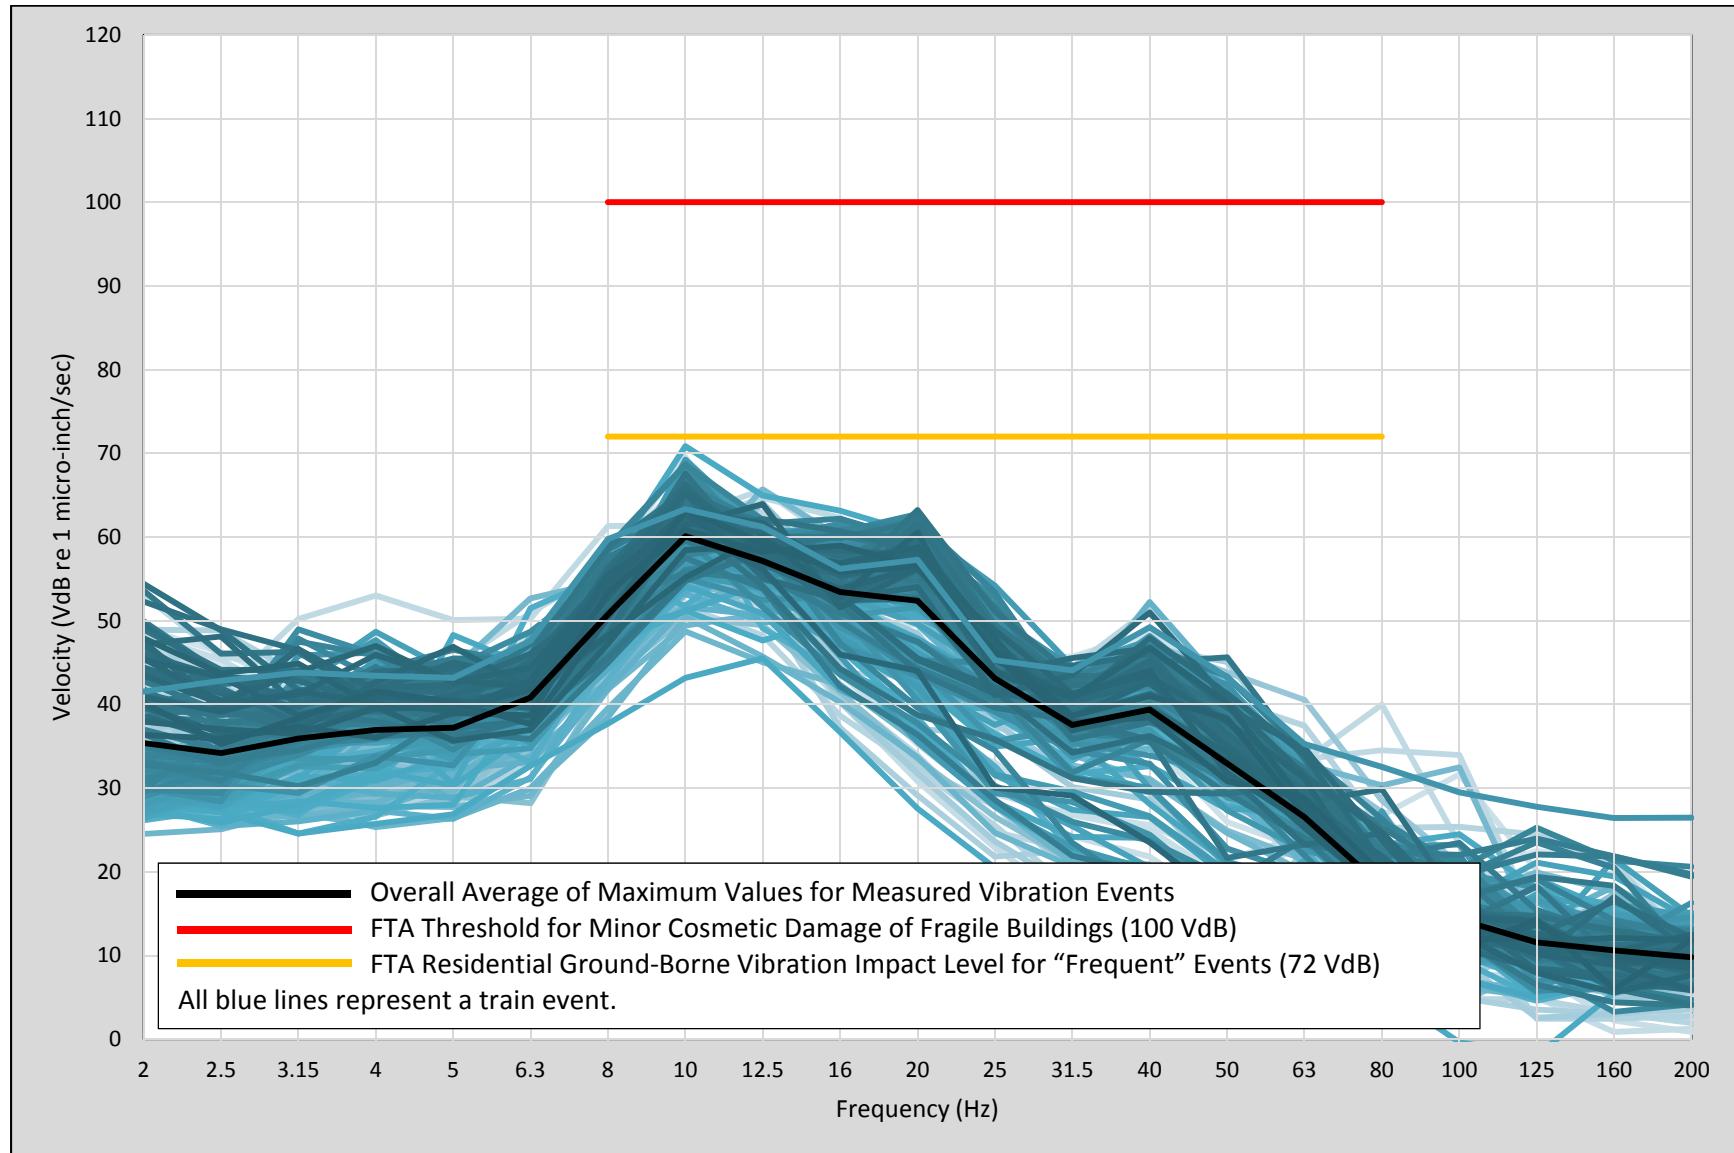


Figure 3: Measured vibration levels over a 24-hour period at Location C.


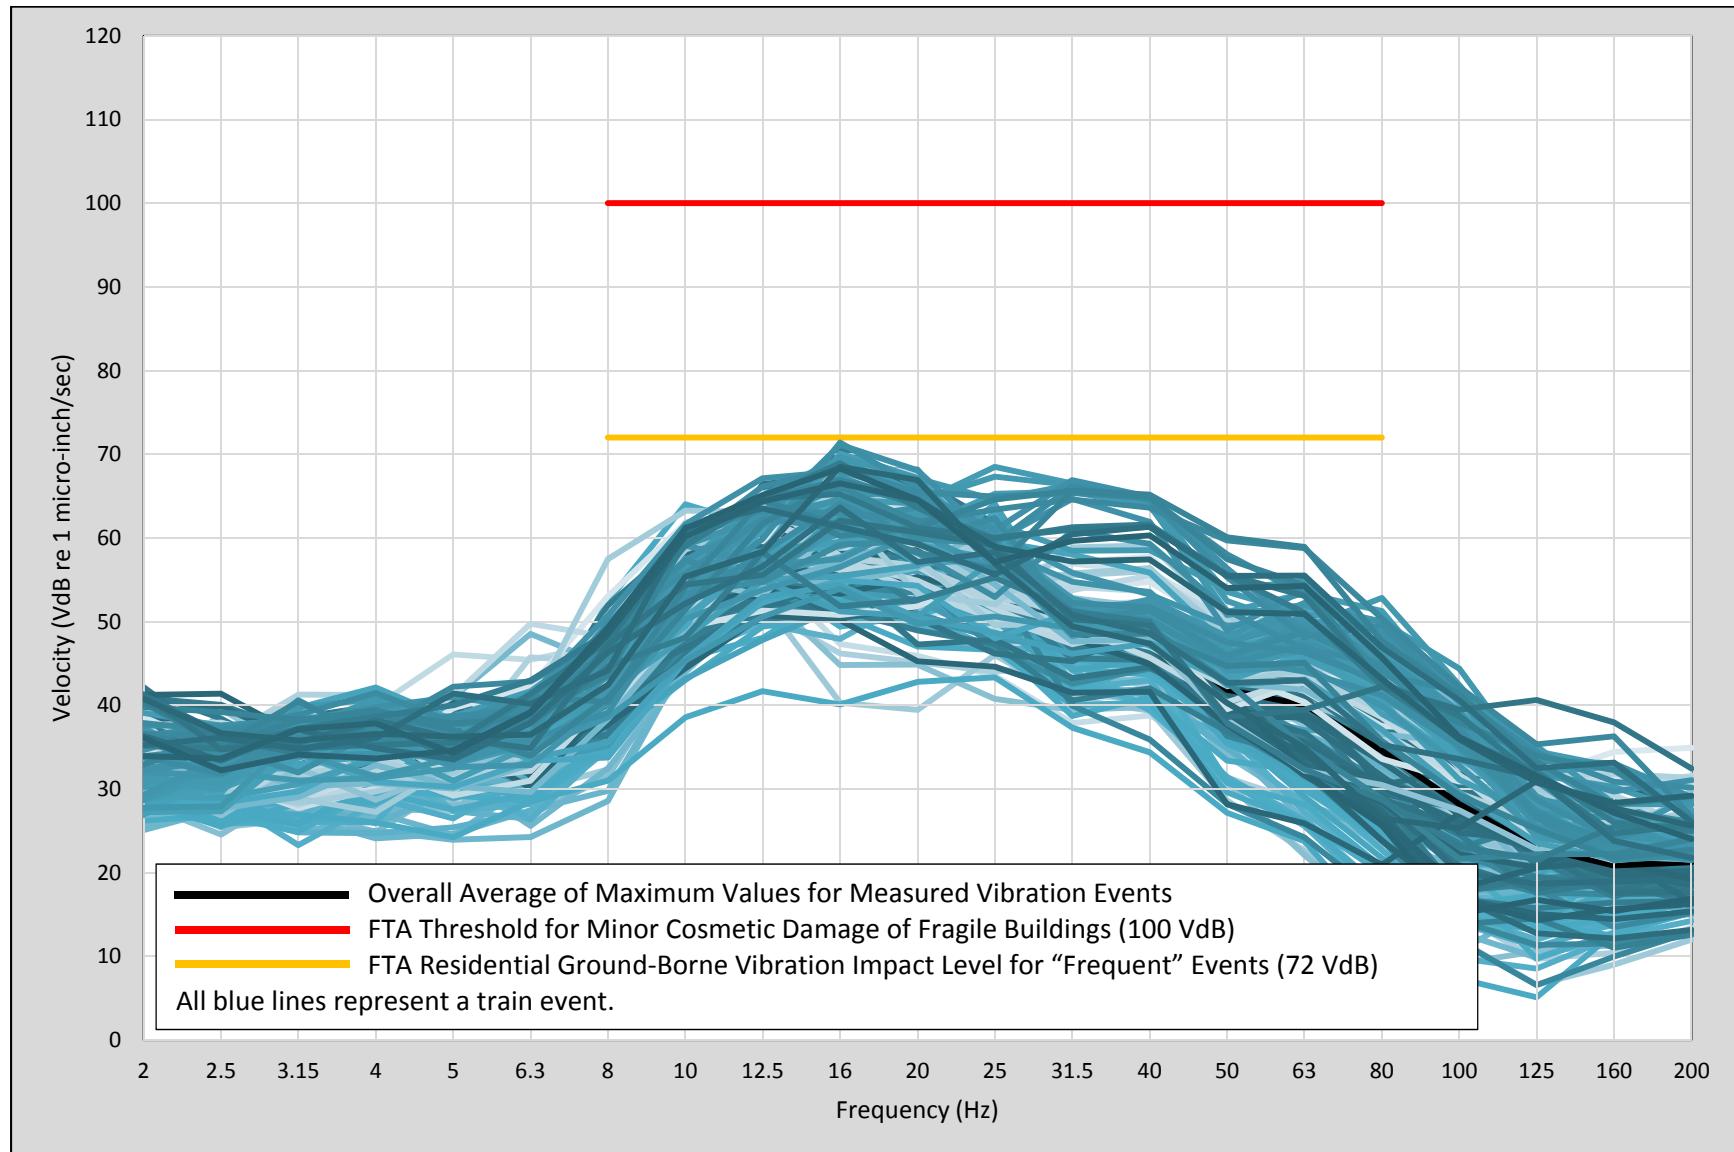


Figure 4: Measured vibration levels over a 24-hour period at Location D.

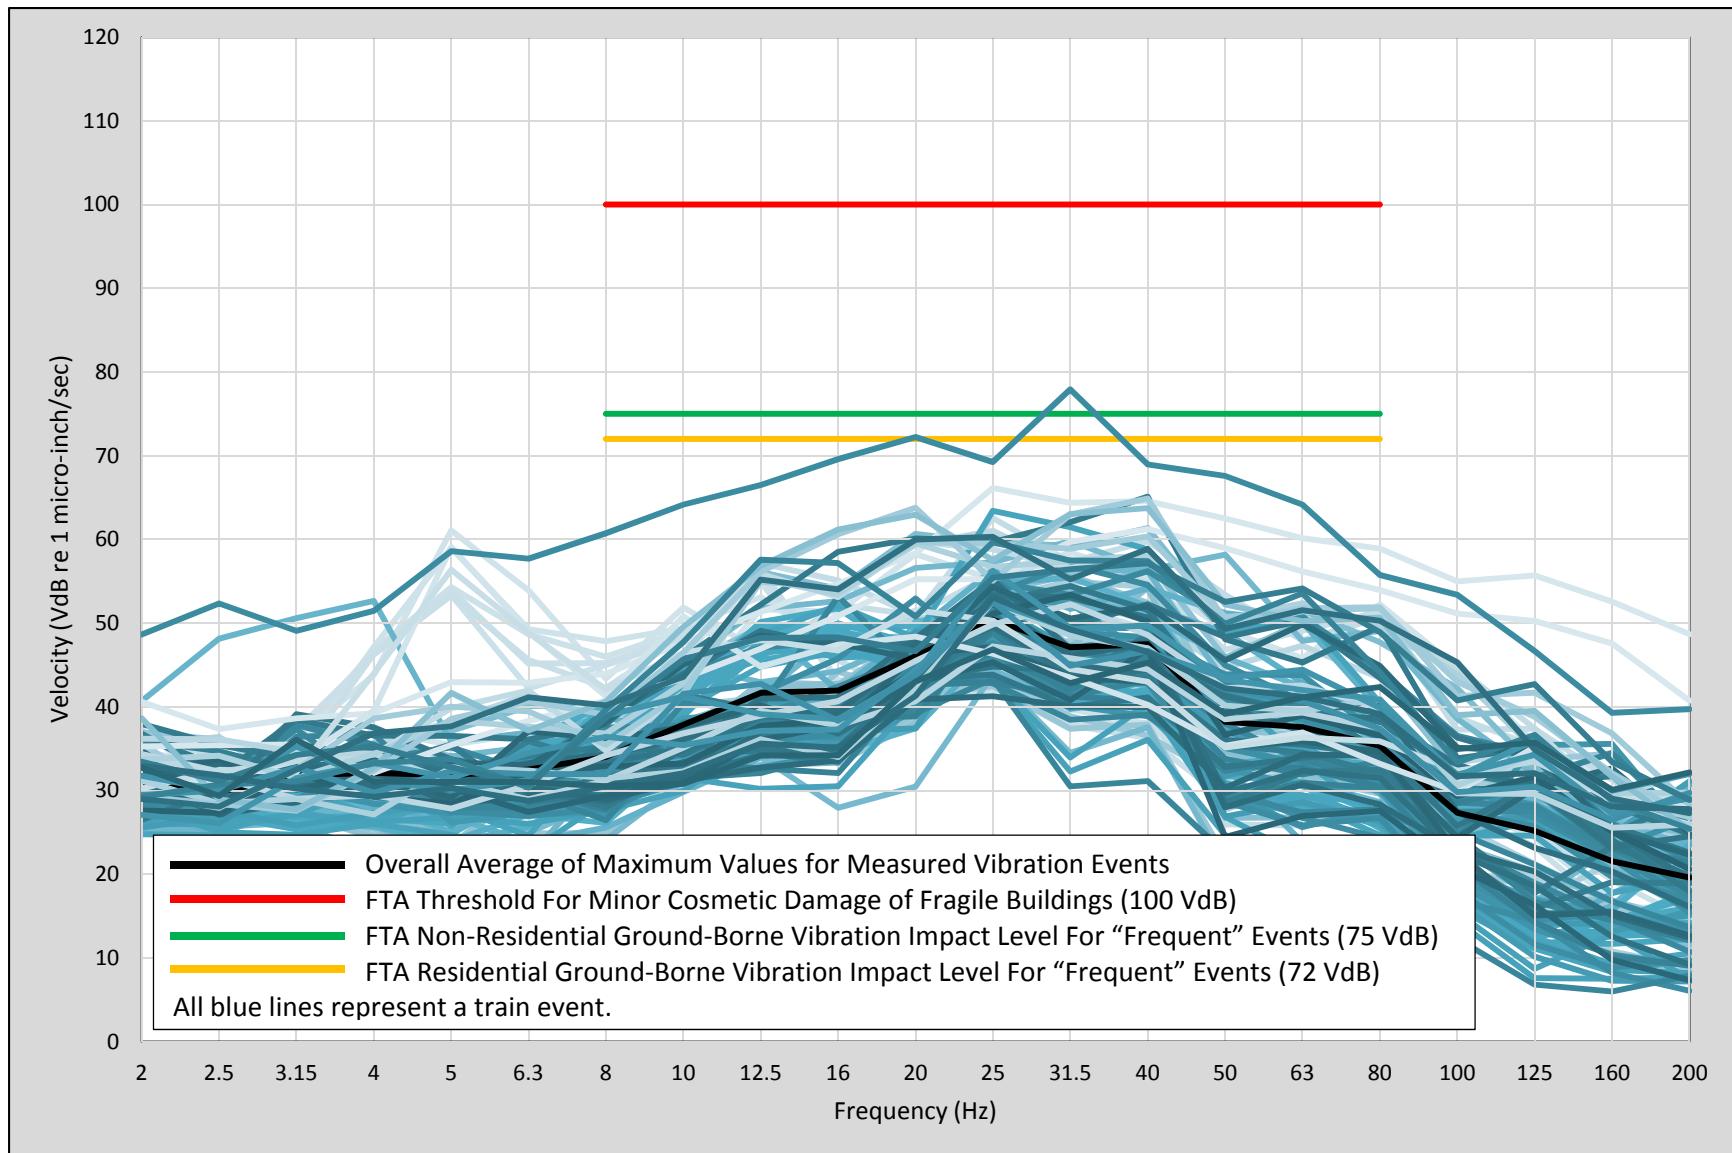

situations where potential impacts from freight train ground-borne vibration will need to be evaluated. The prime example is when freight train tracks must be relocated to provide space for a transit project within a railroad right-of-way. Some guidelines for applying these criteria to freight train operations are given later in this chapter.

8.1 VIBRATION IMPACT CRITERIA FOR GENERAL ASSESSMENT

8.1.1 Sensitive-Use Categories

The criteria for acceptable ground-borne vibration are expressed in terms of rms velocity levels in decibels and the criteria for acceptable ground-borne noise are expressed in terms of A-weighted sound levels. The limits are specified for the three land-use categories defined below:

- **Vibration Category 1 - High Sensitivity:** Included in Category 1 are buildings where vibration would interfere with operations within the building, including levels that may be well below those associated with human annoyance. Concert halls and other special-use facilities are covered separately in Table 8-2. Typical land uses covered by Category 1 are: vibration-sensitive research and manufacturing, hospitals with vibration-sensitive equipment, and university research operations. The degree of sensitivity to vibration will depend on the specific equipment that will be affected by the vibration. Equipment such as electron microscopes and high resolution lithographic equipment can be very sensitive to vibration, and even normal optical microscopes will sometimes be difficult to use when vibration is well below the human annoyance level. Manufacturing of computer chips is an example of a vibration-sensitive process.

The vibration limits for Vibration Category 1 are based on acceptable vibration for moderately vibration-sensitive equipment such as optical microscopes and electron microscopes with vibration isolation systems. Defining limits for equipment that is even more sensitive requires a detailed review of the specific equipment involved. This type of review is usually performed during the Detailed Analysis associated with the final design phase and not as part of the environmental impact assessment. Mitigation of transit vibration that affects sensitive equipment typically involves modification of the equipment mounting system or relocation of the equipment rather than applying vibration control measures to the transit project.

Note that this category does not include most computer installations or telephone switching equipment. Although the owners of this type of equipment often are very concerned about the potential of ground-borne vibration interrupting smooth operation of their equipment, it is rare for computer or other electronic equipment to be particularly sensitive to vibration. Most such equipment is designed to operate in typical building environments where the equipment may experience occasional shock from bumping and continuous background vibration caused by other equipment.

- **Vibration Category 2 - Residential:** This category covers all residential land uses and any buildings where people sleep, such as hotels and hospitals. No differentiation is made between different types of residential areas. This is primarily because ground-borne vibration and noise are experienced indoors and building occupants have practically no means to reduce their exposure. Even in a noisy

urban area, the bedrooms often will be quiet in buildings that have effective noise insulation and tightly closed windows. Moreover, street traffic often abates at night when transit continues to operate. Hence, an occupant of a bedroom in a noisy urban area is likely to be just as exposed to ground-borne noise and vibration as someone in a quiet suburban area. The criteria apply to the transit-generated ground-borne vibration and noise whether the source is subway or surface running trains.

- **Vibration Category 3 - Institutional:** Vibration Category 3 includes schools, churches, other institutions, and quiet offices that do not have vibration-sensitive equipment, but still have the potential for activity interference. Although it is generally appropriate to include office buildings in this category, it is not appropriate to include all buildings that have any office space. For example, most industrial buildings have office space, but it is not intended that buildings primarily for industrial use be included in this category.

Table 8-1. Ground-Borne Vibration (GBV) and Ground-Borne Noise (GBN) Impact Criteria for General Assessment

Land Use Category	GBV Impact Levels (VdB re 1 micro-inch /sec)			GBN Impact Levels (dB re 20 micro Pascals)		
	Frequent Events ¹	Occasional Events ²	Infrequent Events ³	Frequent Events ¹	Occasional Events ²	Infrequent Events ³
Category 1: Buildings where vibration would interfere with interior operations.	65 VdB ⁴	65 VdB ⁴	65 VdB ⁴	N/A ⁴	N/A ⁴	N/A ⁴
Category 2: Residences and buildings where people normally sleep.	72 VdB	75 VdB	80 VdB	35 dBA	38 dBA	43 dBA
Category 3: Institutional land uses with primarily daytime use.	75 VdB	78 VdB	83 VdB	40 dBA	43 dBA	48 dBA
Notes:	1. "Frequent Events" is defined as more than 70 vibration events of the same source per day. Most rapid transit projects fall into this category. 2. "Occasional Events" is defined as between 30 and 70 vibration events of the same source per day. Most commuter trunk lines have this many operations. 3. "Infrequent Events" is defined as fewer than 30 vibration events of the same kind per day. This category includes most commuter rail branch lines. 4. This criterion limit is based on levels that are acceptable for most moderately sensitive equipment such as optical microscopes. Vibration-sensitive manufacturing or research will require detailed evaluation to define the acceptable vibration levels. Ensuring lower vibration levels in a building often requires special design of the HVAC systems and stiffened floors. 5. Vibration-sensitive equipment is generally not sensitive to ground-borne noise.					